



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 444K 1DW444KZTHF678950**

Component  
**Transmission**

Fluid  
**JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0197844</b>	JR0139521	JR050202
Sample Date		Client Info		<b>07 Feb 2024</b>	23 Jan 2023	10 Jun 2020
Machine Age	hrs	Client Info		<b>4409</b>	3552	1954
Oil Age	hrs	Client Info		<b>2811</b>	3552	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	<b>16</b>	13	11
Iron	ppm	ASTM D5185m	>61	<b>19</b>	23	20
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m	>9	<b>2</b>	1	<1
Copper	ppm	ASTM D5185m	>100	<b>12</b>	11	9
Tin	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>21	<b>10</b>	15	19
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	3
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>30	<b>8</b>	10	19
Boron	ppm	ASTM D5185m		<b>3</b>	<1	3
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>79</b>	87	76
Calcium	ppm	ASTM D5185m		<b>3058</b>	3264	3157
Phosphorus	ppm	ASTM D5185m		<b>898</b>	954	998
Zinc	ppm	ASTM D5185m		<b>1128</b>	1169	1140
Sulfur	ppm	ASTM D5185m		<b>3173</b>	3859	2905
Visc @ 40°C	cSt	ASTM D445	59	<b>46.2</b>	46.2	42.5


Viscosity @ 40°C

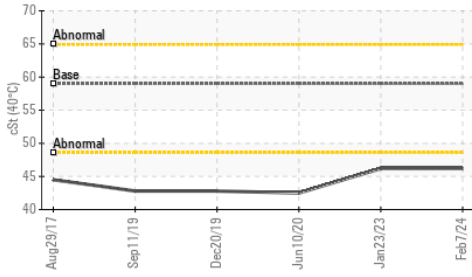


PQ

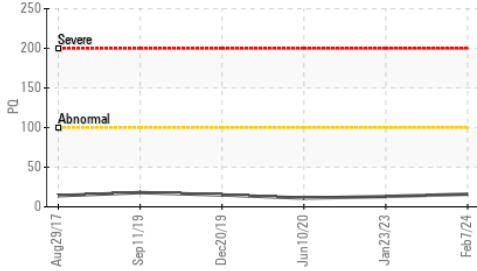


Ferrous Alloys

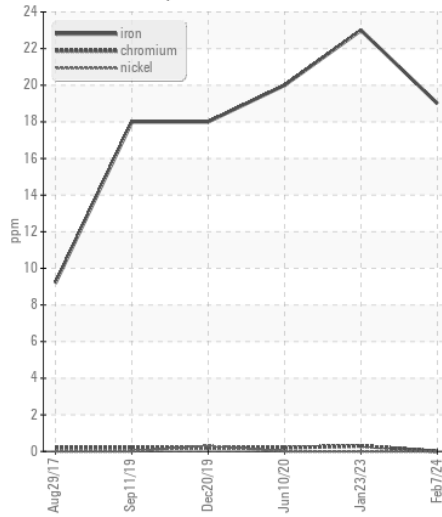


PQ

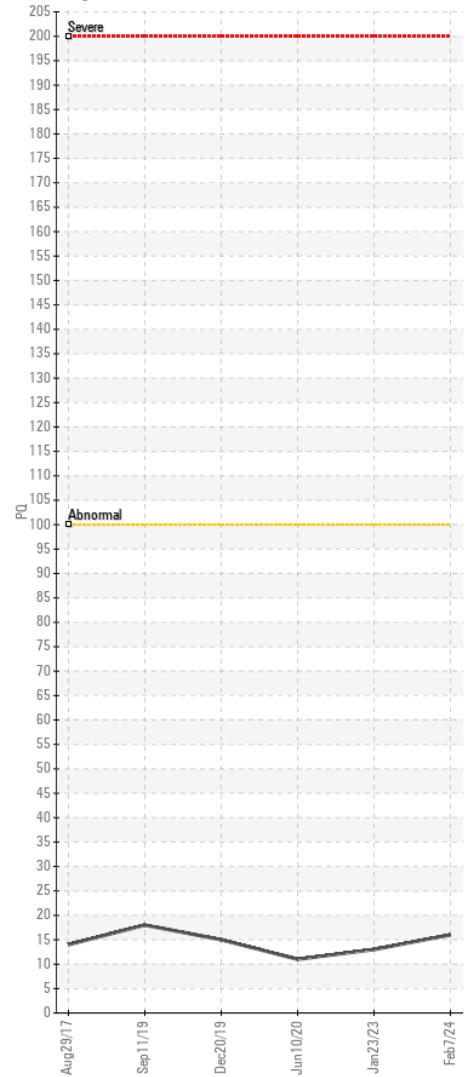

Non-ferrous Metals

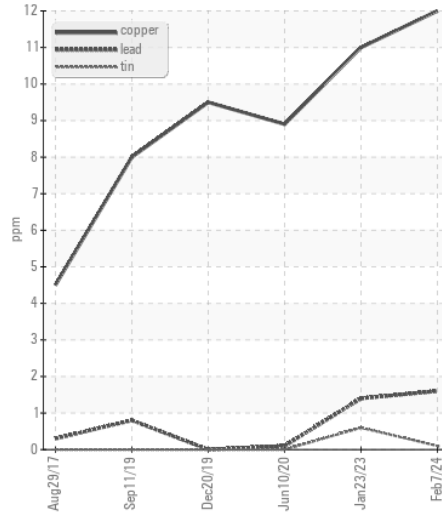

Viscosity @ 40°C

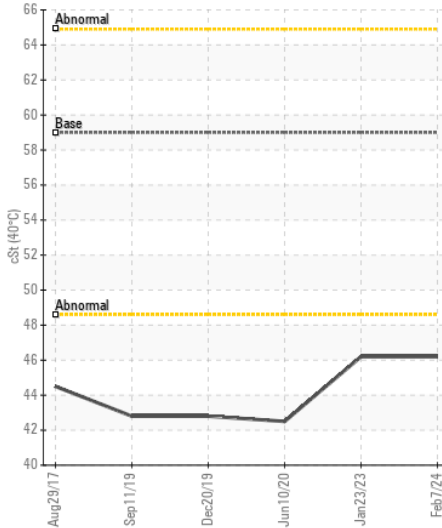

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0197844 **Received** : 09 Feb 2024  
**Lab Number** : 06085013 **Tested** : 11 Feb 2024  
**Unique Number** : 10872458 **Diagnosed** : 12 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529  
 Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com  
 T: (919)614-2260  
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)