



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W15474]

Machine Id

JOHN DEERE 210 P 1FF210PAAPF000840

Component

Left Final Drive

Fluid

JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W15474)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196415	---	---
Sample Date		Client Info		08 Feb 2024	---	---
Machine Age	hrs	Client Info		581	---	---
Oil Age	hrs	Client Info		581	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	233	---	---
Iron	ppm	ASTM D5185m	>750	194	---	---
Chromium	ppm	ASTM D5185m	>9	4	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	35	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	---	---
Boron	ppm	ASTM D5185m		74	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		24	---	---
Phosphorus	ppm	ASTM D5185m		433	---	---
Zinc	ppm	ASTM D5185m		3	---	---
Sulfur	ppm	ASTM D5185m		13596	---	---
Visc @ 40°C	cSt	ASTM D445		187	---	---

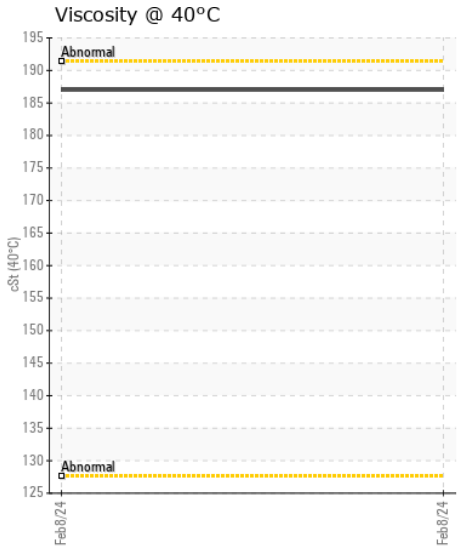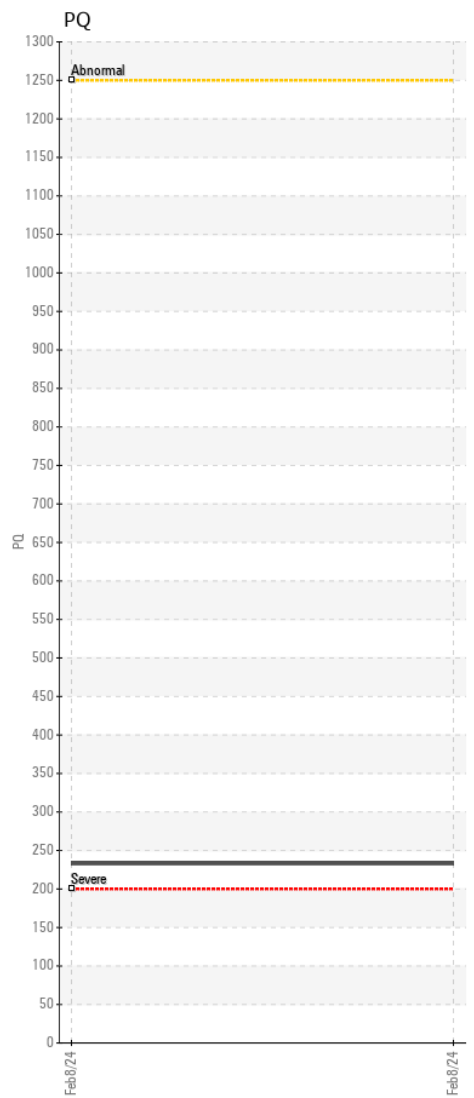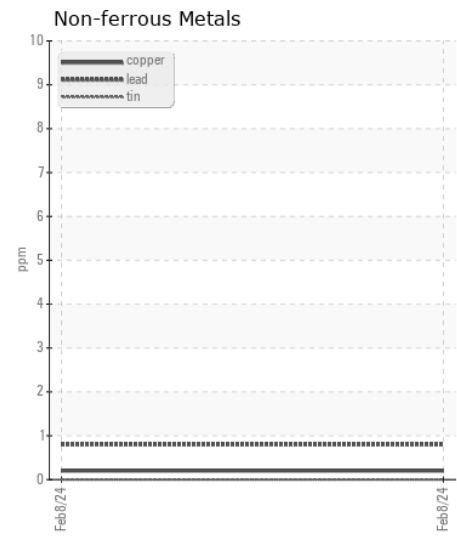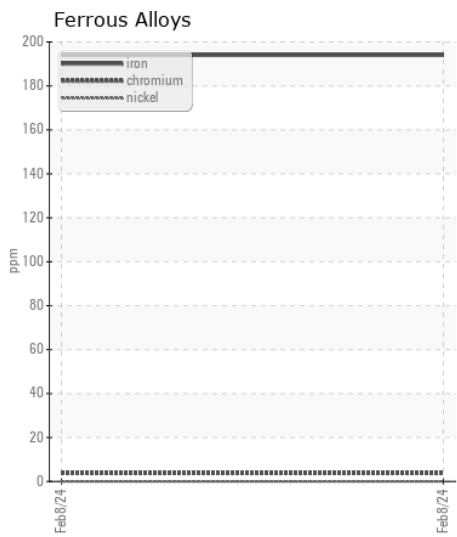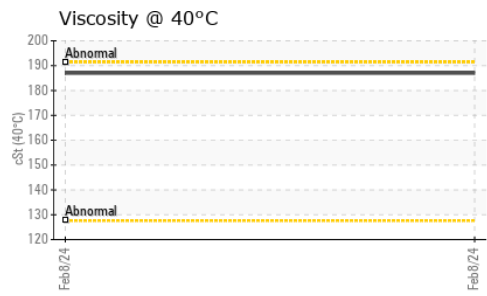

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196415 **Received** : 09 Feb 2024
Lab Number : 06085024 **Tested** : 11 Feb 2024
Unique Number : 10872469 **Diagnosed** : 12 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: WILMINGTON SHOP
 todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (910)675-9211

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: