



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 650K 1T0650KXCEE268735**  
Component  
**Right Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0191356</b>	JR0176790	JR0149596
Sample Date		Client Info		<b>31 Jan 2024</b>	27 Jul 2023	02 Nov 2022
Machine Age	hrs	Client Info		<b>6533</b>	6090	5518
Oil Age	hrs	Client Info		<b>443</b>	1092	520
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>35</b>	28	15
Iron	ppm	ASTM D5185m	>750	<b>14</b>	31	12
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m	>15	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>4</b>	9	5
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	2	0
Boron	ppm	ASTM D5185m	6	<b>&lt;1</b>	2	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m	145	<b>91</b>	102	90
Calcium	ppm	ASTM D5185m	3570	<b>3232</b>	3346	3438
Phosphorus	ppm	ASTM D5185m	1290	<b>926</b>	977	919
Zinc	ppm	ASTM D5185m	1640	<b>1147</b>	1196	1132
Sulfur	ppm	ASTM D5185m		<b>3404</b>	4216	3026
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.7</b>	51.6	53.2

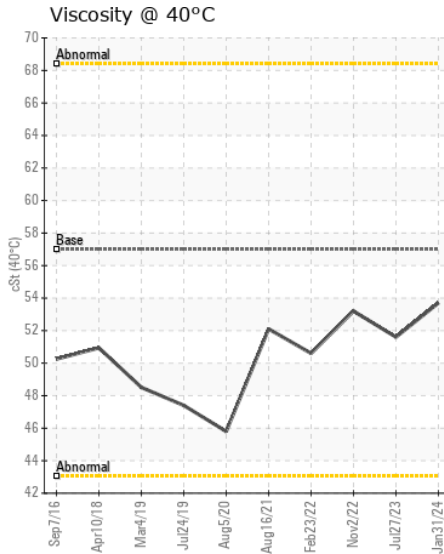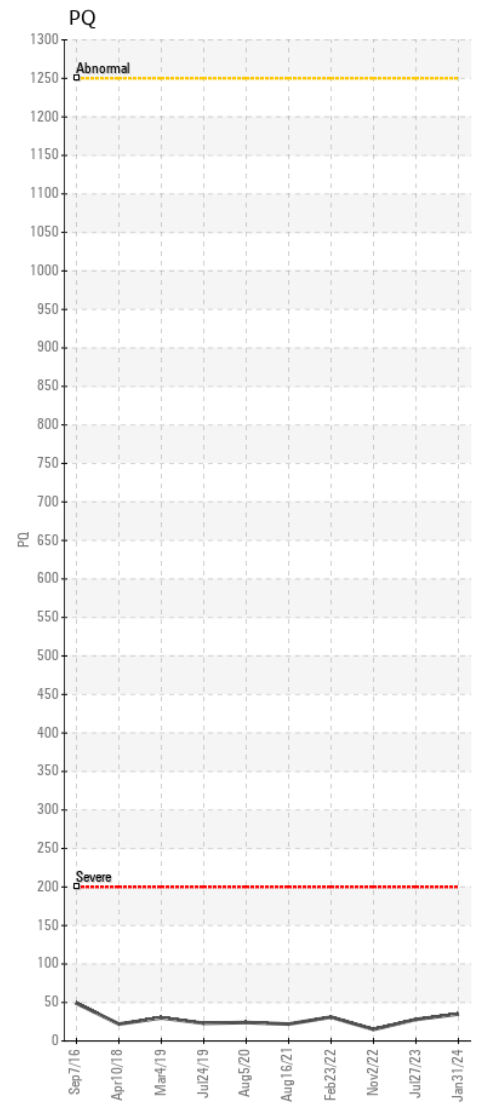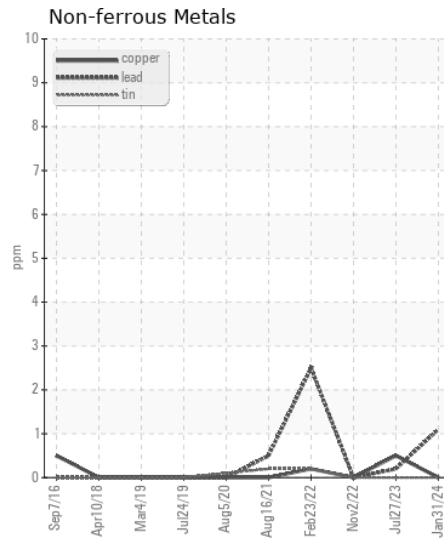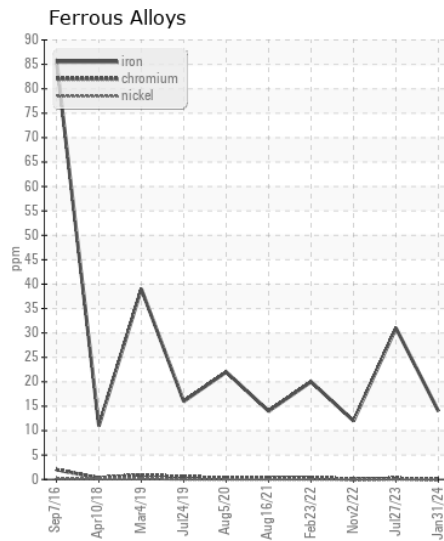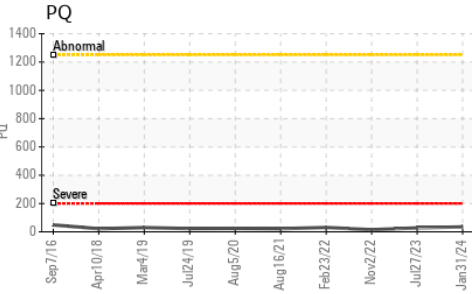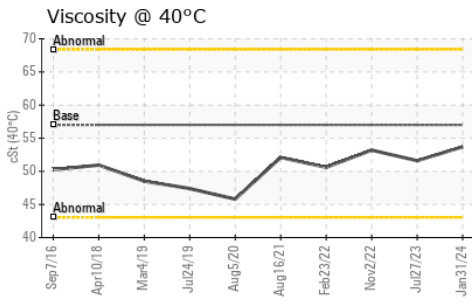

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0191356 **Received** : 09 Feb 2024  
**Lab Number** : 06085044 **Tested** : 11 Feb 2024  
**Unique Number** : 10872489 **Diagnosed** : 11 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**TENNOCA CONSTRUCTION**  
 PO BOX 2379  
 CANDLER, NC  
 US 28715  
 Contact: MARK ROSS  
 mark@tennoca.com  
 T: (828)665-8331  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)