



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWO-069430]
Machine Id
VOLVO L70H 624496
Component
Rear Left Final Drive
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP431067	---	---
Sample Date		Client Info		06 Feb 2024	---	---
Machine Age	hrs	Client Info		1950	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1000	88	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>30	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	18	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		141	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		12	---	---
Manganese	ppm	ASTM D5185m		15	---	---
Magnesium	ppm	ASTM D5185m		14	---	---
Calcium	ppm	ASTM D5185m		4050	---	---
Phosphorus	ppm	ASTM D5185m		1409	---	---
Zinc	ppm	ASTM D5185m		1706	---	---
Sulfur	ppm	ASTM D5185m		4033	---	---
Visc @ 40°C	cSt	ASTM D445		39.5	---	---

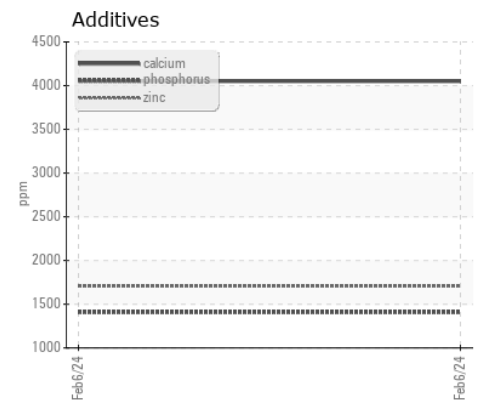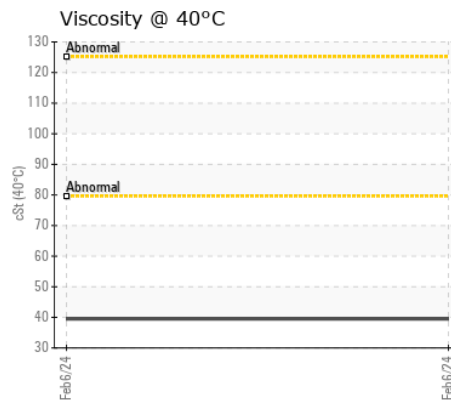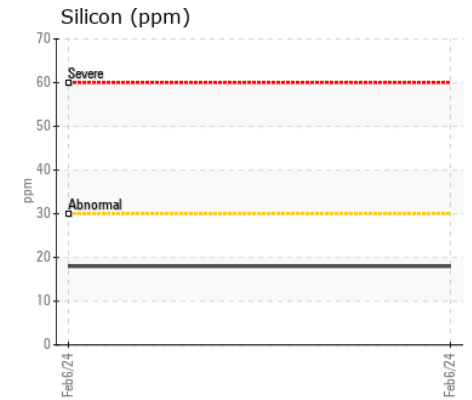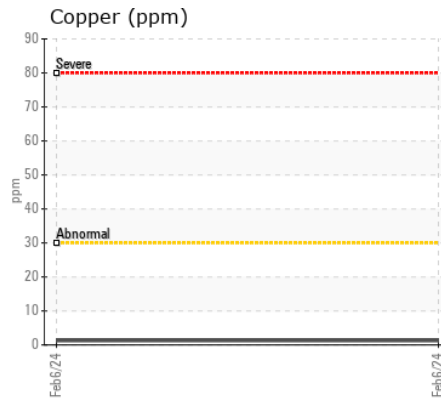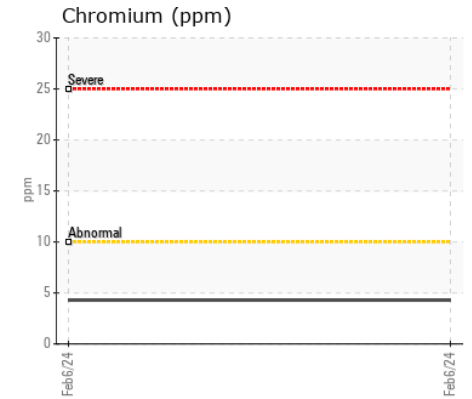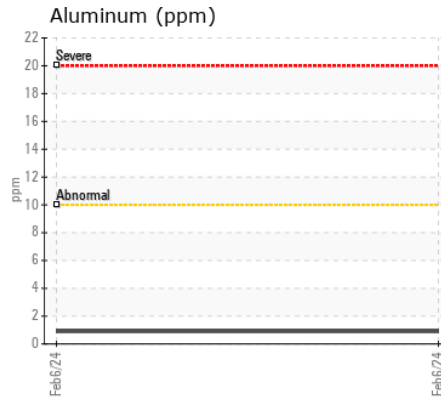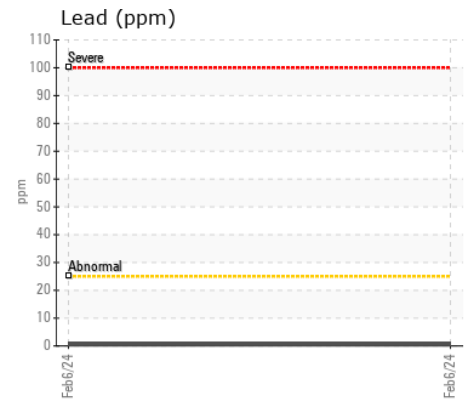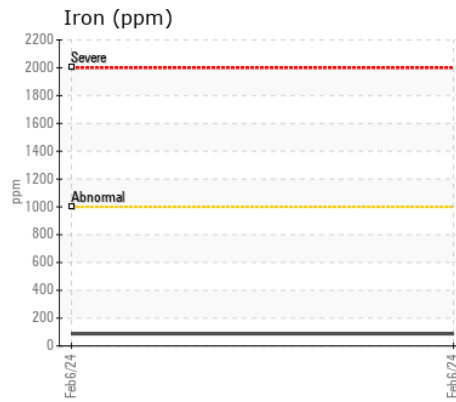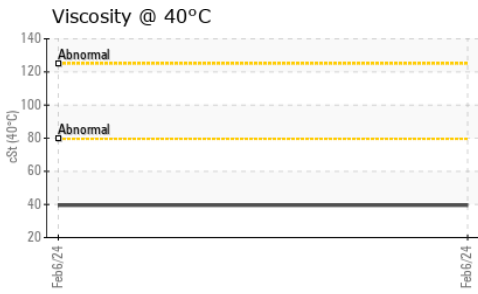

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP431067

Lab Number : 06085072

Unique Number : 10872517

Test Package : MOB 1

Received : 09 Feb 2024

Tested : 11 Feb 2024

Diagnosed : 12 Feb 2024 - Don Baldrige

SAIIA CONSTRUCTION LLC

4400 LEWISBURG RD

BIRMINGHAM, AL

US 35207

Contact: STEPHANI BRITTON

sbritton@saiia.com;doug.bogart@wearcheck.com

T: (205)943-2268

F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)