



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SWO-069429]
 Machine Id
EPIROC TMG21SED0346
 Component
Rear Right Final Drive
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry update for time on unit.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446744	VCP435522	VCP445799
Sample Date		Client Info		05 Feb 2024	20 Dec 2023	14 Nov 2023
Machine Age	hrs	Client Info		5020	4779	4528
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	125	92	85
Chromium	ppm	ASTM D5185m	>10	2	1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	2	<1
Lead	ppm	ASTM D5185m	>25	10	3	6
Copper	ppm	ASTM D5185m	>50	8	3	5
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	22	18	23
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m		2	0	1
Barium	ppm	ASTM D5185m		0	5	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		2	0	1
Magnesium	ppm	ASTM D5185m		1	0	<1
Calcium	ppm	ASTM D5185m		48	3	7
Phosphorus	ppm	ASTM D5185m		491	502	471
Zinc	ppm	ASTM D5185m		2	0	0
Sulfur	ppm	ASTM D5185m		2128	2715	2724
Visc @ 40°C	cSt	ASTM D445		220	219	220

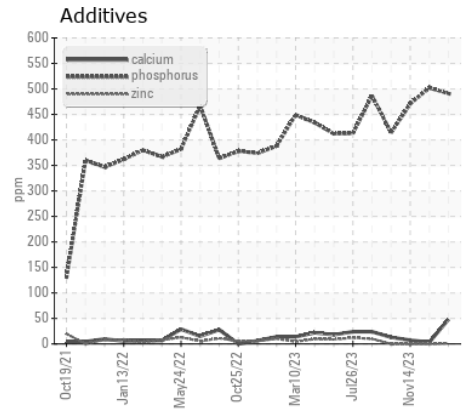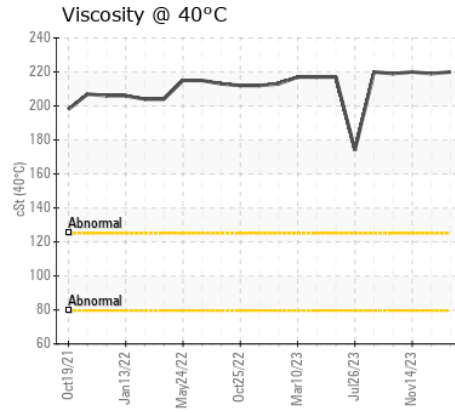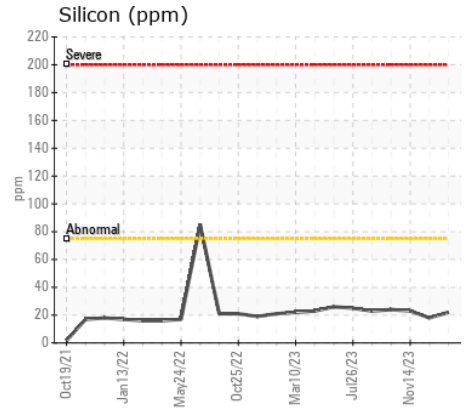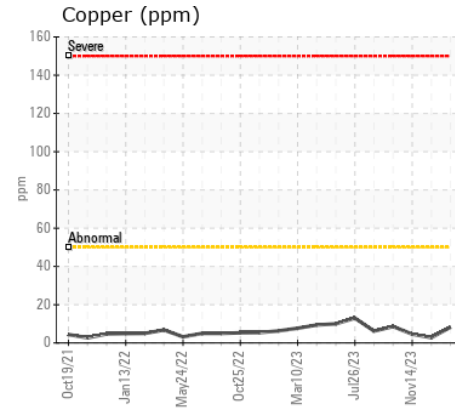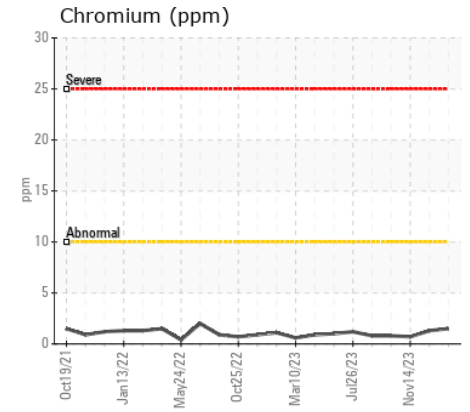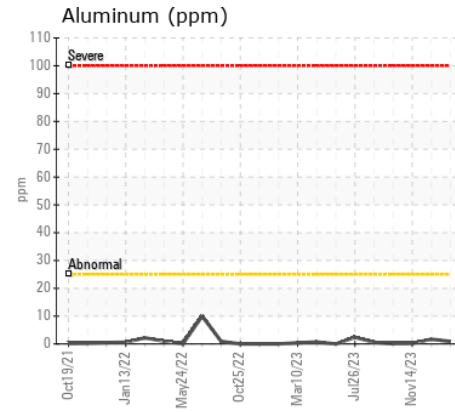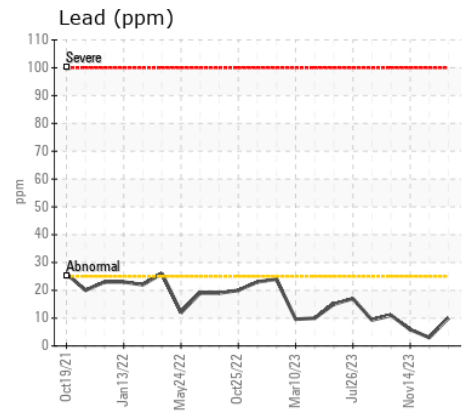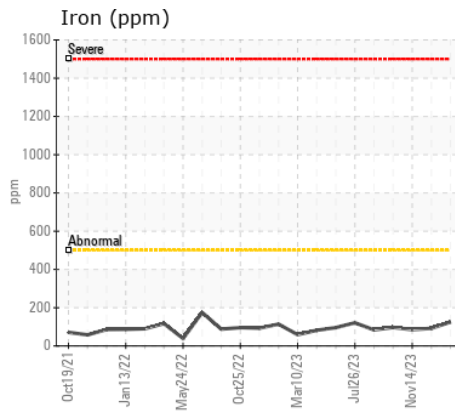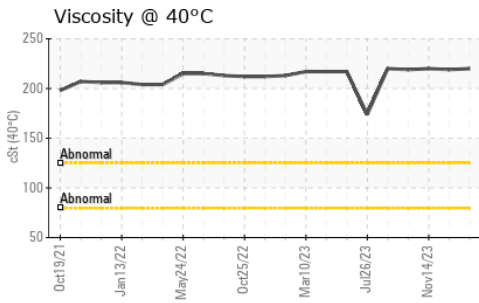

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP446744

Lab Number : 06085074

Unique Number : 10872519

Test Package : MOB 1

Received : 09 Feb 2024

Tested : 13 Feb 2024

Diagnosed : 13 Feb 2024 - Doug Bogart

SAIIA CONSTRUCTION LLC

4400 LEWISBURG RD

BIRMINGHAM, AL

US 35207

Contact: STEPHANI BRITTON

sbritton@saiia.com;doug.bogart@wearcheck.com

T: (205)943-2268

F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)