



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L90F RL-11 (S/N L90FV68265)
Component
Diesel Engine
Fluid
DURAMAX 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0034605	DC0030469	DC0022299
Sample Date		Client Info		23 Jan 2024	24 Jul 2023	18 May 2022
Machine Age	hrs	Client Info		2953	14899	15444
Oil Age	hrs	Client Info		500	500	0
Filter Age	hrs	Client Info		500	500	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	5	7
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	1
Lead	ppm	ASTM D5185m	>20	<1	0	<1
Copper	ppm	ASTM D5185m	>15	1	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	3	3
Potassium	ppm	ASTM D5185m	>20	2	2	1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.8	6.7	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.3	16.7	17.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	1
Boron	ppm	ASTM D5185m		4	3	8
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		3	3	4
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		45	44	57
Calcium	ppm	ASTM D5185m		2475	2293	2453
Phosphorus	ppm	ASTM D5185m		938	880	908
Zinc	ppm	ASTM D5185m		1167	1059	1104
Sulfur	ppm	ASTM D5185m		3962	4077	3893
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.9	9.4	9.8
Base Number (BN)	mg KOH/g	ASTM D2896		6.7	7.0	7.2
Visc @ 100°C	cSt	ASTM D445		13.7	13.7	13.8

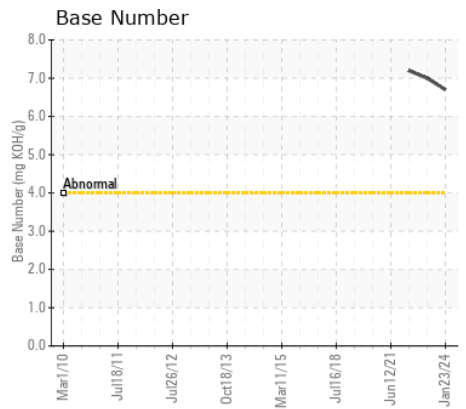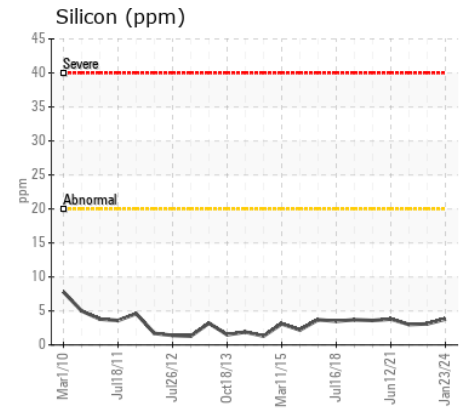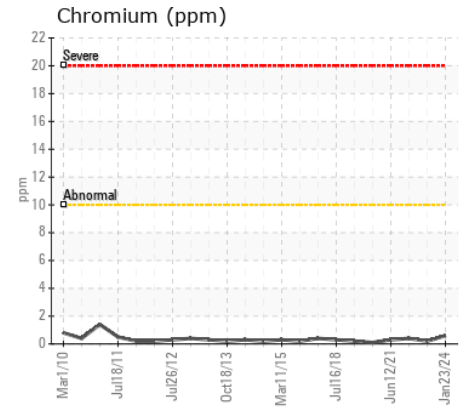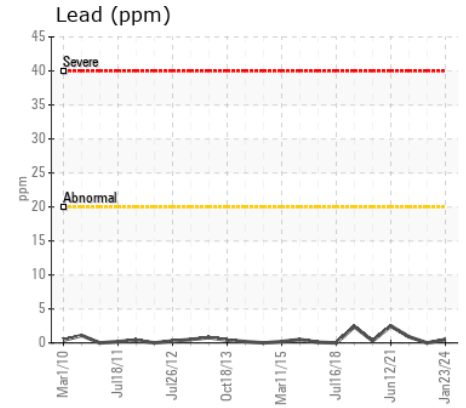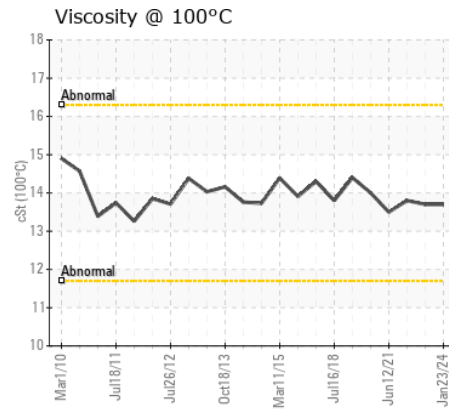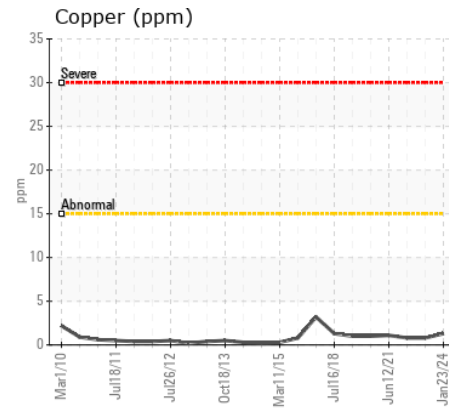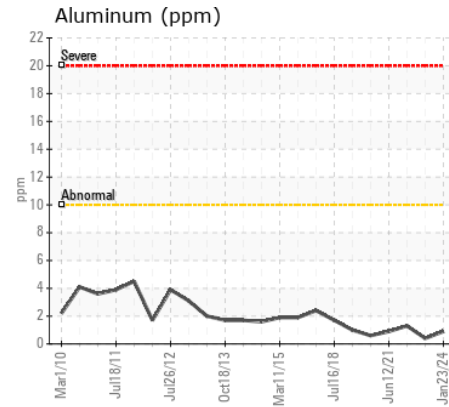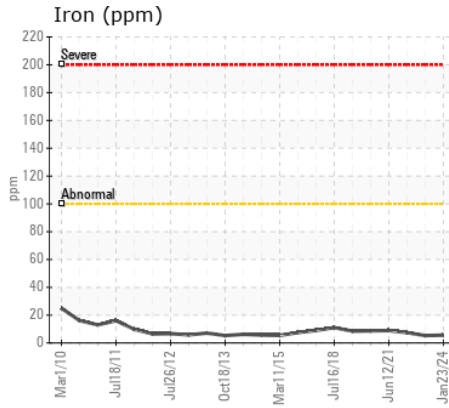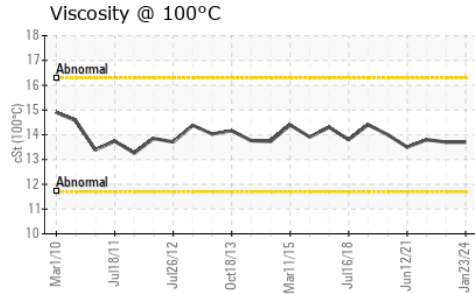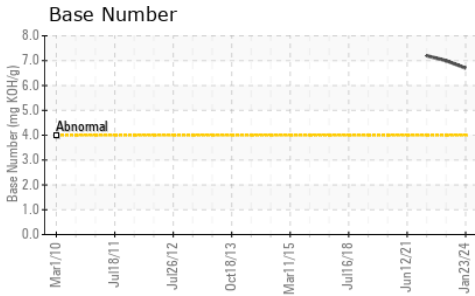

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0034605 **Received** : 09 Feb 2024
Lab Number : 06085208 **Tested** : 12 Feb 2024
Unique Number : 10872653 **Diagnosed** : 12 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

ROSS CONTRACTING INC.
 1007 RISING RIDGE ROAD
 MOUNT AIRY, MD
 US 21771
 Contact: JONATHAN KUENTZ
 jonathank@rosscontracting.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (301)831-5500 F: (301)831-5900