



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
151801

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06085216	IL05811310	IL05239850
Sample Date		Client Info		18 Jan 2024	14 Mar 2023	20 Apr 2021
Machine Age	hrs	Client Info		5406	0	2911
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	18	51	25
Chromium	ppm	ASTM D5185m	>20	<1	1	3
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	6	13
Lead	ppm	ASTM D5185m	>40	2	7	<1
Copper	ppm	ASTM D5185m	>330	2	5	52
Tin	ppm	ASTM D5185m	>15	<1	2	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	7	4
Potassium	ppm	ASTM D5185m	>20	1	2	42
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	▲ 3.7	1.2
Nitration	Abs/cm	*ASTM D7624	>20	8.9	18.6	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	▲ 31.8	24.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	0	4	3
Boron	ppm	ASTM D5185m	250	6	16	6
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	69	46	64
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	450	1014	588	801
Calcium	ppm	ASTM D5185m	3000	1212	1631	1169
Phosphorus	ppm	ASTM D5185m	1150	1107	779	831
Zinc	ppm	ASTM D5185m	1350	1331	1033	1104
Sulfur	ppm	ASTM D5185m	4250	3427	2802	2227
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	▲ 28.2	20.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.7	7.2	10.1
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	15.1	13.7

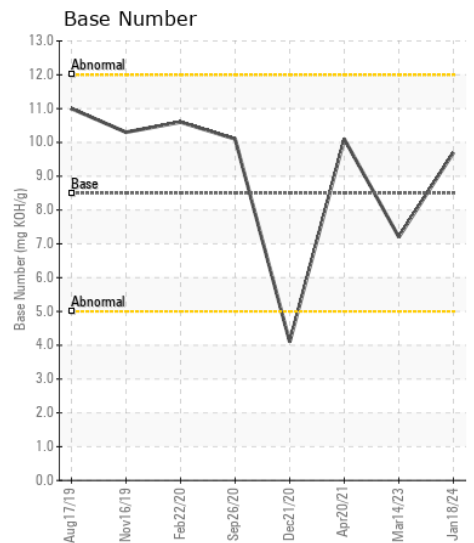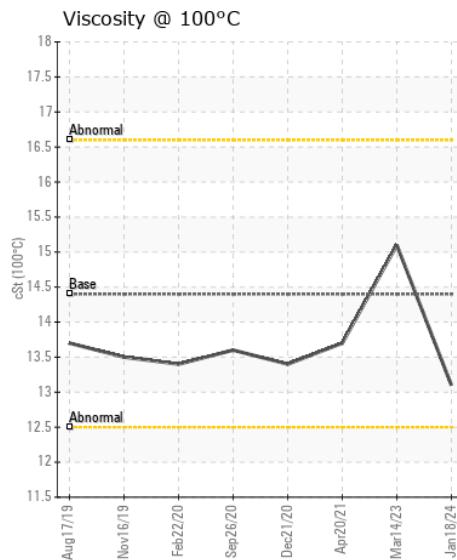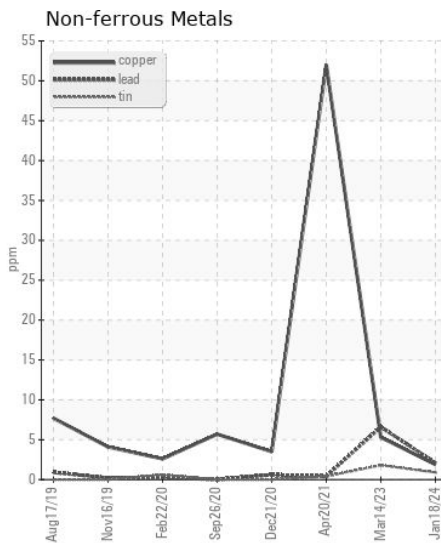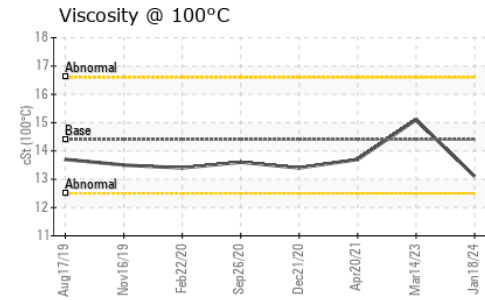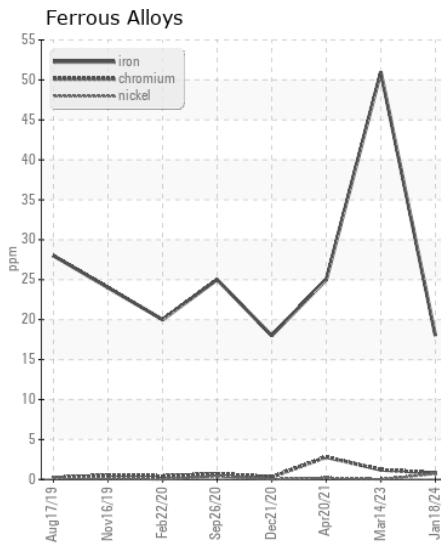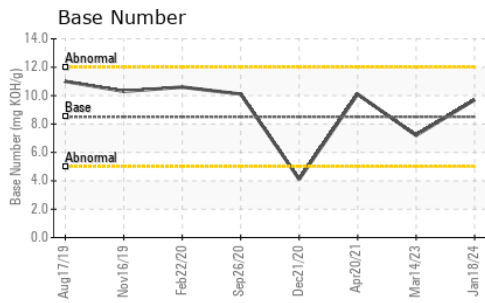

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06085216
Lab Number : 06085216
Unique Number : 10872661
Test Package : FLEET

Received : 09 Feb 2024
Tested : 12 Feb 2024
Diagnosed : 12 Feb 2024 - Wes Davis

RUSH TRUCK LEASING - CINCINNATI IDEALEASE
 11777 HIGHWAY DRIVE
 CINCINNATI, OH
 US 45241
 Contact: ROBERT BAIER
 baierr@rushenterprises.com
 T: (513)657-7901
 F: (513)733-0537

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)