



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**7817M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107704</b>	GFL0096516	GFL0096542
Sample Date		Client Info		<b>05 Feb 2024</b>	26 Oct 2023	29 Sep 2023
Machine Age	hrs	Client Info		<b>16532</b>	16143	15976
Oil Age	hrs	Client Info		<b>600</b>	600	600
Filter Age	hrs	Client Info		<b>600</b>	600	600
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	13	56
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	1	11
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	3	7
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	2	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.5	1.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	6.2	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	18.6	21.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>32</b>	0	5
Boron	ppm	ASTM D5185m	0	<b>3</b>	2	1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>69</b>	60	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1067</b>	891	936
Calcium	ppm	ASTM D5185m	1070	<b>1202</b>	1086	1045
Phosphorus	ppm	ASTM D5185m	1150	<b>1130</b>	990	1026
Zinc	ppm	ASTM D5185m	1270	<b>1389</b>	1205	1263
Sulfur	ppm	ASTM D5185m	2060	<b>3369</b>	3507	3183
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.8</b>	13.9	15.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.3</b>	8.9	7.8
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	14.1	13.8

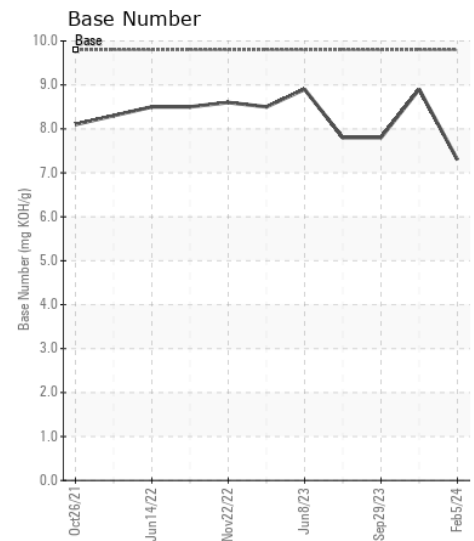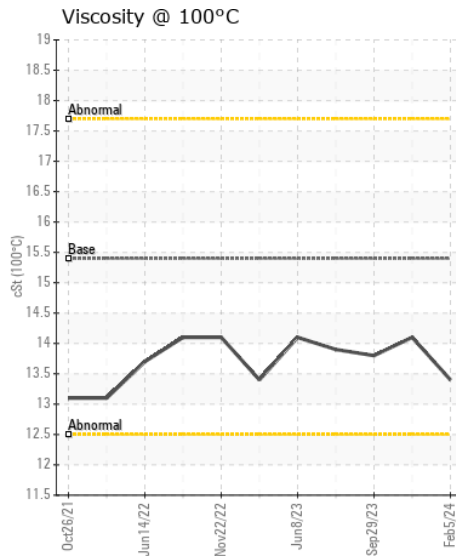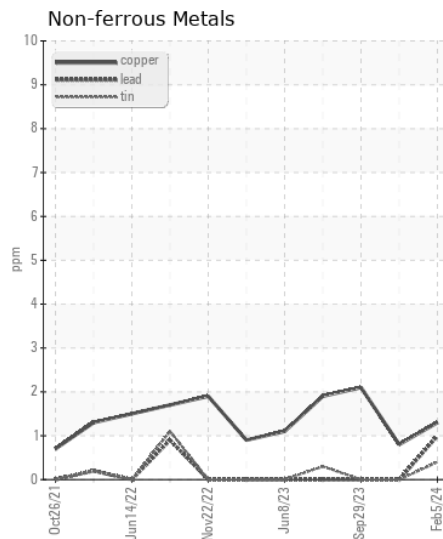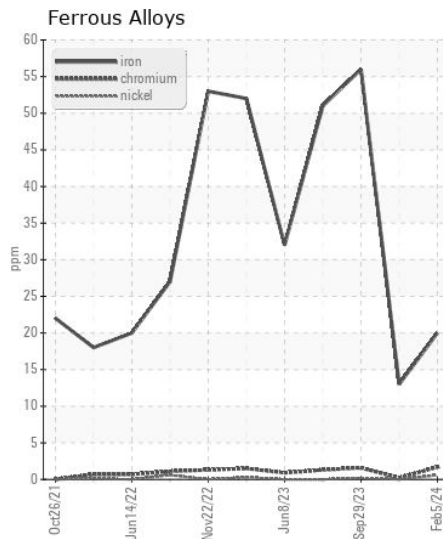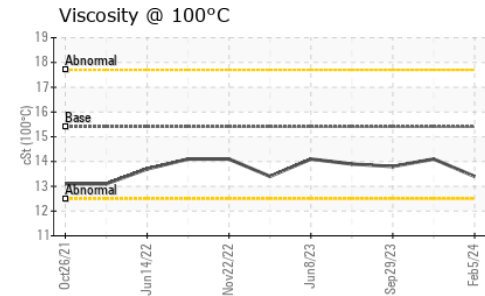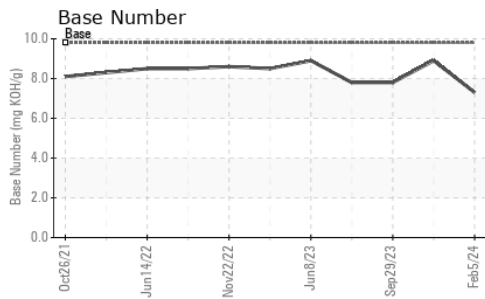

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107704  
**Lab Number** : 06085265  
**Unique Number** : 10872710  
**Test Package** : FLEET

**Received** : 09 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 12 Feb 2024 - Wes Davis

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340

Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: