



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**928055**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107705</b>	GFL0091501	GFL0081244
Sample Date		Client Info		<b>05 Feb 2024</b>	12 Sep 2023	04 May 2023
Machine Age	hrs	Client Info		<b>1931</b>	12378	12264
Oil Age	hrs	Client Info		<b>600</b>	600	600
Filter Age	hrs	Client Info		<b>600</b>	600	600
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	<b>8</b>	11	14
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	3	<1
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.0</b>	5.5	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.9</b>	17.7	21.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>12</b>	6	4
Boron	ppm	ASTM D5185m	0	<b>2</b>	4	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>64</b>	60	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1017</b>	1021	899
Calcium	ppm	ASTM D5185m	1070	<b>1103</b>	1169	1052
Phosphorus	ppm	ASTM D5185m	1150	<b>1043</b>	1055	1007
Zinc	ppm	ASTM D5185m	1270	<b>1306</b>	1317	1231
Sulfur	ppm	ASTM D5185m	2060	<b>3208</b>	3833	2981
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	13.1	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.0</b>	8.5	6.3
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	13.7	13.0

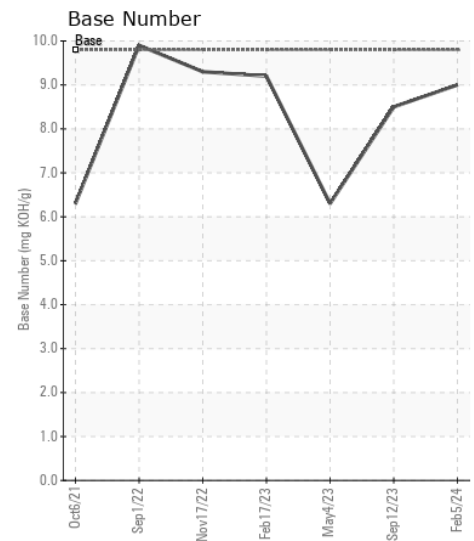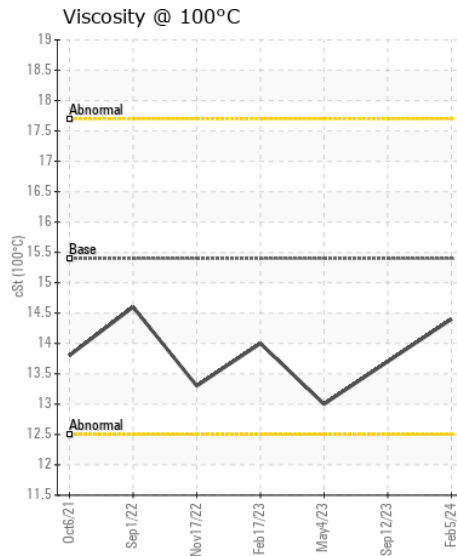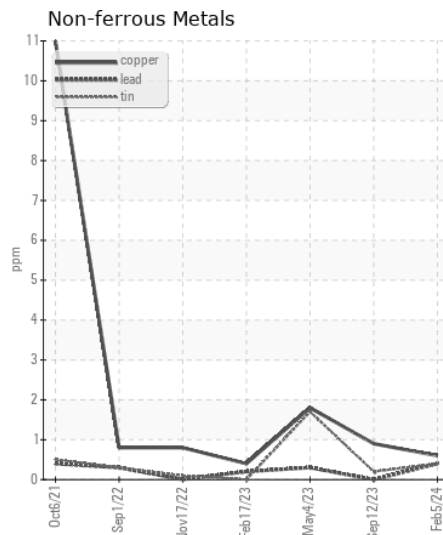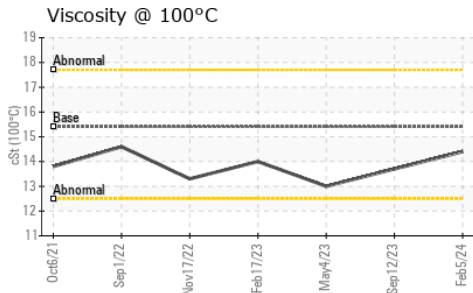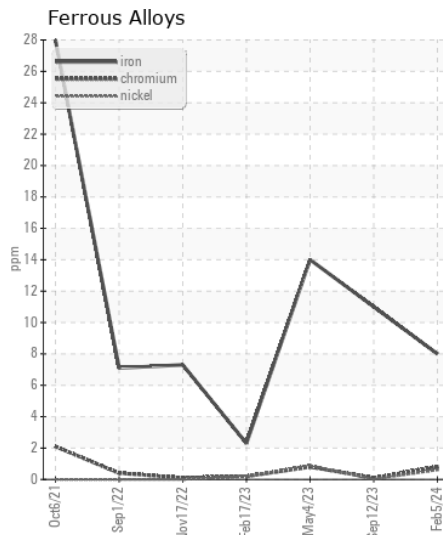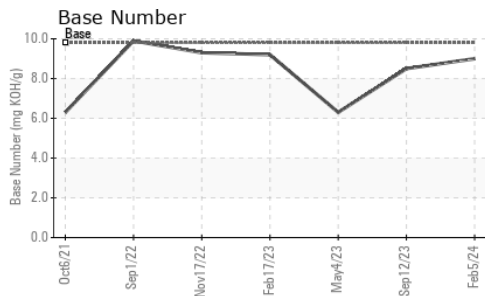

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107705  
**Lab Number** : 06085291  
**Unique Number** : 10872736  
**Test Package** : FLEET

**Received** : 09 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 12 Feb 2024 - Wes Davis

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340

Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: