



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH Guardian 496655
 Component
Diesel Engine
 Fluid
CITGO CITGUARD 600 15W40 (48 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004163	---	---
Sample Date		Client Info		05 Feb 2024	---	---
Machine Age	mls	Client Info		183201	---	---
Oil Age	mls	Client Info		6062	---	---
Filter Age	mls	Client Info		6062	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	12	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	1	---	---
Lead	ppm	ASTM D5185m	>150	0	---	---
Copper	ppm	ASTM D5185m	>90	<1	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	7	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>7.5	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m	13	0	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	57	64	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	825	418	---	---
Calcium	ppm	ASTM D5185m	1100	1901	---	---
Phosphorus	ppm	ASTM D5185m	933	1098	---	---
Zinc	ppm	ASTM D5185m	1089	1401	---	---
Sulfur	ppm	ASTM D5185m	2769	3538	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	8.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	---	---

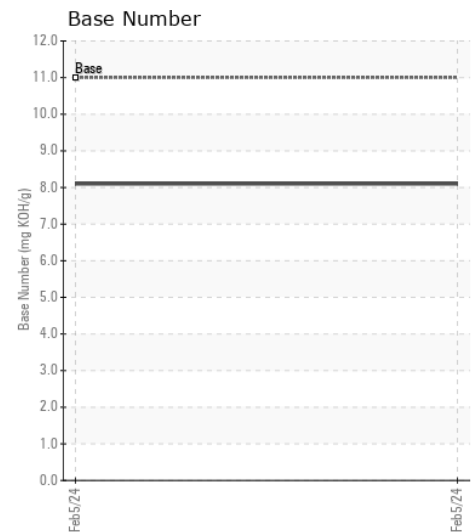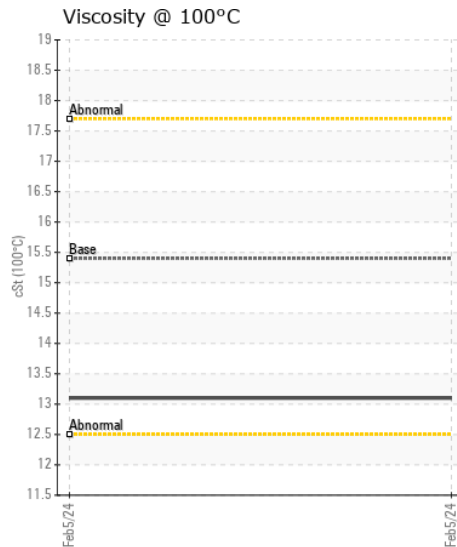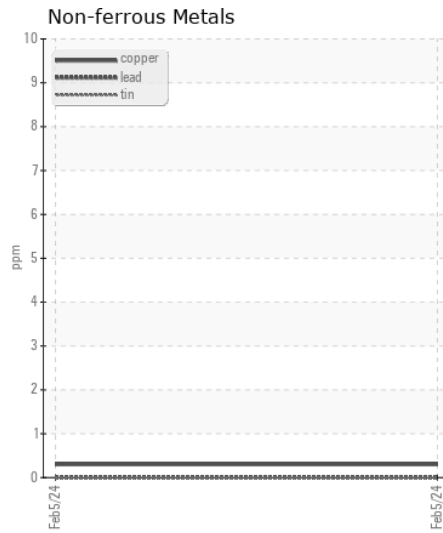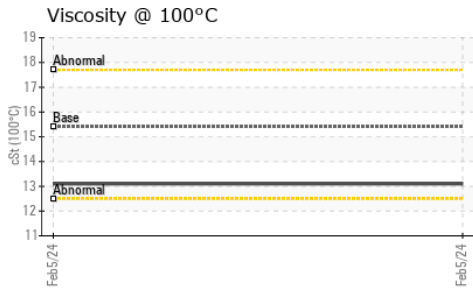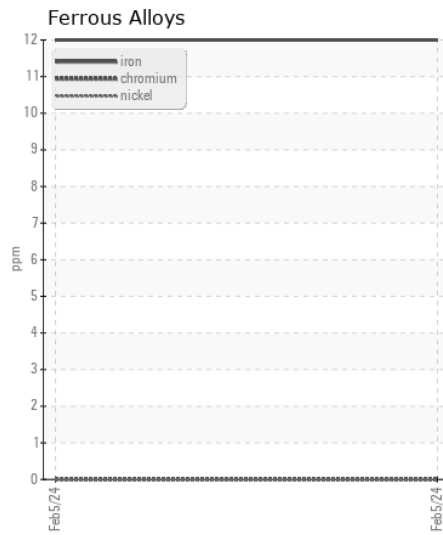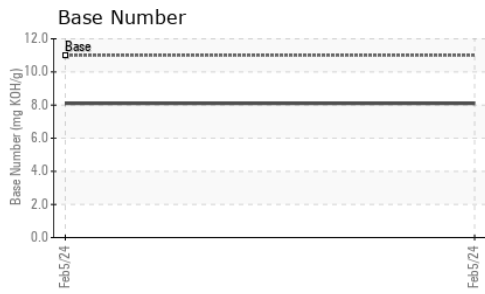

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0004163
Lab Number : 06085634
Unique Number : 10873079
Test Package : FLEET

Received : 12 Feb 2024
Tested : 12 Feb 2024
Diagnosed : 12 Feb 2024 - Wes Davis

RTL PACLEASE - 7025 - Tampa
 8109 East Adamo Drive
 Tampa, FL
 US 33619

Contact: Michael Reid
 REIDM@RushEnterprises.com

T: (813)371-2130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: