



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**944018**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>GFL0107004</b>  | GFL0094247  | GFL0085403  |
| Sample Date    |     | Client Info |           | <b>07 Feb 2024</b> | 02 Nov 2023 | 21 Jul 2023 |
| Machine Age    | hrs | Client Info |           | <b>26191</b>       | 259         | 13995       |
| Oil Age        | hrs | Client Info |           | <b>26191</b>       | 0           | 13995       |
| Filter Age     | hrs | Client Info |           | <b>26191</b>       | 0           | 13995       |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | N/A         | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | N/A         | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >50  | <b>20</b>    | 9    | 6    |
| Chromium     | ppm    | ASTM D5185m | >4   | <b>0</b>     | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>0</b>     | <1   | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>0</b>     | <1   | <1   |
| Silver       | ppm    | ASTM D5185m | >3   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >9   | <b>&lt;1</b> | 2    | <1   |
| Lead         | ppm    | ASTM D5185m | >30  | <b>0</b>     | <1   | 0    |
| Copper       | ppm    | ASTM D5185m | >35  | <b>0</b>     | <1   | <1   |
| Tin          | ppm    | ASTM D5185m | >4   | <b>0</b>     | <1   | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**







There is no indication of any contamination in the oil.

|                  |          |             |       |              |       |       |
|------------------|----------|-------------|-------|--------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >+100 | <b>2</b>     | 4     | 3     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>6</b>     | 3     | <1    |
| Water            |          | WC Method   | >0.1  | <b>NEG</b>   | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 |       | <b>1.4</b>   | 0     | 0.1   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>9.1</b>   | 9.0   | 8.3   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>18.9</b>  | 20.3  | 19.5  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.1  | <b>NEG</b>   | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>15</b>    | 3    | 6    |
| Boron            | ppm      | ASTM D5185m | 50   | <b>&lt;1</b> | 17   | 23   |
| Barium           | ppm      | ASTM D5185m | 5    | <b>0</b>     | 5    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 50   | <b>56</b>    | 52   | 51   |
| Manganese        | ppm      | ASTM D5185m | 0    | <b>0</b>     | <1   | <1   |
| Magnesium        | ppm      | ASTM D5185m | 560  | <b>889</b>   | 552  | 592  |
| Calcium          | ppm      | ASTM D5185m | 1510 | <b>1074</b>  | 1477 | 1600 |
| Phosphorus       | ppm      | ASTM D5185m | 780  | <b>1007</b>  | 757  | 751  |
| Zinc             | ppm      | ASTM D5185m | 870  | <b>1200</b>  | 912  | 937  |
| Sulfur           | ppm      | ASTM D5185m | 2040 | <b>2963</b>  | 2270 | 2770 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>14.7</b>  | 17.1 | 16.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 10.2 | <b>5.0</b>   | 6.3  | 7.3  |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.1 | <b>12.7</b>  | 14.7 | 14.7 |

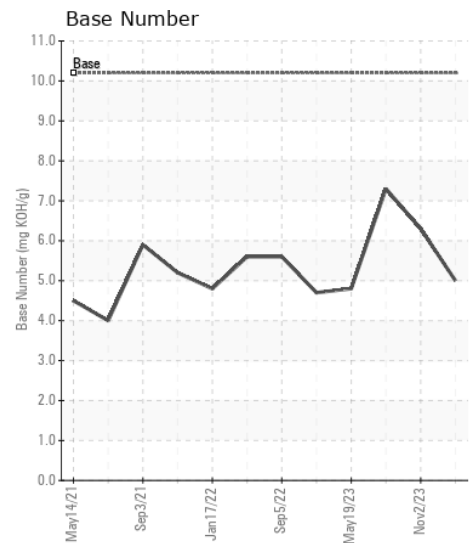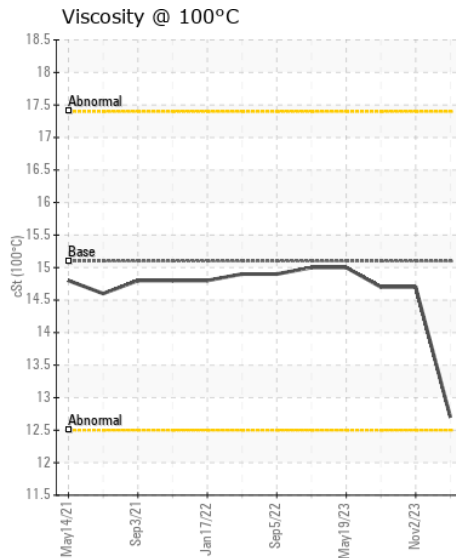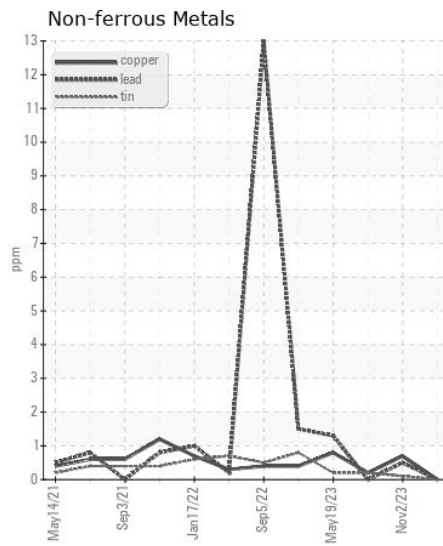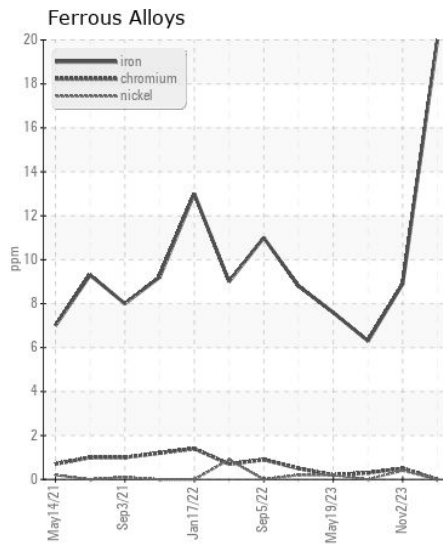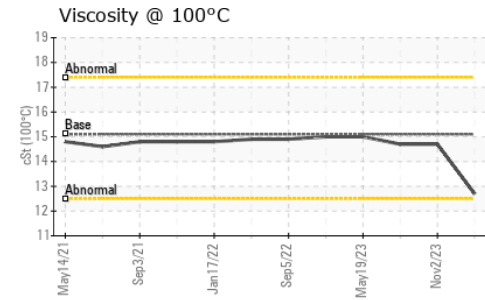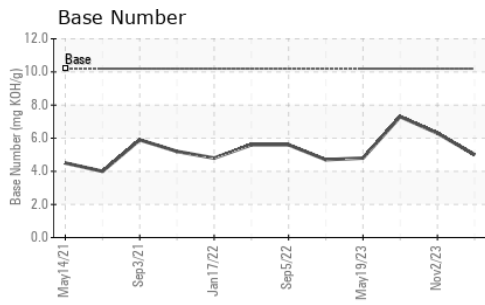

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107004  
**Lab Number** : 06085652  
**Unique Number** : 10873097  
**Test Package** : FLEET

**Received** : 12 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 13 Feb 2024 - Angela Borella

**GFL Environmental - 882 - Gainesville**  
 5002 SW 41st Blvd  
 Gainesville, FL  
 US 32608  
 Contact: ROBERT CLARK  
 robert.clark@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: