



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[JUDY EXCAVATING]
 Machine Id
JOHN DEERE 350G PM061071 (S/N 1FF350GXHJF812999)
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (28 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195546	JR0169235	JR0151855
Sample Date		Client Info		09 Feb 2024	02 May 2023	16 Dec 2022
Machine Age	hrs	Client Info		7946	7013	6537
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	▲ 91	▲ 66	34
Chromium	ppm	ASTM D5185m	>11	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	6	4	3
Lead	ppm	ASTM D5185m	>26	3	0	1
Copper	ppm	ASTM D5185m	>26	8	3	4
Tin	ppm	ASTM D5185m	>4	1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	12	9	8
Potassium	ppm	ASTM D5185m	>20	5	2	0
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.6	7.9	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.3	19.7	24.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<1	3	2
Boron	ppm	ASTM D5185m		116	215	221
Barium	ppm	ASTM D5185m		15	0	0
Molybdenum	ppm	ASTM D5185m		254	239	260
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		773	840	808
Calcium	ppm	ASTM D5185m		1416	1498	1560
Phosphorus	ppm	ASTM D5185m		874	906	918
Zinc	ppm	ASTM D5185m		1029	1113	1093
Sulfur	ppm	ASTM D5185m		3259	3619	3488
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	14.8	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.9	8.0	9.7
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	12.9	13.2

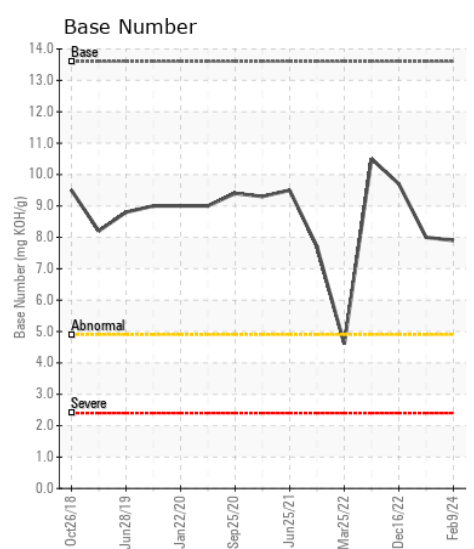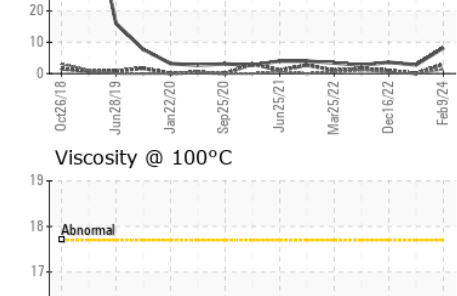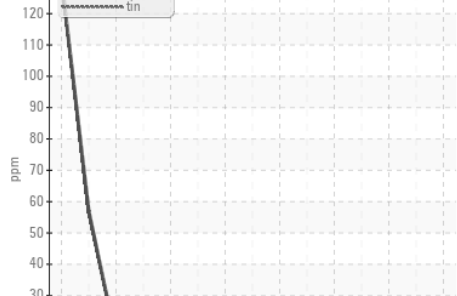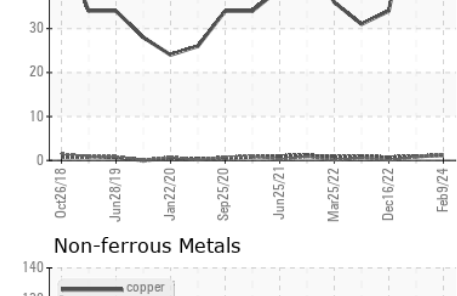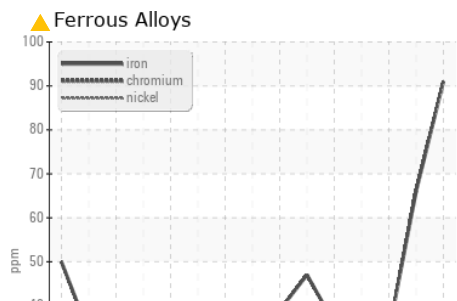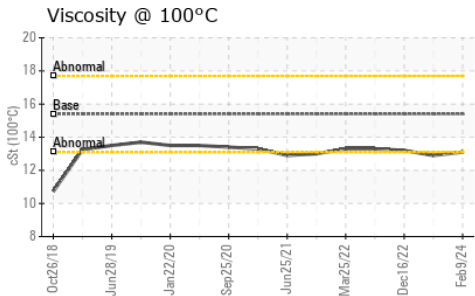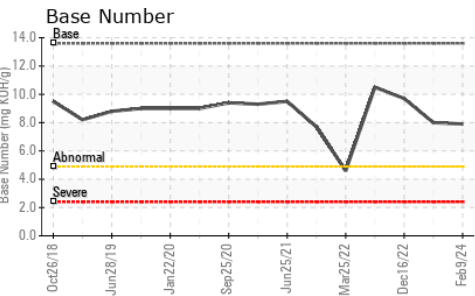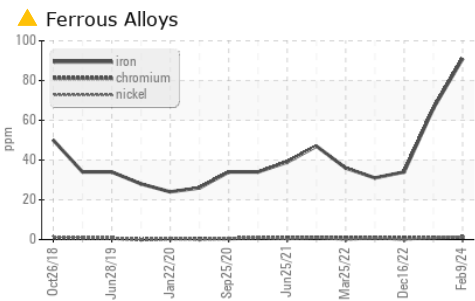

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195546 **Received** : 12 Feb 2024
Lab Number : 06085704 **Tested** : 12 Feb 2024
Unique Number : 10873149 **Diagnosed** : 13 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: TBN)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com
 T: x:
 F: (540)693-2588

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)