



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**GLADYS WHITE**  
Component  
**Starboard Genset**  
Fluid  
**PETRO CANADA DURON MARINE SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>MW0066821</b>   | MW0036039   | MW0036091   |
| Sample Date    |     | Client Info |           | <b>05 Feb 2024</b> | 13 Nov 2023 | 08 May 2023 |
| Machine Age    | hrs | Client Info |           | <b>4303</b>        | 4081        | 3376        |
| Oil Age        | hrs | Client Info |           | <b>222</b>         | 705         | 400         |
| Filter Age     | hrs | Client Info |           | <b>222</b>         | 705         | 400         |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | N/A         |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | N/A         |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >50  | <b>6</b>     | 8    | 8    |
| Chromium     | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | 0    |
| Silver       | ppm    | ASTM D5185m | >5   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >12  | <b>2</b>     | 1    | <1   |
| Lead         | ppm    | ASTM D5185m | >17  | <b>&lt;1</b> | 0    | 0    |
| Copper       | ppm    | ASTM D5185m | >70  | <b>&lt;1</b> | 2    | <1   |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | 0    | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**







There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>3</b>       | 4     | 4     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>1</b>       | 0     | 0     |
| Fuel             |          | WC Method   | >4.0  | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.1  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 |       | <b>0.1</b>     | 0.1   | 0.1   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>4.6</b>     | 7.2   | 5.9   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>14.1</b>    | 16.6  | 14.6  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.1  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>0</b>     | 4    | 2    |
| Boron            | ppm      | ASTM D5185m | 1.0  | <b>2</b>     | 0    | 0    |
| Barium           | ppm      | ASTM D5185m | 1.0  | <b>13</b>    | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 1.0  | <b>2</b>     | 0    | 1    |
| Manganese        | ppm      | ASTM D5185m | 1    | <b>&lt;1</b> | 1    | <1   |
| Magnesium        | ppm      | ASTM D5185m | 15   | <b>881</b>   | 906  | 956  |
| Calcium          | ppm      | ASTM D5185m | 2540 | <b>1049</b>  | 1001 | 1032 |
| Phosphorus       | ppm      | ASTM D5185m | 1000 | <b>1111</b>  | 1067 | 1098 |
| Zinc             | ppm      | ASTM D5185m | 1110 | <b>1277</b>  | 1313 | 1358 |
| Sulfur           | ppm      | ASTM D5185m | 3700 | <b>3564</b>  | 2852 | 3627 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>9.0</b>   | 14.9 | 9.6  |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 7.9  | <b>6.9</b>   | 4.8  | 6.6  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.6 | <b>13.1</b>  | 13.7 | 13.7 |

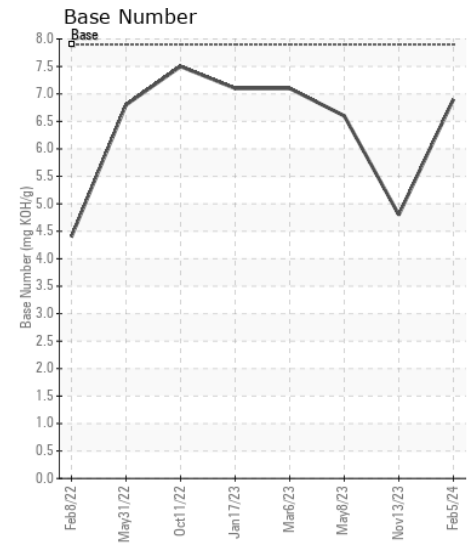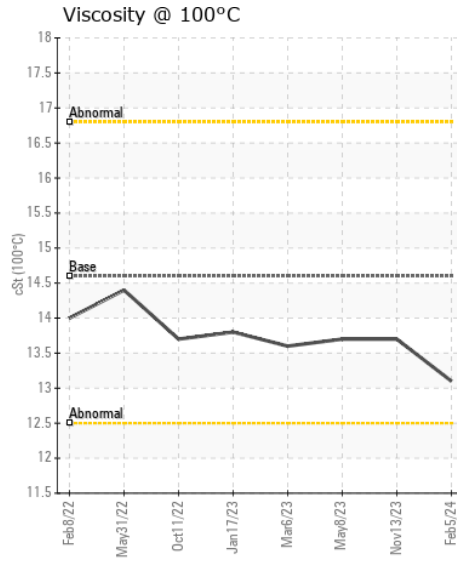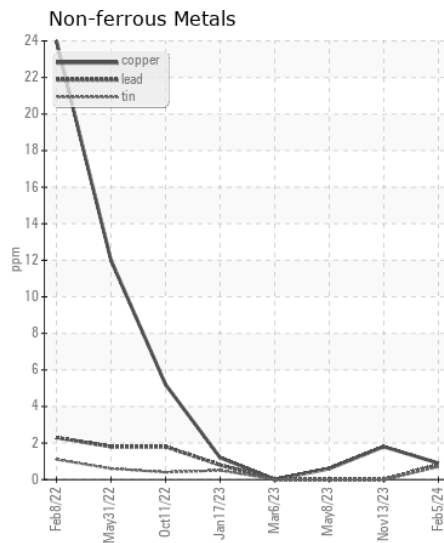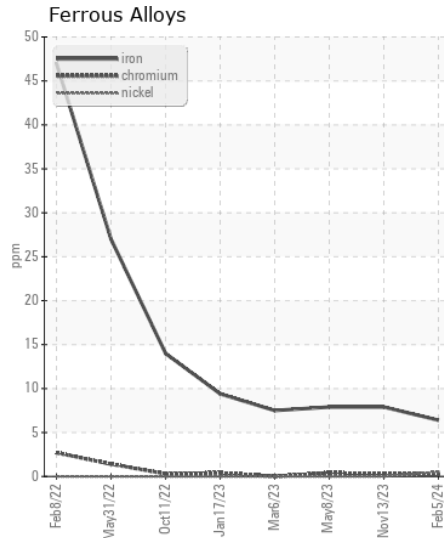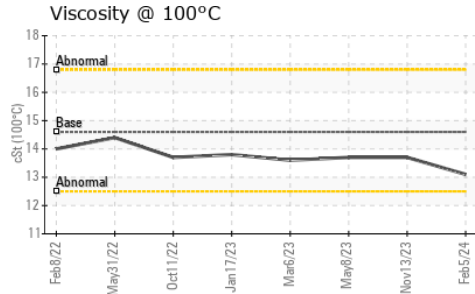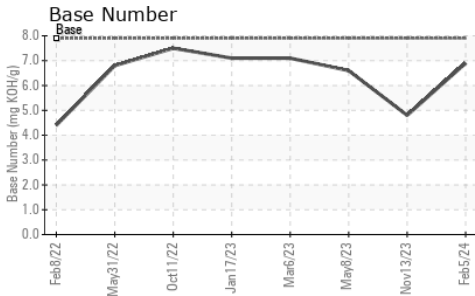

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0066821  
**Lab Number** : 06085744  
**Unique Number** : 10873189  
**Test Package** : MAR 2  
**Received** : 12 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 12 Feb 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION**  
 1495 EAST ILLINOIS RT 71  
 OTTAWA, IL  
 US 61350  
 Contact: Jackson Hayes  
 jackson.hayes@adm.com  
 T:  
 F: (815)434-5571

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)