



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
7804M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110134	GFL0085000	---
Sample Date		Client Info		06 Feb 2024	10 Oct 2023	---
Machine Age	hrs	Client Info		7238	7027	---
Oil Age	hrs	Client Info		211	7027	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Changed	---
Filter Changed		Client Info		Not Chngd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	14	11	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	4	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	<1	<1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	4	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	0.5	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	10.0	8.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	19.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	3	---
Boron	ppm	ASTM D5185m	0	2	0	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	59	57	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	929	904	---
Calcium	ppm	ASTM D5185m	1070	1050	1011	---
Phosphorus	ppm	ASTM D5185m	1150	1054	1035	---
Zinc	ppm	ASTM D5185m	1270	1258	1265	---
Sulfur	ppm	ASTM D5185m	2060	2884	2984	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	16.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.7	8.0	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.9	---

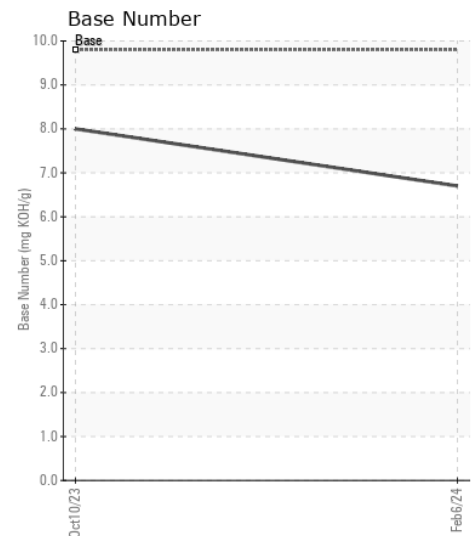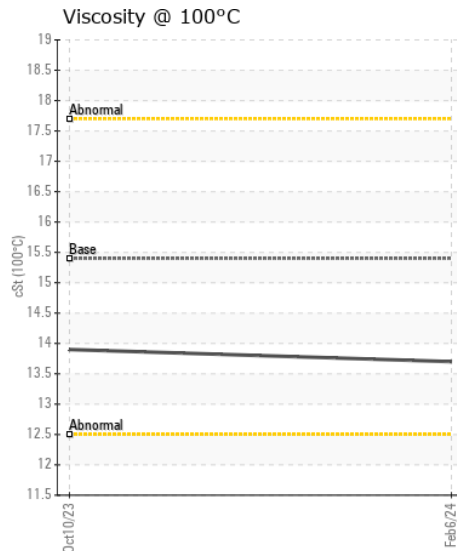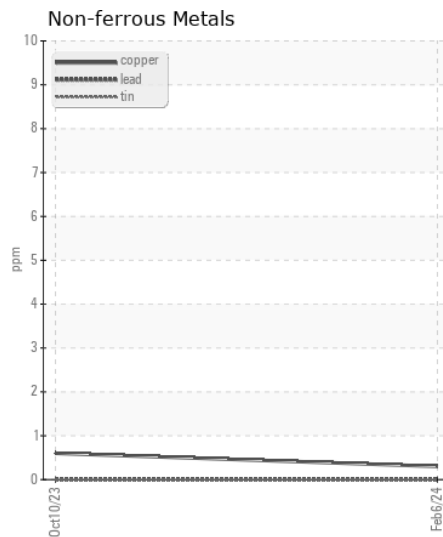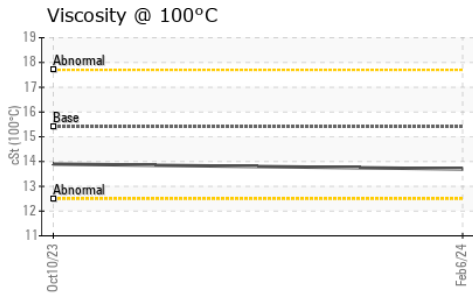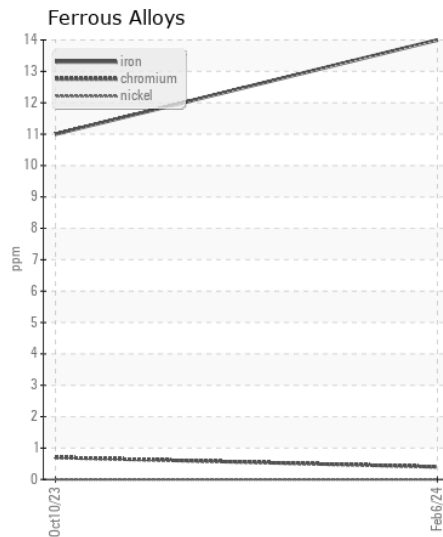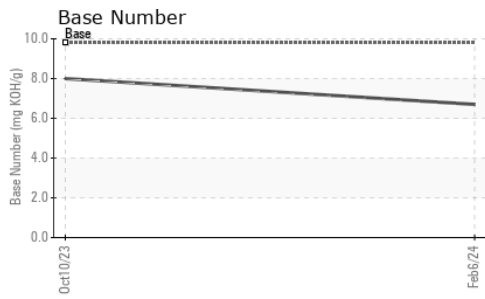

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110134
Lab Number : 06085758
Unique Number : 10873203
Test Package : FLEET

Received : 12 Feb 2024
Tested : 13 Feb 2024
Diagnosed : 13 Feb 2024 - Wes Davis

GFL Environmental - 468 - Dearborn
 3051 Schaefer Rd
 Dearborn, MI
 US 48126
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: