



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Shredder
 Machine Id
In-Feed Conveyor- Shredder
 Component
Hydraulic Power Pack
 Fluid
SHELL HYDRAULIC S1 M 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0000746	PE0000744	PE0000742
Sample Date		Client Info		07 Feb 2024	09 Jan 2024	09 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	1	1	<1
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>20	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	0
Lead	ppm	ASTM D5185m	>20	<1	0	0
Copper	ppm	ASTM D5185m	>20	5	8	3
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	317	3184	1753
Particles >6µm		ASTM D7647	>1300	93	111	494
Particles >14µm		ASTM D7647	>160	10	10	52
Particles >21µm		ASTM D7647	>40	2	2	18
Particles >38µm		ASTM D7647	>10	0	0	2
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/14/10	19/14/10	18/16/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	<1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		13	0	0
Molybdenum	ppm	ASTM D5185m		1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		11	0	2
Calcium	ppm	ASTM D5185m		53	36	46
Phosphorus	ppm	ASTM D5185m		292	291	282
Zinc	ppm	ASTM D5185m		287	342	309
Sulfur	ppm	ASTM D5185m		692	685	649
Acid Number (AN)	mg KOH/g	ASTM D8045		0.22	0.33	0.29
Visc @ 40°C	cSt	ASTM D445	68	63.7	66.4	63.8

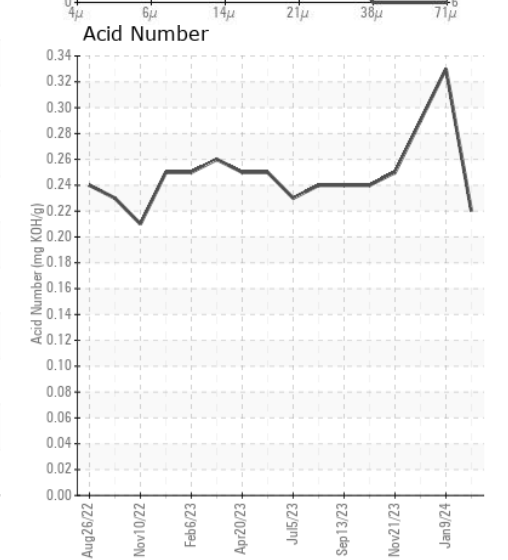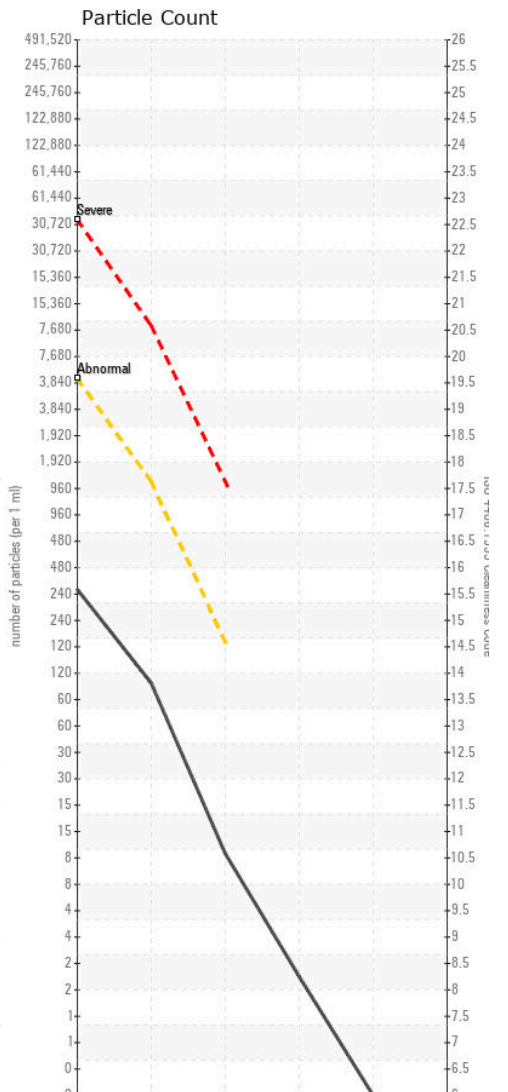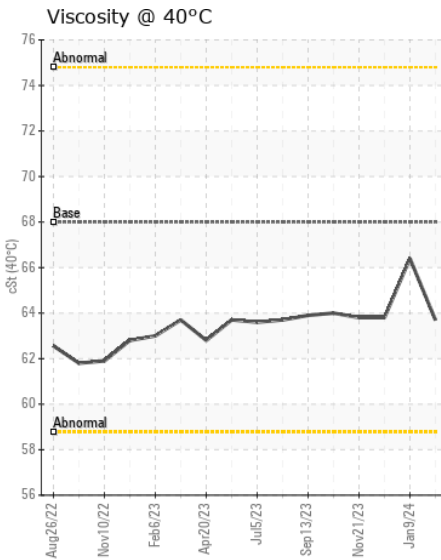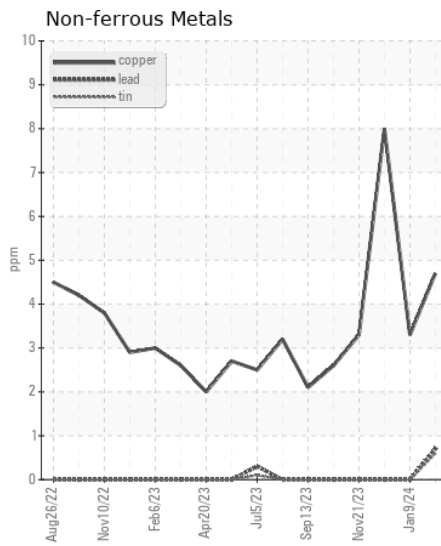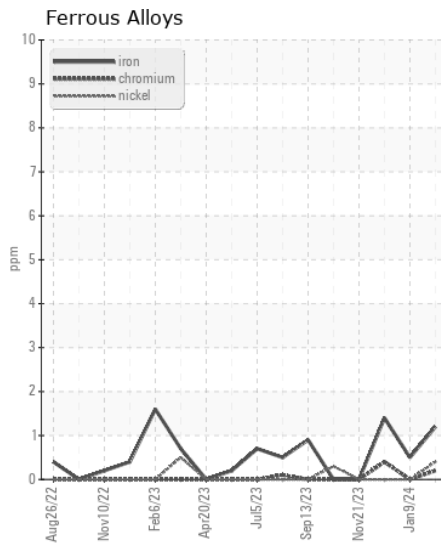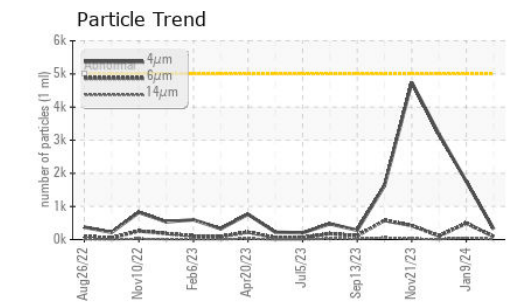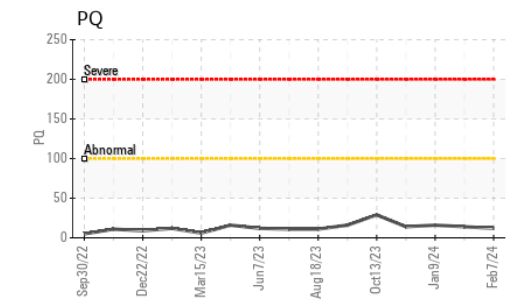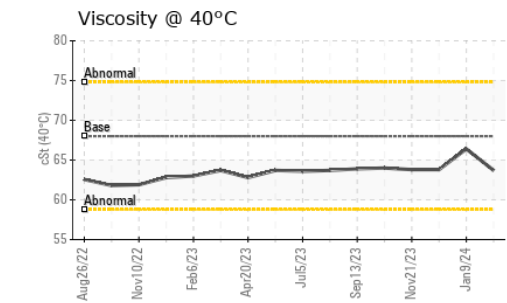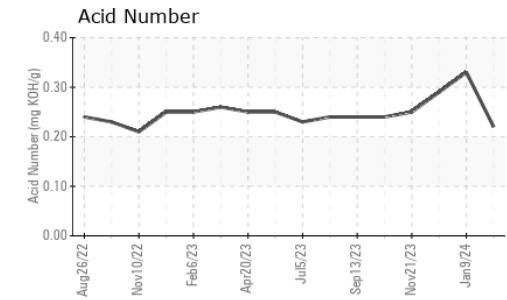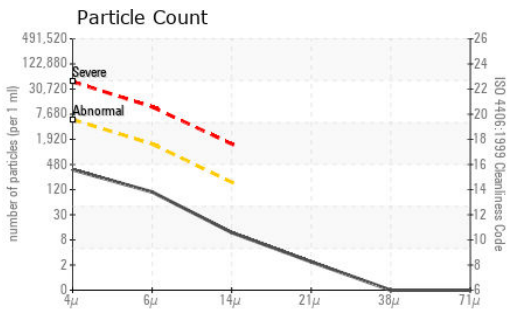

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0000746
Lab Number : 06085963
Unique Number : 10873408
Test Package : PLANT (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN)

Received : 12 Feb 2024
Tested : 13 Feb 2024
Diagnosed : 13 Feb 2024 - Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Seattle Iron and Metals
 601 S MYRTLE ST
 SEATTLE, WA
 US 98108

Contact: ADAM THOMAS
 athomas@seairon.com

T: (206)682-0040

F: