



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ATTENTION</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 768L-II 1DW768LBCMF712062**

Component  
**Hydraulic System**

Fluid  
**JOHN DEERE HYDRAU (131 GAL)**

### RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0161251</b>	JR0110314	---
Sample Date		Client Info		<b>09 Feb 2024</b>	12 Jan 2022	---
Machine Age	hrs	Client Info		<b>4470</b>	502	---
Oil Age	hrs	Client Info		<b>0</b>	502	---
Filter Age	hrs	Client Info		<b>0</b>	502	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>Changed</b>	Not Changd	---
Sample Status				<b>ATTENTION</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>3</b>	<1	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>3</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>2856</b>	1194	---
Particles >6µm		ASTM D7647	>1300	<b>1004</b>	68	---
Particles >14µm		ASTM D7647	>160	<b>▲ 162</b>	10	---
Particles >21µm		ASTM D7647	>40	<b>▲ 63</b>	3	---
Particles >38µm		ASTM D7647	>10	<b>9</b>	2	---
Particles >71µm		ASTM D7647	>3	<b>2</b>	1	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 19/17/15</b>	17/13/10	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>13</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	3	---
Calcium	ppm	ASTM D5185m	87	<b>99</b>	111	---
Phosphorus	ppm	ASTM D5185m	727	<b>605</b>	588	---
Zinc	ppm	ASTM D5185m	900	<b>718</b>	804	---
Sulfur	ppm	ASTM D5185m	1500	<b>1830</b>	1595	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.66</b>	0.703	---
Visc @ 40°C	cSt	ASTM D445	65	<b>59.6</b>	58.9	---

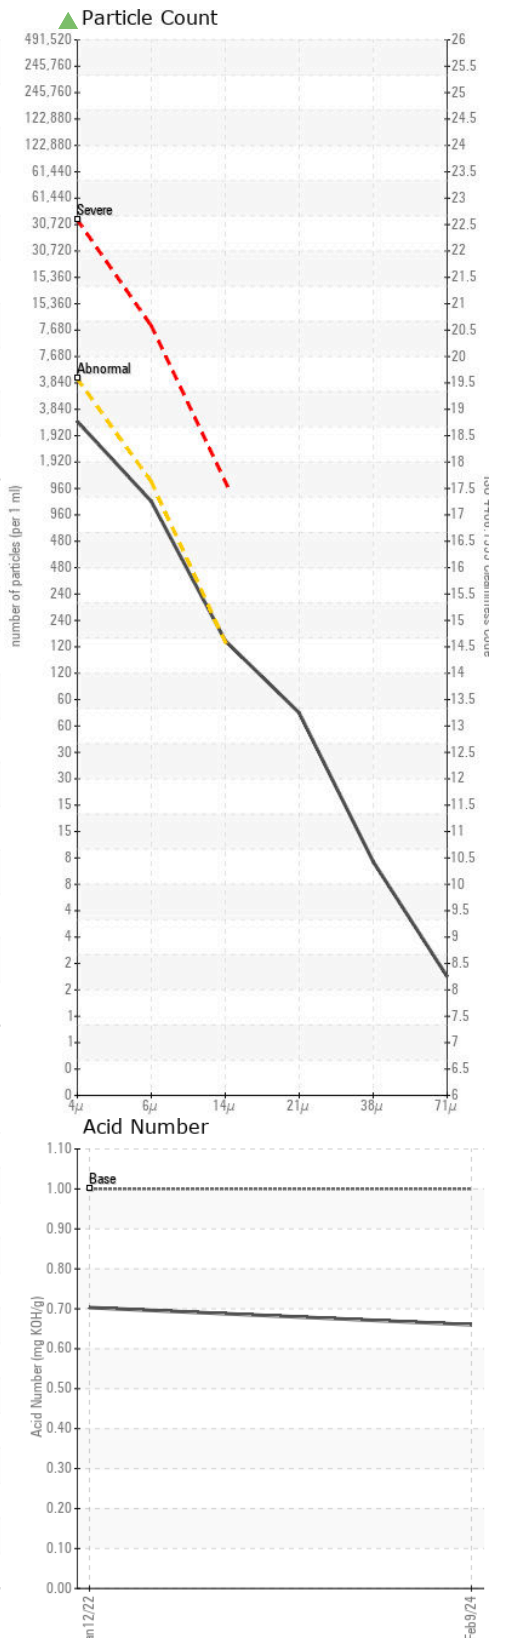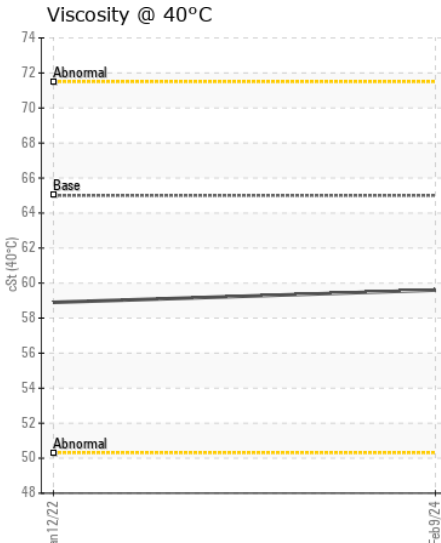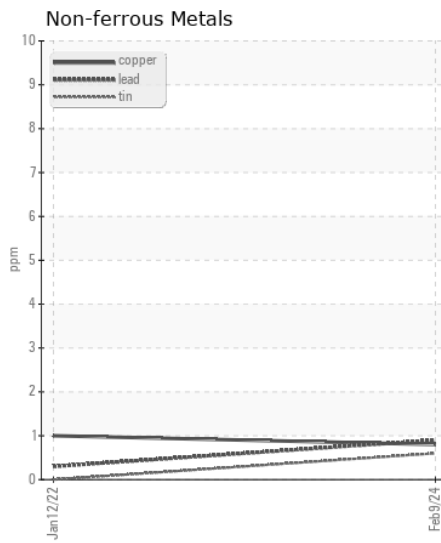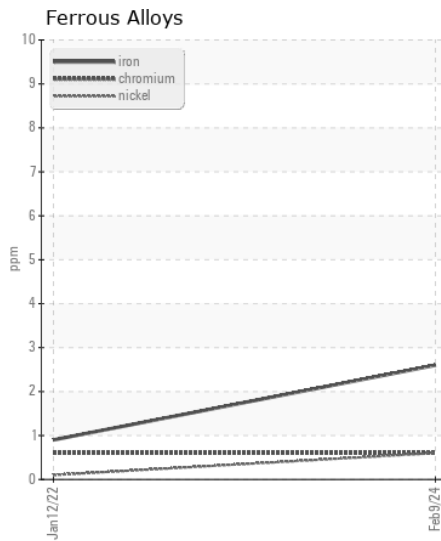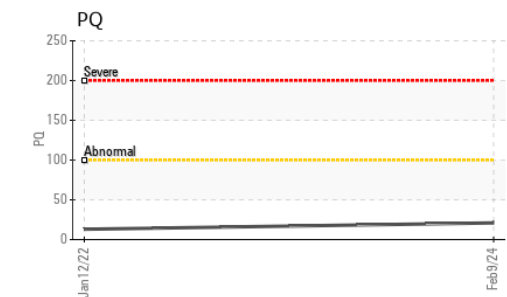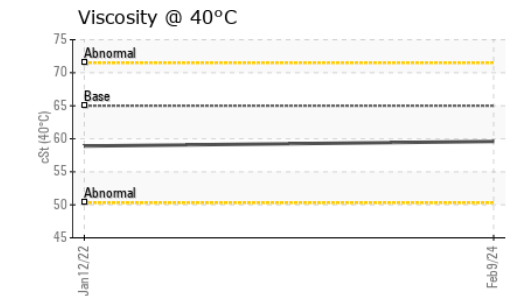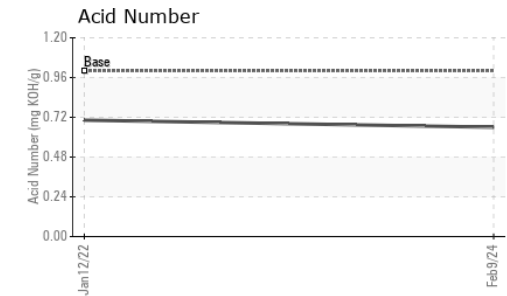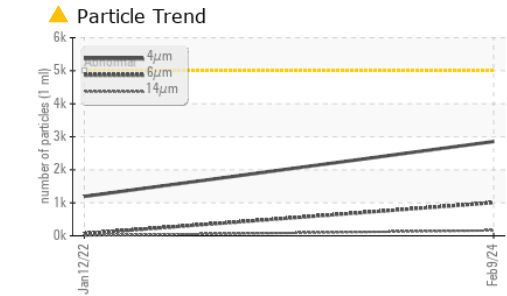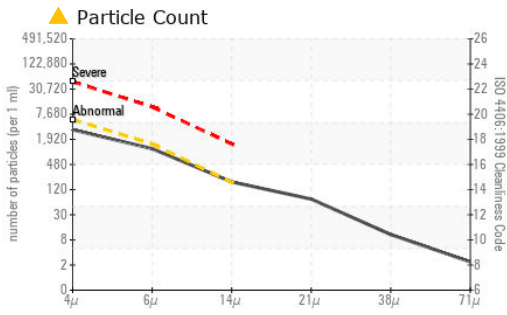

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0161251 **Received** : 12 Feb 2024  
**Lab Number** : 06085968 **Tested** : 13 Feb 2024  
**Unique Number** : 10873413 **Diagnosed** : 13 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MOUNT GILEAD**  
 305 NORTH MAIN STREET  
 MOUNT GILEAD, NC  
 US 27306  
 Contact: ADAM CRUMP  
 adam.crump@jamesriverequipment.com  
 T:  
 F: (910)439-4568

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)