



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[JUDY EXCAVATING]
 Machine Id
JOHN DEERE 350G PM061071 (S/N 1FF350GXHJF812999)
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (51 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195544	JR0169227	JR0151830
Sample Date		Client Info		09 Feb 2024	02 May 2023	16 Dec 2022
Machine Age	hrs	Client Info		7946	7013	6537
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	13	11	5
Iron	ppm	ASTM D5185m	>32	7	7	4
Chromium	ppm	ASTM D5185m	>9	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	0	<1
Lead	ppm	ASTM D5185m	>28	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>11	3	3	3
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	49483	69401	21171
Particles >6µm		ASTM D7647	>20000	1930	3048	428
Particles >14µm		ASTM D7647	>640	23	4	11
Particles >21µm		ASTM D7647	>160	6	1	3
Particles >38µm		ASTM D7647	>40	0	0	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	23/18/12	23/19/9	22/16/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	0	0
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		13	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		9	2	6
Phosphorus	ppm	ASTM D5185m	827	478	486	469
Zinc	ppm	ASTM D5185m	0	0	7	4
Sulfur	ppm	ASTM D5185m	13	4	70	51
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.17	0.22	0.22
Visc @ 40°C	cSt	ASTM D445	47	45.2	46.5	46.0

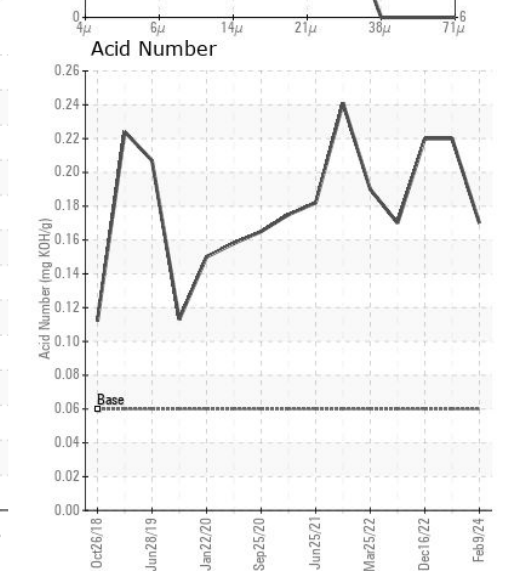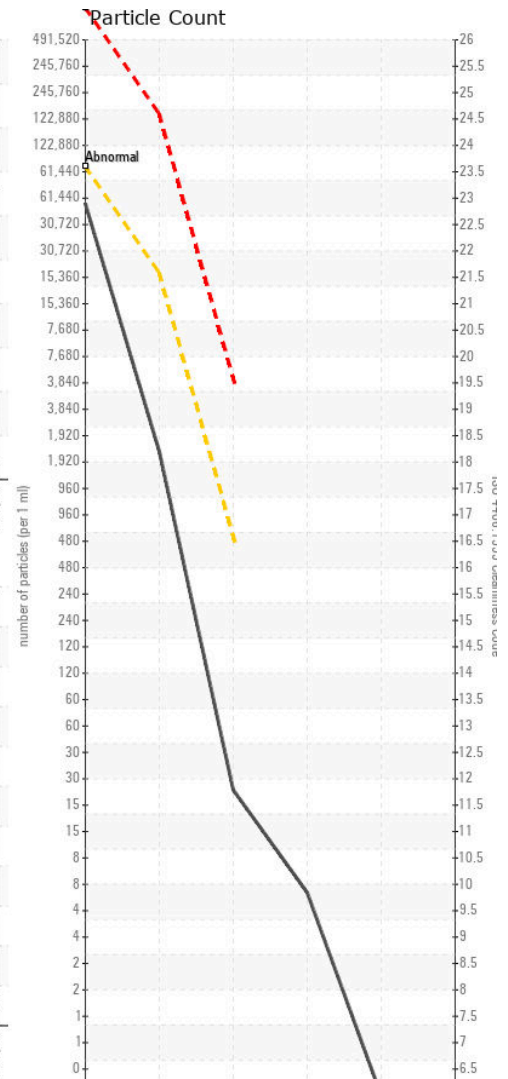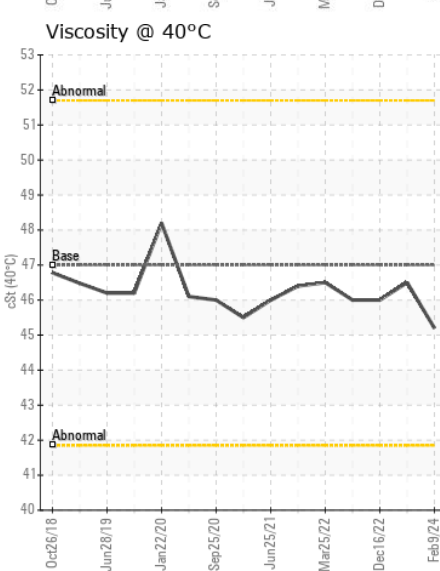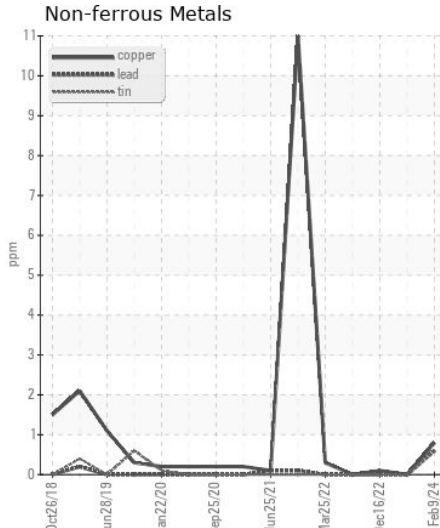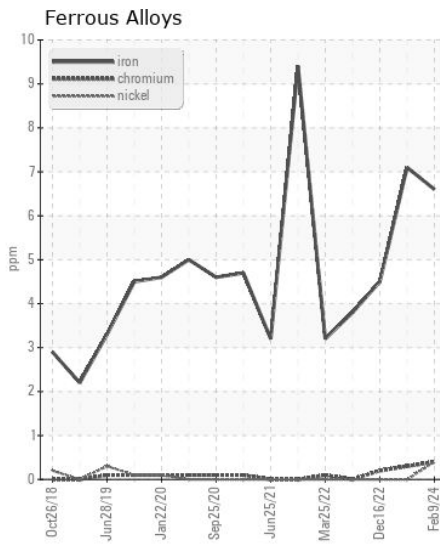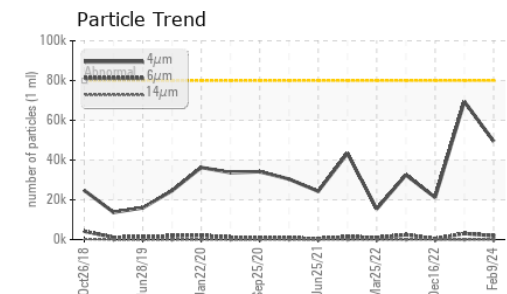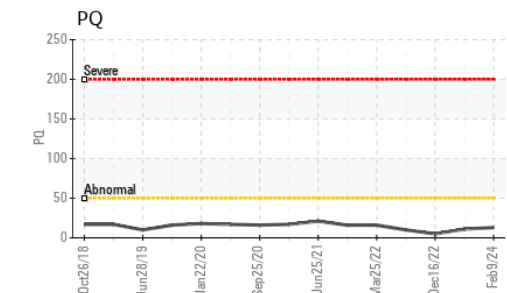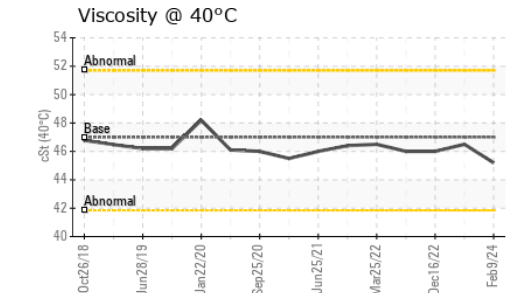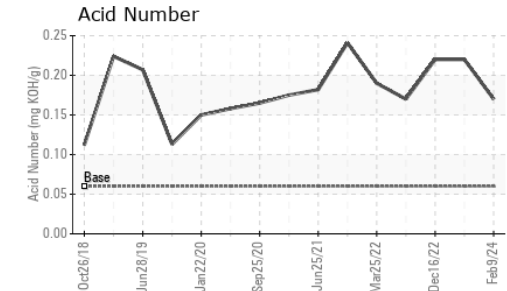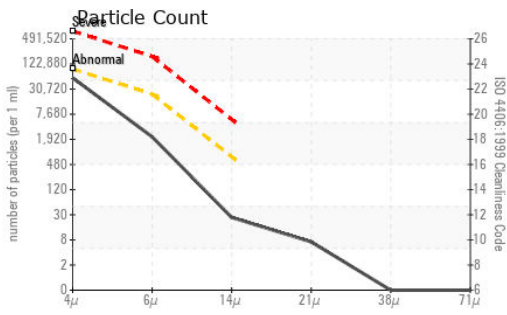

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195544 **Received** : 12 Feb 2024
Lab Number : 06085975 **Tested** : 13 Feb 2024
Unique Number : 10873420 **Diagnosed** : 13 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com
 T: x:
 F: (540)693-2588

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)