



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
POC-LEFT BOOM LIFT - MCELROY

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10001947	---	---
Sample Date		Client Info		08 Feb 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>20	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>20	2	---	---
Copper	ppm	ASTM D5185m	>20	4	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>15	2	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water	%	ASTM D6304	>0.05	0.005	---	---
ppm Water	ppm	ASTM D6304	>500	55	---	---
Particles >4µm		ASTM D7647	>5000	▲ 25771	---	---
Particles >6µm		ASTM D7647	>1300	▲ 6137	---	---
Particles >14µm		ASTM D7647	>160	▲ 349	---	---
Particles >21µm		ASTM D7647	>40	▲ 78	---	---
Particles >38µm		ASTM D7647	>10	3	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 22/20/16	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	14	---	---
Molybdenum	ppm	ASTM D5185m	5	1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	15	---	---
Calcium	ppm	ASTM D5185m	200	162	---	---
Phosphorus	ppm	ASTM D5185m	300	315	---	---
Zinc	ppm	ASTM D5185m	370	332	---	---
Sulfur	ppm	ASTM D5185m	2500	1877	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.32	---	---
Visc @ 40°C	cSt	ASTM D445	46	43.8	---	---
Visc @ 100°C	cSt	ASTM D445	6.7	7.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270	97	149	---	---

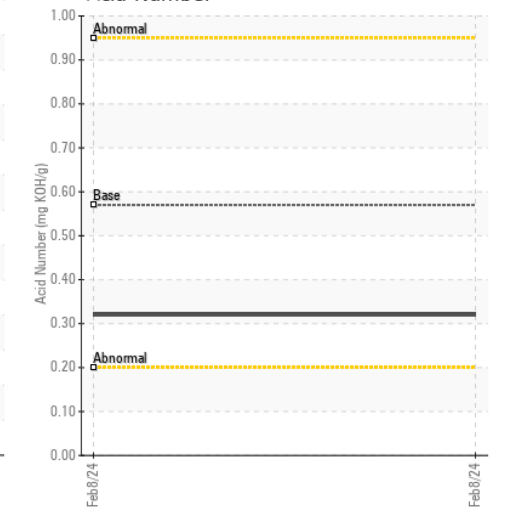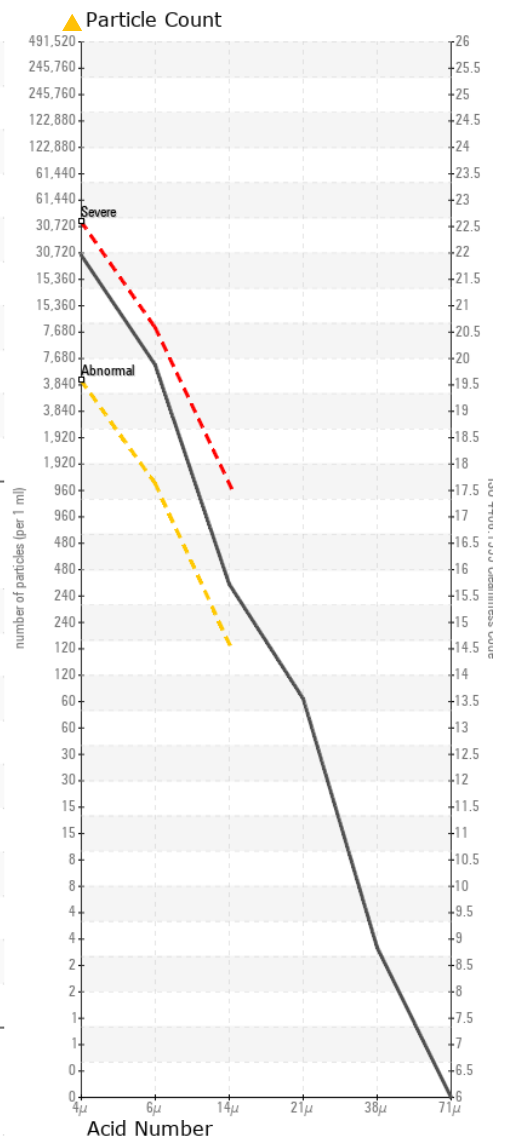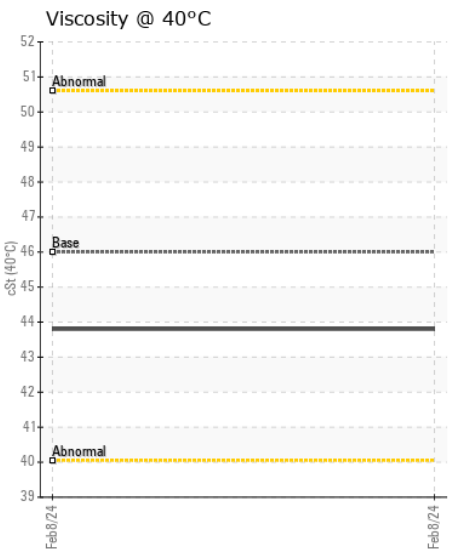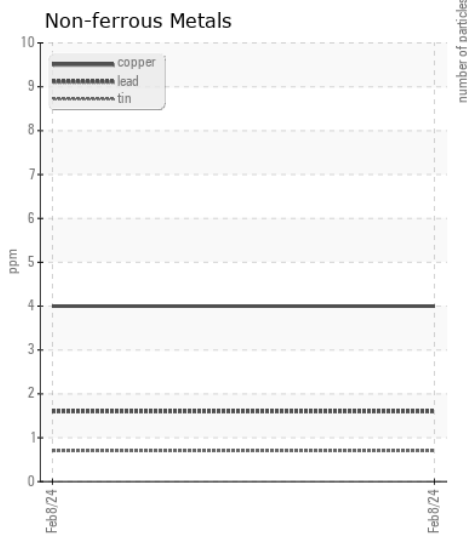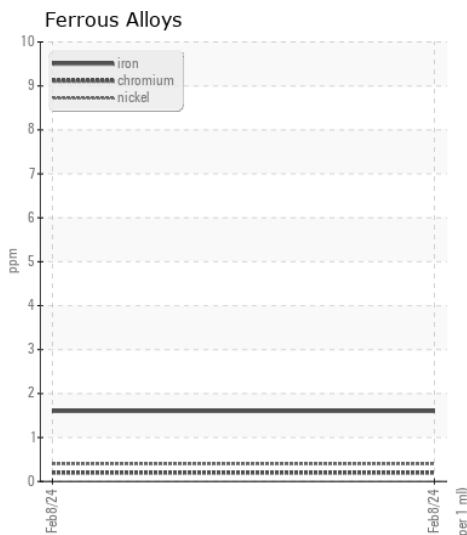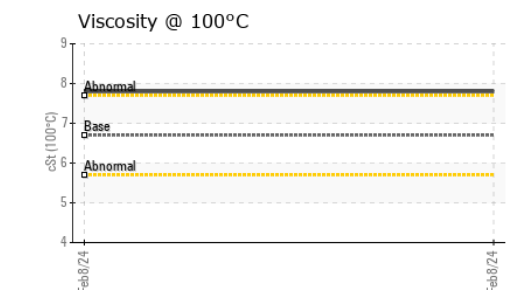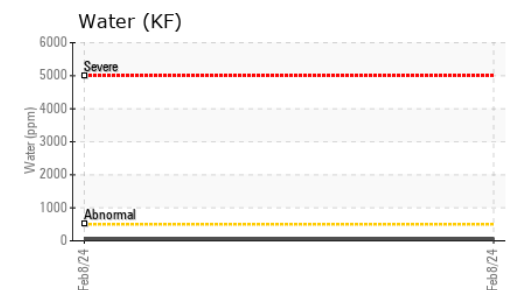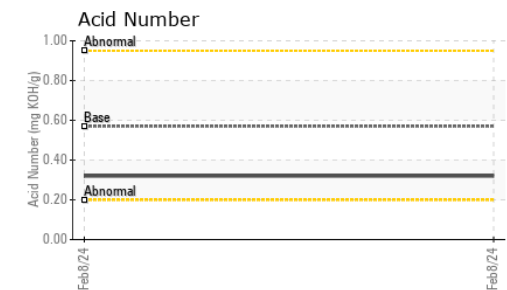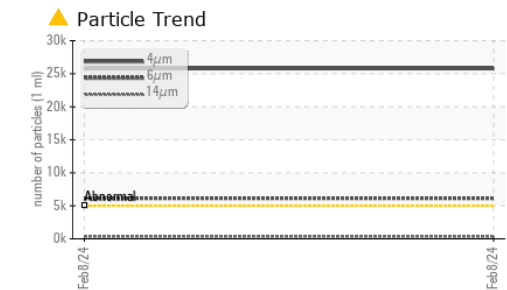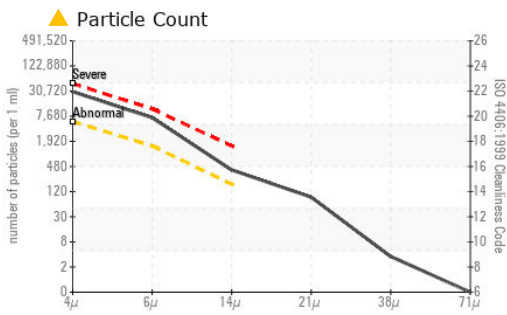

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10001947
Lab Number : 06086040
Unique Number : 10873485
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

TULCO OILS INC (001-TULSA DIVISION)
 5240 EAST PINE
 TULSA, OK
 US 74115
 Contact: DYLAN COPE
 dylancope@tulco.com
 T: (800)375-2347
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)