



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 768L-II 1DW768LBCMF712062

Component
Bogie/Center Left Tandem

Fluid
JOHN DEERE GL-5 80W90 (16 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0161250	JR0110317	---
Sample Date		Client Info		09 Feb 2024	12 Jan 2022	---
Machine Age	hrs	Client Info		4470	502	---
Oil Age	hrs	Client Info		0	502	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		16	30	---
Iron	ppm	ASTM D5185m	>250	2	19	---
Chromium	ppm	ASTM D5185m	>11	0	1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	0	1	---
Lead	ppm	ASTM D5185m	>11	0	0	---
Copper	ppm	ASTM D5185m	>25	0	<1	---
Tin	ppm	ASTM D5185m		0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	2	5	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>21	0	2	---
Boron	ppm	ASTM D5185m		0	500	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		0	1	---
Magnesium	ppm	ASTM D5185m		3	780	---
Calcium	ppm	ASTM D5185m		8	71	---
Phosphorus	ppm	ASTM D5185m		318	1285	---
Zinc	ppm	ASTM D5185m		0	18	---
Sulfur	ppm	ASTM D5185m		18710	23105	---
Visc @ 40°C	cSt	ASTM D445		141	151	---

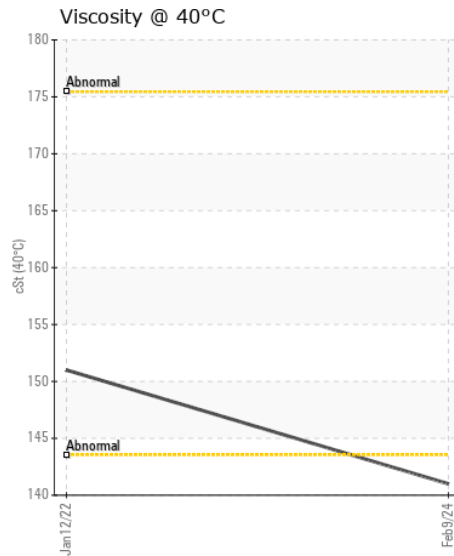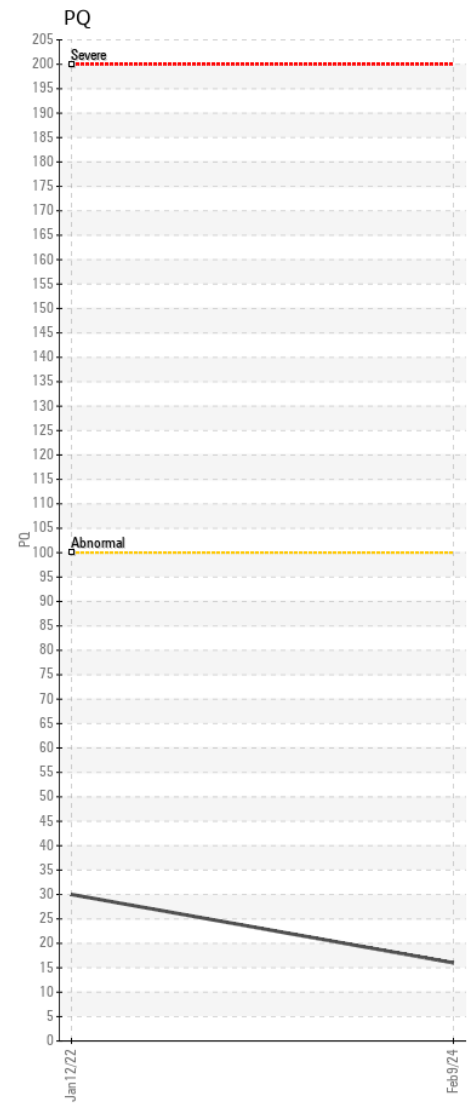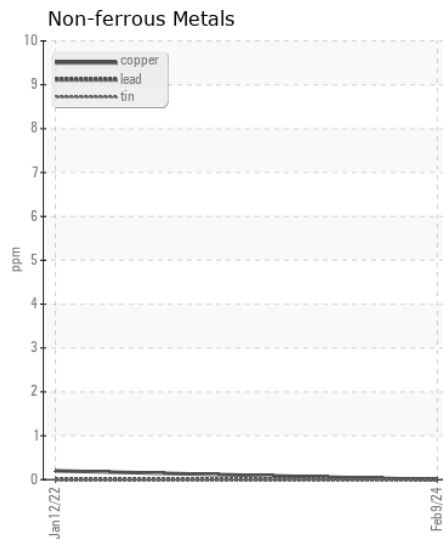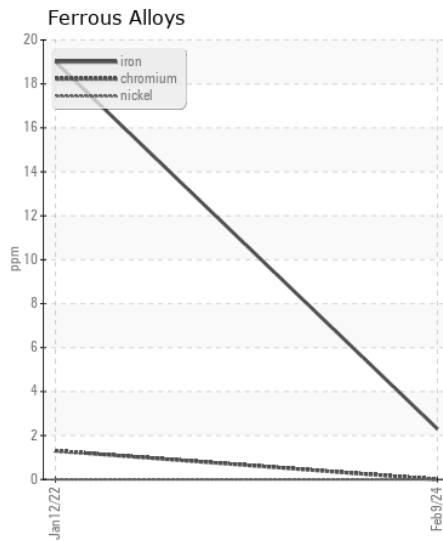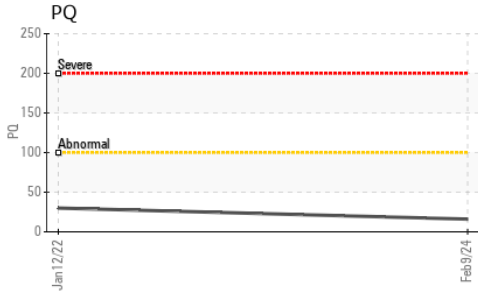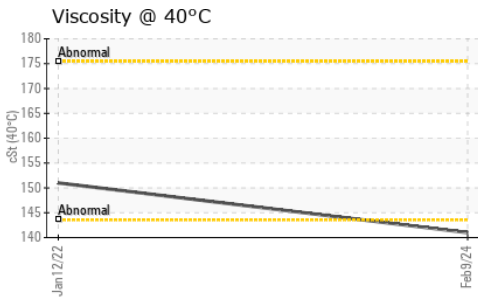

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0161250 **Received** : 12 Feb 2024
Lab Number : 06086253 **Tested** : 13 Feb 2024
Unique Number : 10873698 **Diagnosed** : 13 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - MOUNT GILEAD
 305 NORTH MAIN STREET
 MOUNT GILEAD, NC
 US 27306

Contact: TIM ELSWORTH
 telsworth@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)439-5653
 F: (910)439-4568