



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[12046]
Machine Id
VOLVO A35D 72314
Component
Bogie/Center Axle
Fluid
MOBIL MOBILUBE HD PLUS 85W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443174	VCP376506	VCP310397
Sample Date		Client Info		06 Feb 2024	30 Sep 2022	29 Jul 2021
Machine Age	hrs	Client Info		11246	10575	9836
Oil Age	hrs	Client Info		0	2000	1500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Not Chngd
Filter Changed		Client Info		N/A	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1250	29	67	62
Chromium	ppm	ASTM D5185m	>15	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>45	0	<1	<1
Lead	ppm	ASTM D5185m	>5	0	0	<1
Copper	ppm	ASTM D5185m	>215	<1	5	4
Tin	ppm	ASTM D5185m	>55	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>217	6	6	6
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	2
Boron	ppm	ASTM D5185m		68	155	244
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	6	6
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		11	40	42
Calcium	ppm	ASTM D5185m		148	238	238
Phosphorus	ppm	ASTM D5185m		530	930	939
Zinc	ppm	ASTM D5185m		73	133	129
Sulfur	ppm	ASTM D5185m		19985	28766	21835
Visc @ 40°C	cSt	ASTM D445	461	305	251	252

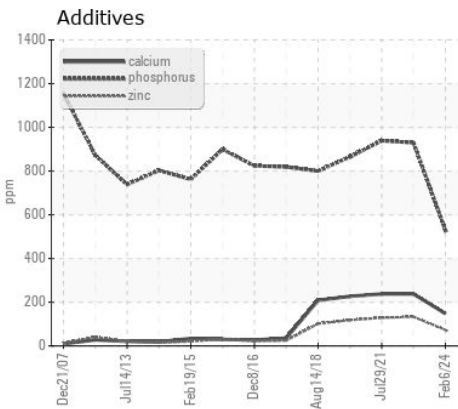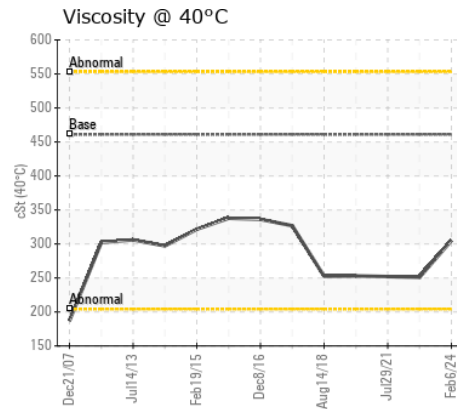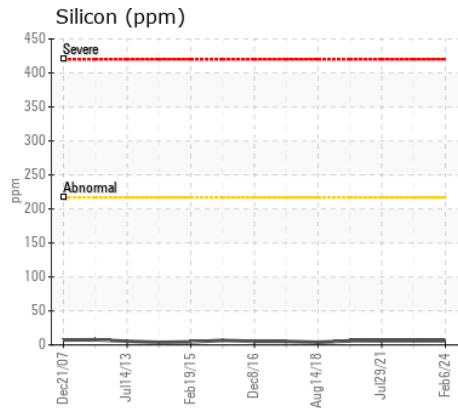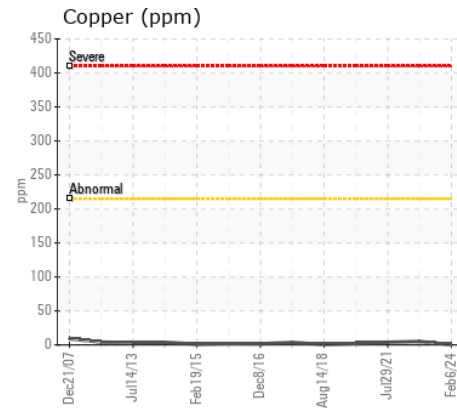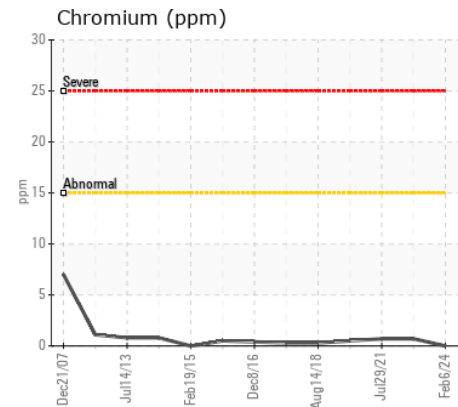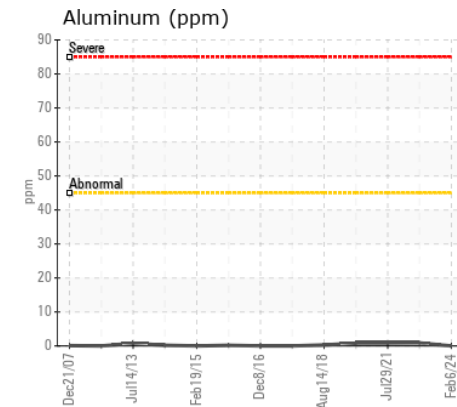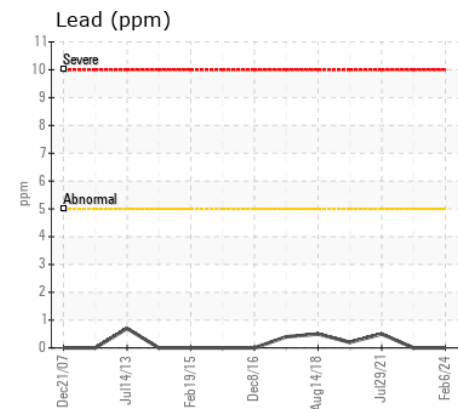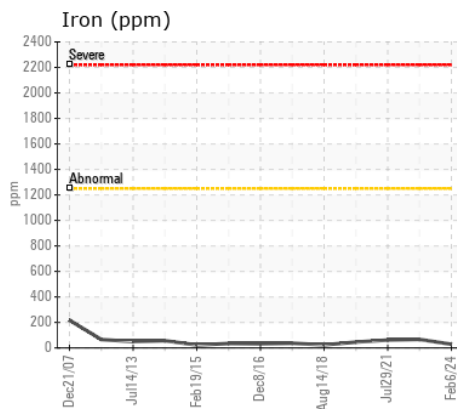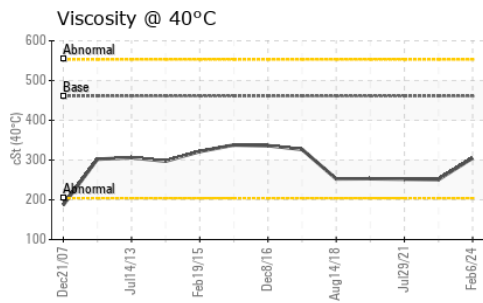

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP443174 **Received** : 12 Feb 2024
Lab Number : 06086295 **Tested** : 13 Feb 2024
Unique Number : 10873740 **Diagnosed** : 13 Feb 2024 - Sean Felton
Test Package : MOB 1

JAMES J ANDERSON
 6958 TORRESDALE AVENUE
 PHILADELPHIA, PA
 US 19135
 Contact: JOHN HERBUT
 herb@jjaconstruction.com
 T: (215)850-9051
 F: (215)427-0208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)