



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L586 065499-1761
Component
Splitter Box
Fluid
LIEBHERR GEAR BASIC 90 LS (2 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0268334	LH0258504	LH0244433
Sample Date		Client Info		07 Feb 2024	24 Aug 2023	24 Mar 2023
Machine Age	hrs	Client Info		6246	5023	3987
Oil Age	hrs	Client Info		1223	1036	1970
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	MARGINAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>365	12	31	15
Chromium	ppm	ASTM D5185m	>6	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>5	<1	2	<1
Lead	ppm	ASTM D5185m	>5	<1	2	<1
Copper	ppm	ASTM D5185m	>20	2	3	3
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	4	7	2
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>25	2	1	2
Boron	ppm	ASTM D5185m	0	35	90	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	<1
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	<1	34	▲ 385	5
Calcium	ppm	ASTM D5185m	<1	548	▲ 1256	345
Phosphorus	ppm	ASTM D5185m	2143	1711	▲ 1197	2091
Zinc	ppm	ASTM D5185m	<1	300	▲ 642	240
Sulfur	ppm	ASTM D5185m	23468	17490	▲ 12009	27184
Visc @ 40°C	cSt	ASTM D445	170	105	▲ 69.1	140

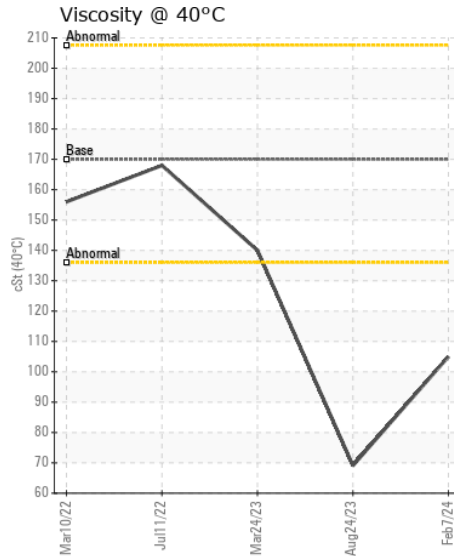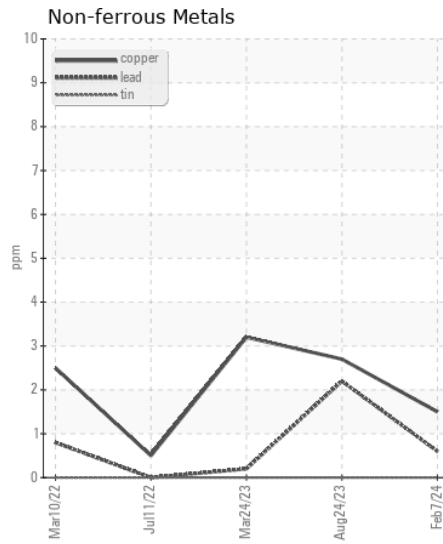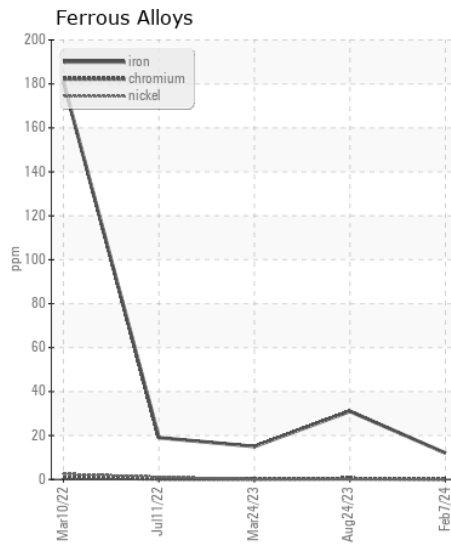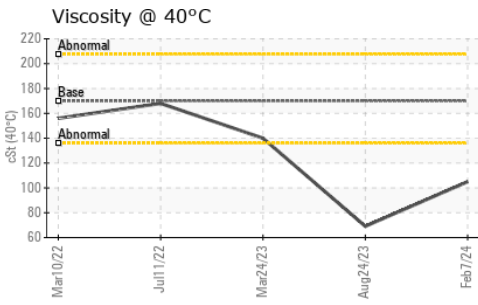

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0268334
Lab Number : 06086422
Unique Number : 10873867
Test Package : CONST
Received : 12 Feb 2024
Tested : 13 Feb 2024
Diagnosed : 13 Feb 2024 - Don Baldrige

JR VINAGRO
 2208 PLAINFIELD PIKE
 JOHNSTON, RI
 US 02919
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: