



**LEAHY-WOLF**  
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**BEELMAN**  
Machine Id  
**John Deere 824K-11 (S/N 1DW824KXTFD)**  
Component  
**Front Axle**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LW0008296</b>	LW0007341	---
Sample Date		Client Info		<b>07 Feb 2024</b>	14 Sep 2023	---
Machine Age	hrs	Client Info		<b>5526</b>	5161	---
Oil Age	hrs	Client Info		<b>5526</b>	5161	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>17</b>	36	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	6	---
Lead	ppm	ASTM D5185m	>25	<b>2</b>	17	---
Copper	ppm	ASTM D5185m	>50	<b>2</b>	6	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>13</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>222</b>	1081	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	9	---
Boron	ppm	ASTM D5185m	6	<b>319</b>	▲ 943	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	5	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	145	<b>57</b>	▲ 29	---
Calcium	ppm	ASTM D5185m	3570	<b>2785</b>	▲ 364	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1010</b>	▲ 513	---
Zinc	ppm	ASTM D5185m	1640	<b>1179</b>	▲ 276	---
Sulfur	ppm	ASTM D5185m		<b>4258</b>	▲ 12974	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.0</b>	▲ 111	---

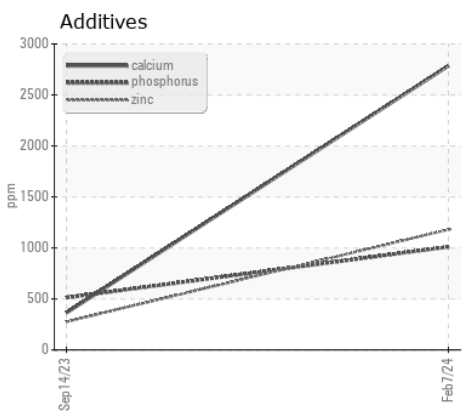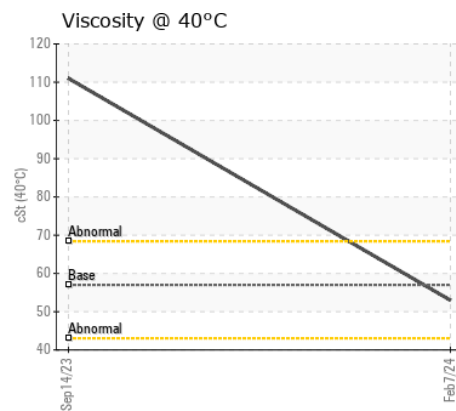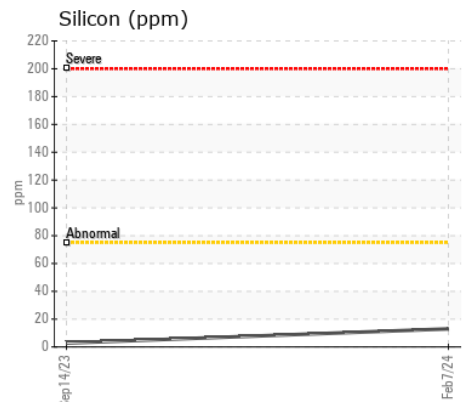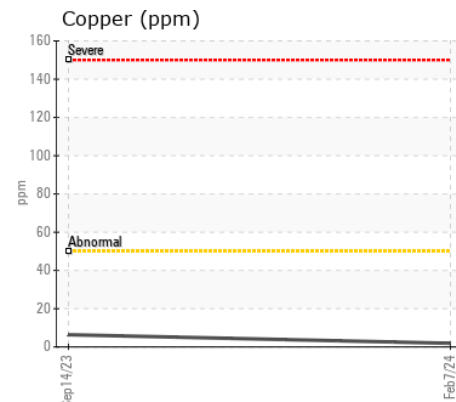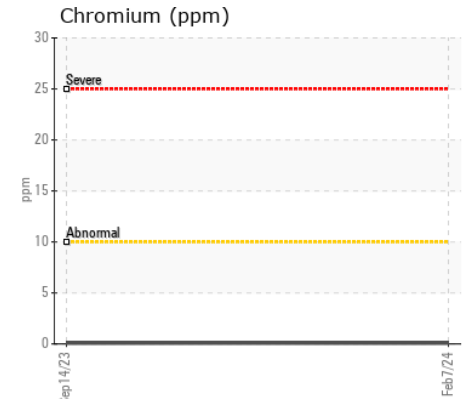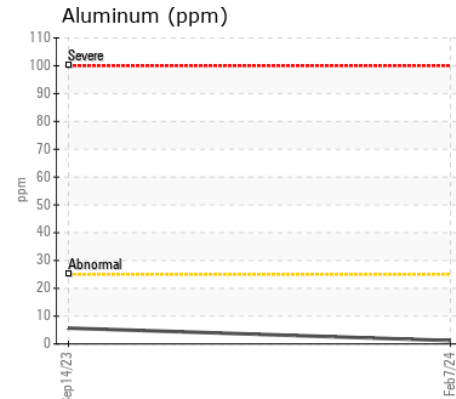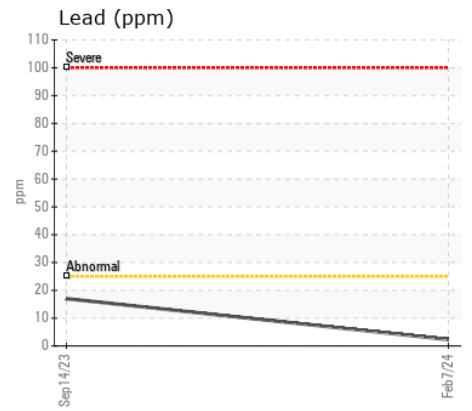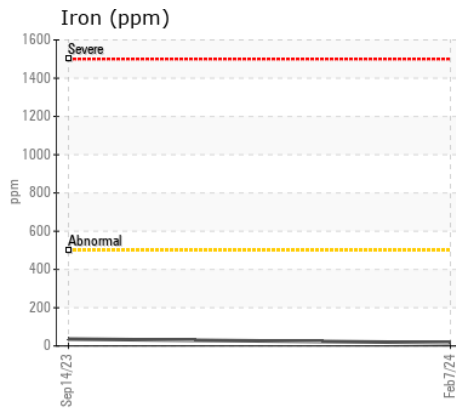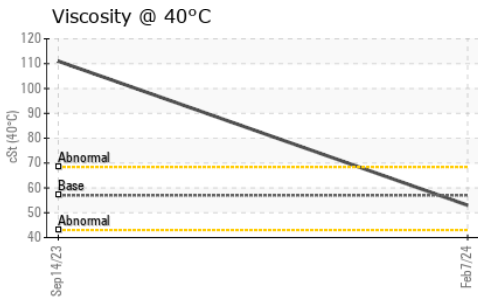

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LW0008296

Lab Number : 06086434

Unique Number : 10873879

Test Package : MOB 1

Received : 12 Feb 2024

Tested : 13 Feb 2024

Diagnosed : 13 Feb 2024 - Wes Davis

**CHICAGO MACHINERY INC**

3142 EAST LINCOLN

LYNWOOD, IL

US 60411-7728

Contact: Mike Korbek

mike@chicagomachineryinc.com

T: (708)758-2060

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)