



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[3598 BULK EXPRESS]**  
Machine Id  
**VOLVO L180H 5720**  
Component  
**Transmission (Auto)**  
Fluid  
**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP440022</b>	VCP432361	VCP434604
Sample Date		Client Info		<b>07 Feb 2024</b>	20 Dec 2023	07 Nov 2023
Machine Age	hrs	Client Info		<b>2615</b>	2139	1692
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>49</b>	59	54
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>225	<b>6</b>	7	6
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	9	9
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	3	3
Boron	ppm	ASTM D5185m	187	<b>74</b>	69	72
Barium	ppm	ASTM D5185m	0.0	<b>1</b>	14	4
Molybdenum	ppm	ASTM D5185m	0.0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	0.0	<b>3</b>	5	5
Magnesium	ppm	ASTM D5185m	6.8	<b>&lt;1</b>	5	3
Calcium	ppm	ASTM D5185m	215	<b>71</b>	83	81
Phosphorus	ppm	ASTM D5185m	445	<b>184</b>	210	197
Zinc	ppm	ASTM D5185m	56	<b>10</b>	19	16
Sulfur	ppm	ASTM D5185m	1336	<b>1625</b>	2321	1713
Visc @ 40°C	cSt	ASTM D445	35.3	<b>27.9</b>	28.1	28.2

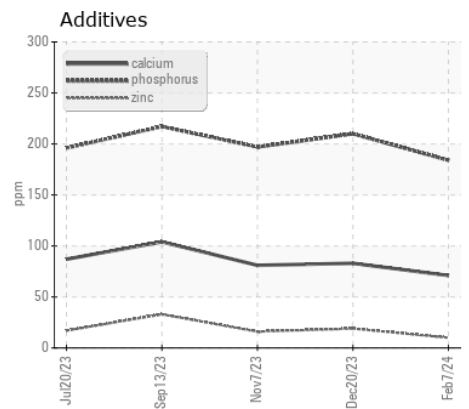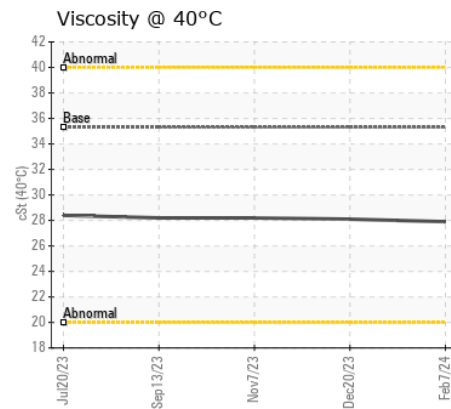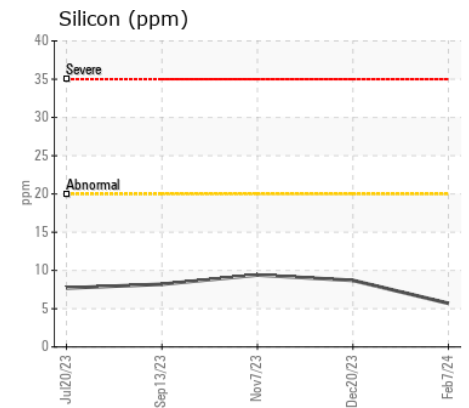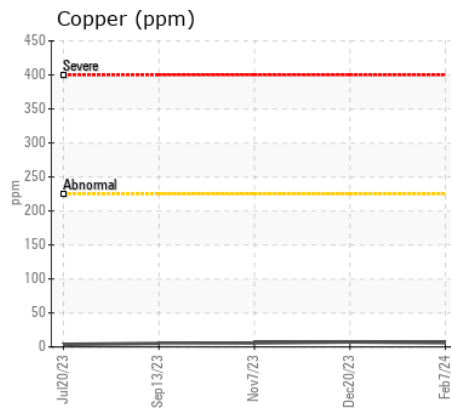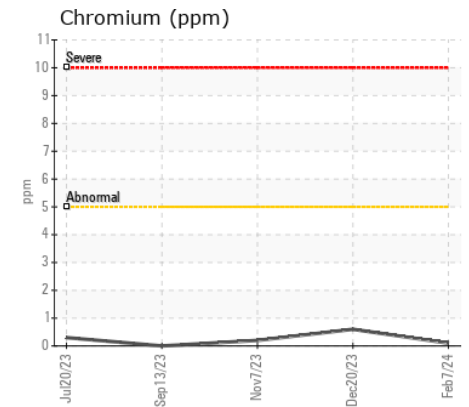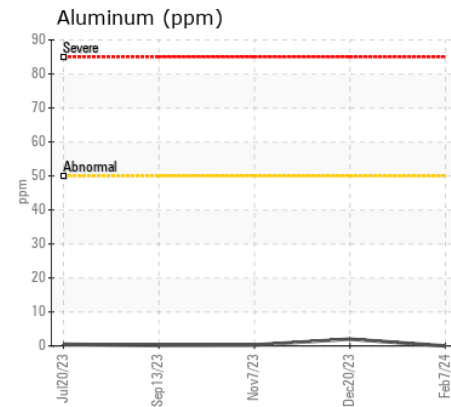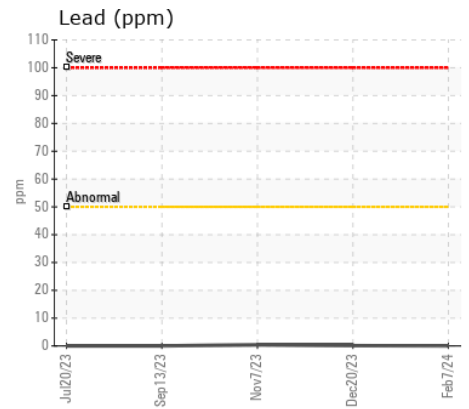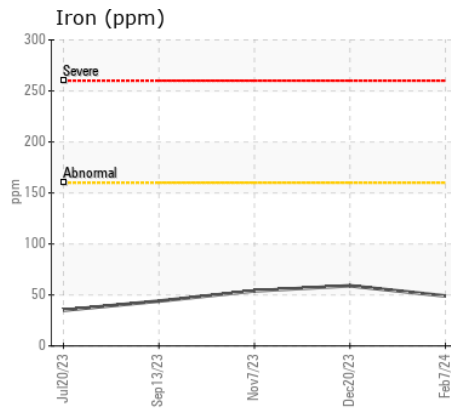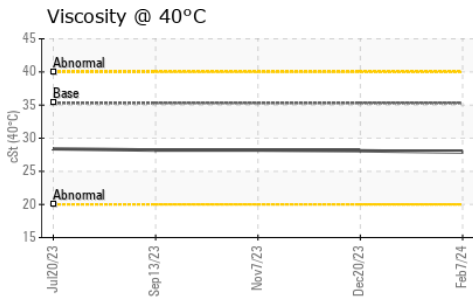

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP440022  
**Lab Number** : 06086456  
**Unique Number** : 10873901  
**Test Package** : MOB 1

**ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC**  
 9601 BOGGY CREEK RD  
 ORLANDO, FL  
 US 32824  
 Contact: Robert LaPlante  
 robert.laplante@altg.com  
 T: (407)508-9736  
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)