



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**920093-260372**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0108124</b>	GFL0102554	GFL0093693
Sample Date		Client Info		<b>29 Jan 2024</b>	30 Nov 2023	17 Oct 2023
Machine Age	hrs	Client Info		<b>9075</b>	8793	8534
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	N/A	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>12</b>	6	8
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>3</b>	5	3
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	3	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	5.7	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.8</b>	18.5	19.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	5	6
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	2
Barium	ppm	ASTM D5185m	0	<b>13</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>61</b>	68	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>909</b>	1086	990
Calcium	ppm	ASTM D5185m	1070	<b>1065</b>	1149	1104
Phosphorus	ppm	ASTM D5185m	1150	<b>964</b>	1112	1041
Zinc	ppm	ASTM D5185m	1270	<b>1201</b>	1382	1298
Sulfur	ppm	ASTM D5185m	2060	<b>3345</b>	3380	3085
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	13.7	13.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.6</b>	8.7	7.8
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.2	14.2

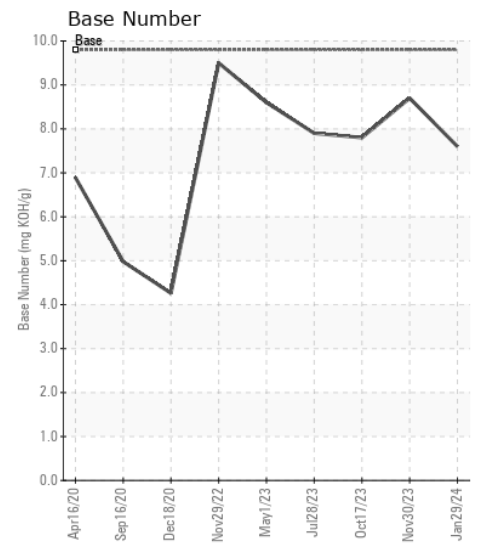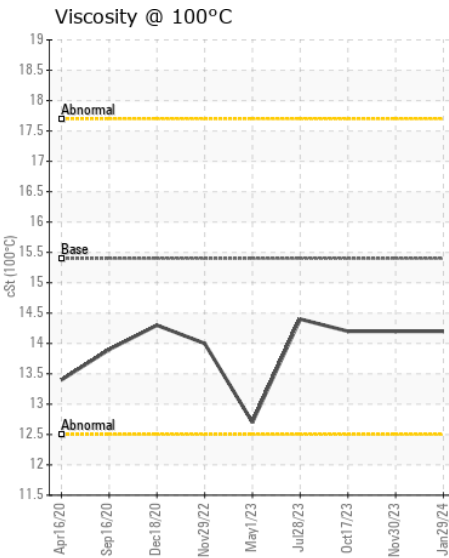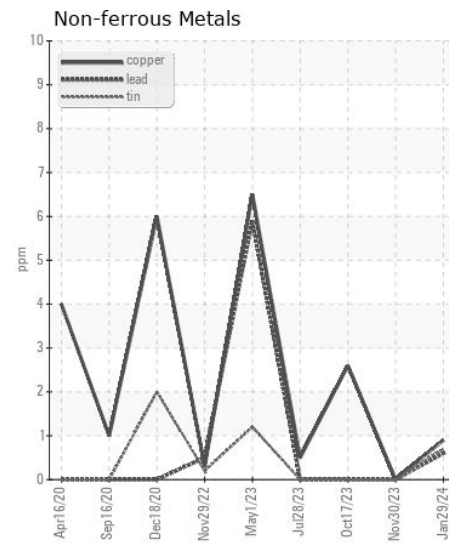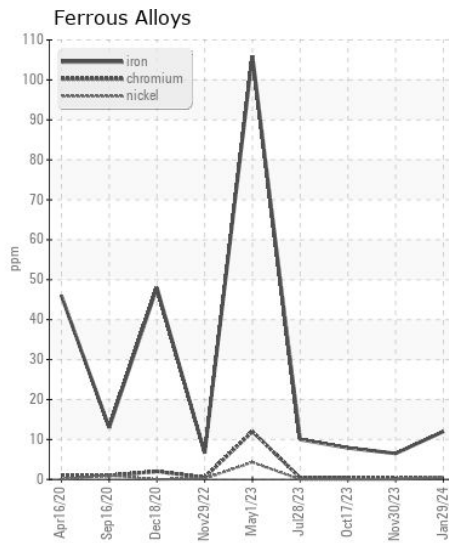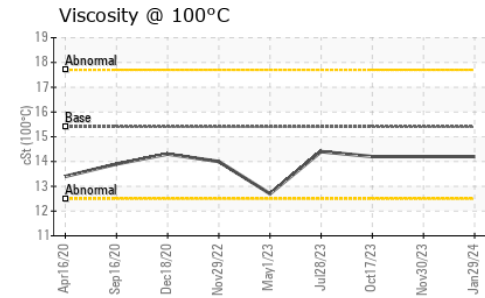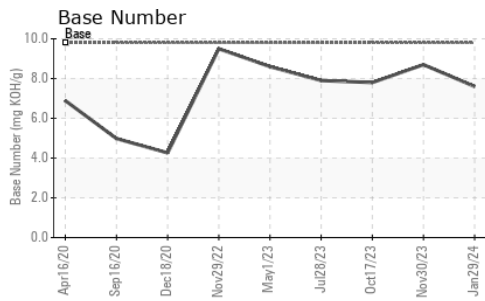

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108124  
**Lab Number** : 06086587  
**Unique Number** : 10874032  
**Test Package** : FLEET

**Received** : 12 Feb 2024  
**Tested** : 13 Feb 2024  
**Diagnosed** : 13 Feb 2024 - Wes Davis

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: JOHNNY PEREZ  
 johnny.perez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: