



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
DAVID LEPPANAN [6528]
 Machine Id
VOLVO PENTA HS1 3101063028
 Component
Inboard Gearbox
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA060014	---	---
Sample Date		Client Info		07 Feb 2024	---	---
Machine Age	hrs	Client Info		2127	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		21	---	---
Iron	ppm	ASTM D5185m	>150	11	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>5	<1	---	---
Lead	ppm	ASTM D5185m	>65	<1	---	---
Copper	ppm	ASTM D5185m	>80	45	---	---
Tin	ppm	ASTM D5185m	>8	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	15	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		379	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		36	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		26	---	---
Calcium	ppm	ASTM D5185m		3009	---	---
Phosphorus	ppm	ASTM D5185m		953	---	---
Zinc	ppm	ASTM D5185m		1130	---	---
Sulfur	ppm	ASTM D5185m		3508	---	---
Visc @ 40°C	cSt	ASTM D445		91.1	---	---

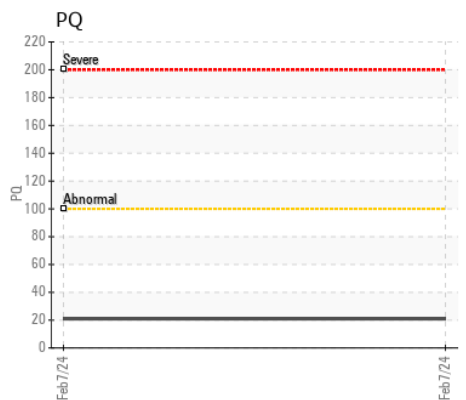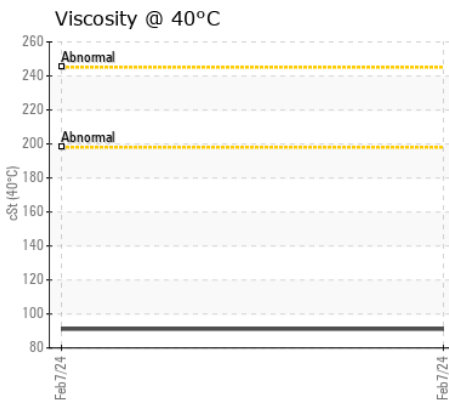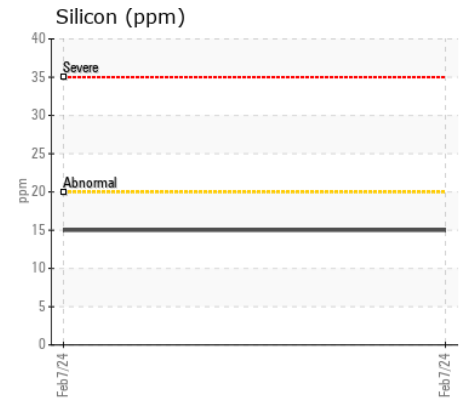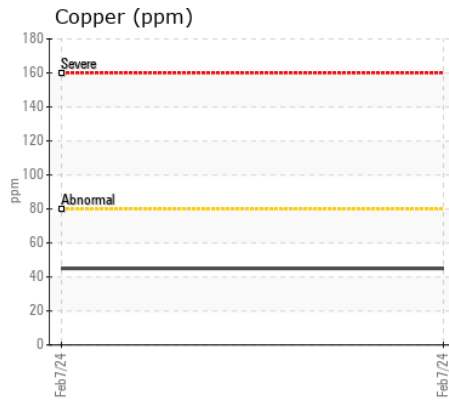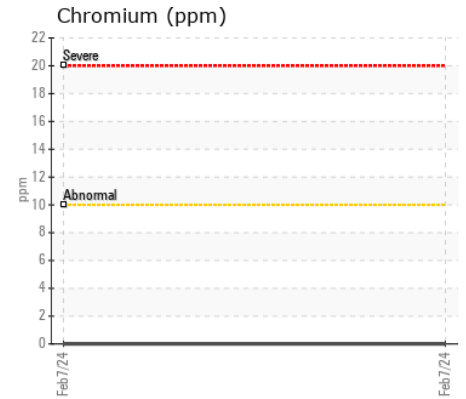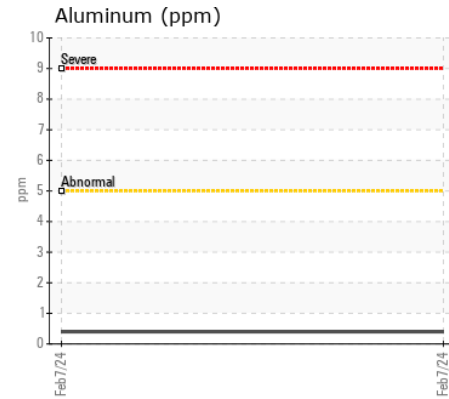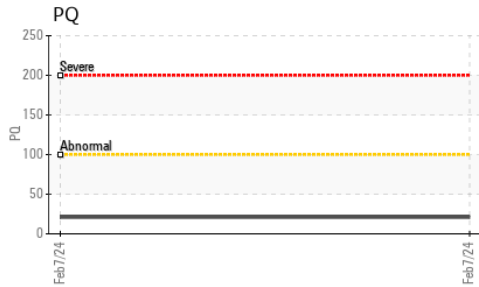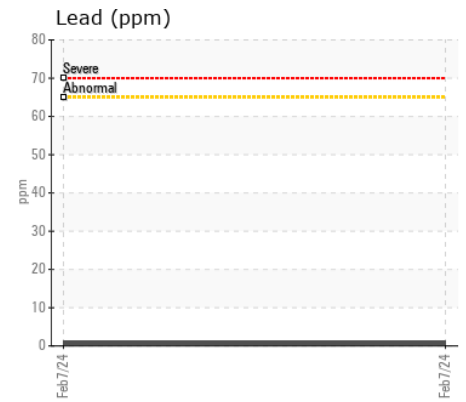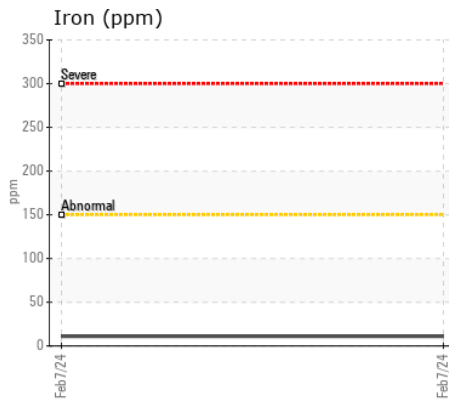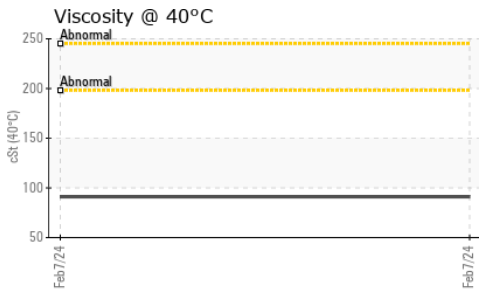

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA060014 **Received** : 12 Feb 2024
Lab Number : 06086737 **Tested** : 13 Feb 2024
Unique Number : 10874182 **Diagnosed** : 14 Feb 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: PQ)

Northwest Diesel Power
 1325 ROEDER AVE SUITE 103
 BELLINGHAM, WA
 US 98225
 Contact: BRANDON ROBERTSON
 parts@nwdieselpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: