



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
OKLAHOMA/102/EG - EXCAVATOR
Machine Id
20.209L [OKLAHOMA^102^EG - EXCAVATOR]
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (3 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: 250 hrs)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0864319	WC0746069	---
Sample Date		Client Info		31 Jan 2024	07 Sep 2023	---
Machine Age	hrs	Client Info		250	0	---
Oil Age	hrs	Client Info		74	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changed	---
Sample Status				ATTENTION	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	21	6	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	<1	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	7	4	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Fuel content negligible. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	21	16	---
Potassium	ppm	ASTM D5185m	>20	3	<1	---
Fuel	%	ASTM D3524	>5	1.0	0.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	5.5	4.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.3	20.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m	0	58	71	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	40	39	---
Manganese	ppm	ASTM D5185m		7	7	---
Magnesium	ppm	ASTM D5185m	0	423	463	---
Calcium	ppm	ASTM D5185m		1429	1675	---
Phosphorus	ppm	ASTM D5185m		858	922	---
Zinc	ppm	ASTM D5185m		1031	1112	---
Sulfur	ppm	ASTM D5185m		2749	3747	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	9.0	9.6	---
Visc @ 100°C	cSt	ASTM D445	14	10.7	11.3	---

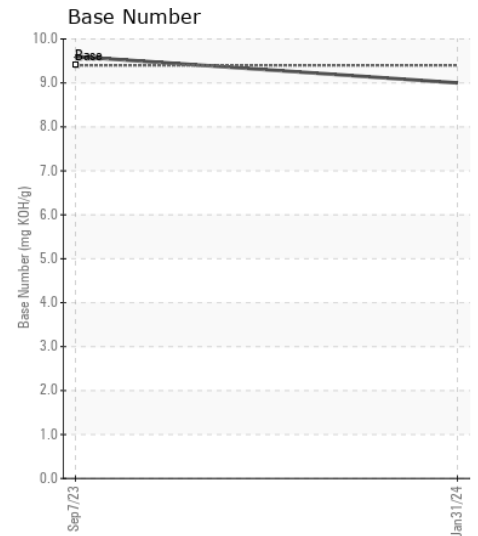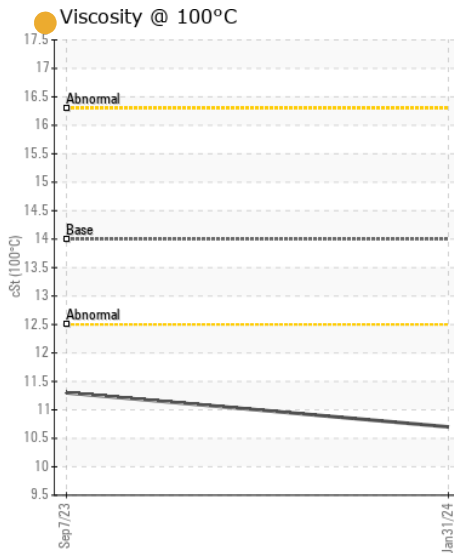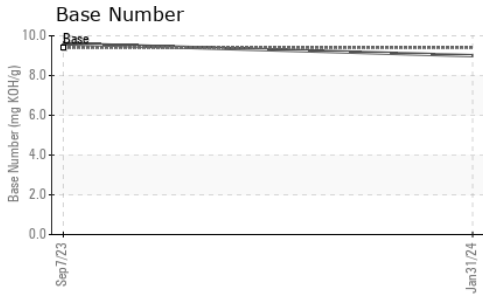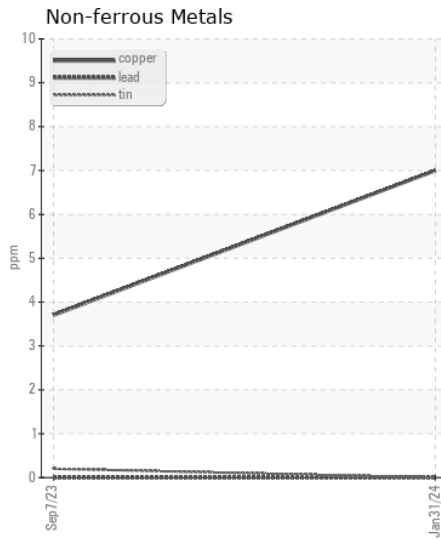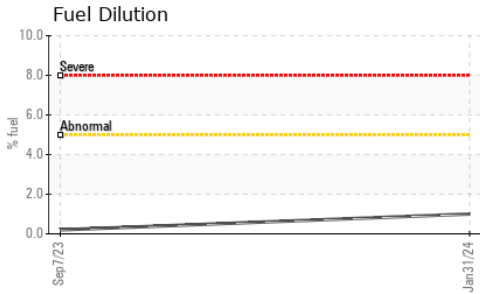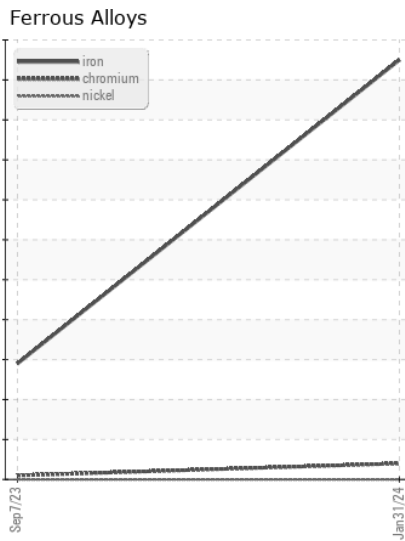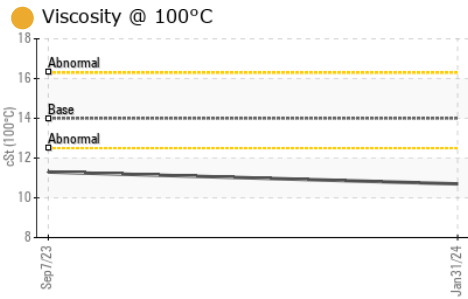

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0864319 **Received** : 13 Feb 2024
Lab Number : 06086861 **Tested** : 14 Feb 2024
Unique Number : 10874306 **Diagnosed** : 14 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: SHAWN SOUTH
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: x: