



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L150G NR23026
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP442887	VCP436350	VCP418079
Sample Date		Client Info		02 Feb 2024	05 Dec 2023	06 Sep 2023
Machine Age	hrs	Client Info		13240	13014	12744
Oil Age	hrs	Client Info		226	270	279
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	2	3	2
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	2	7
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>20	2	2	1
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	4	3
Potassium	ppm	ASTM D5185m	>20	2	1	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	5.8	6.0	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	21.5	21.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	8	4
Boron	ppm	ASTM D5185m	0	63	62	48
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	48	42	41
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	0	515	517	560
Calcium	ppm	ASTM D5185m		1546	1640	1649
Phosphorus	ppm	ASTM D5185m		716	746	772
Zinc	ppm	ASTM D5185m		905	932	944
Sulfur	ppm	ASTM D5185m		2297	2425	3123
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	19.7	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	9.8	10.2	10.3
Visc @ 100°C	cSt	ASTM D445	14	12.7	12.7	12.6

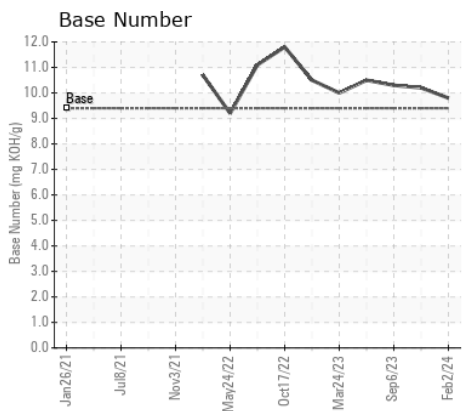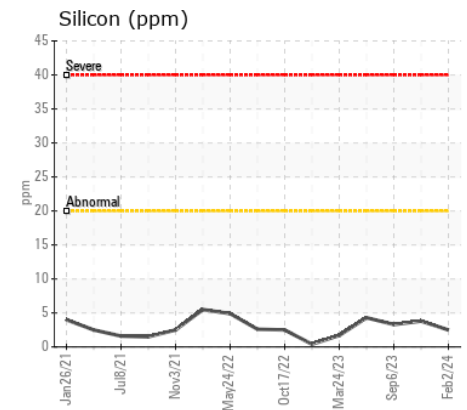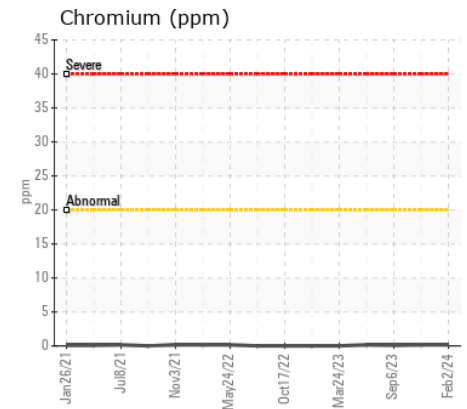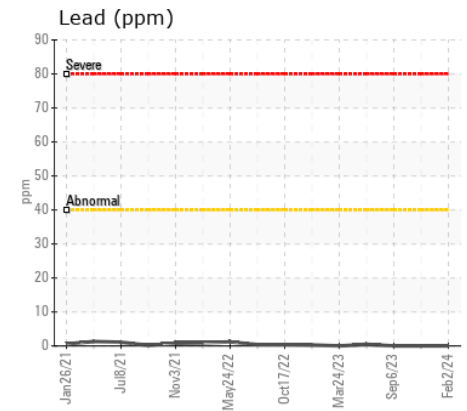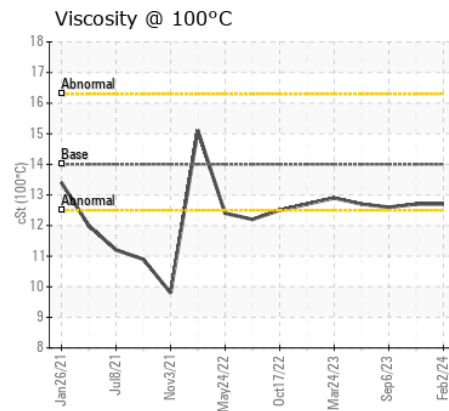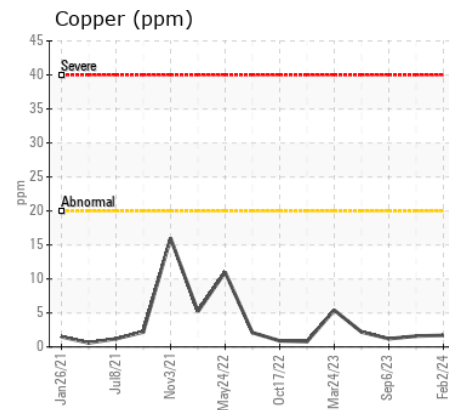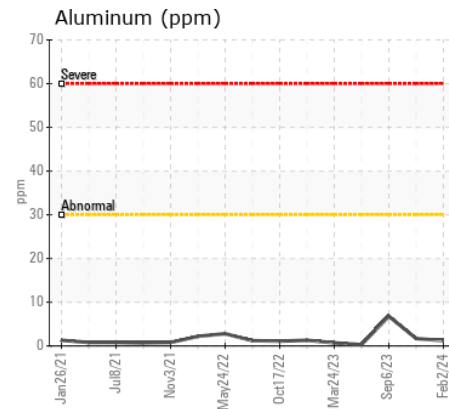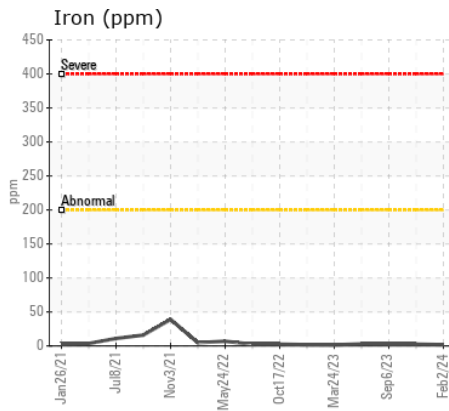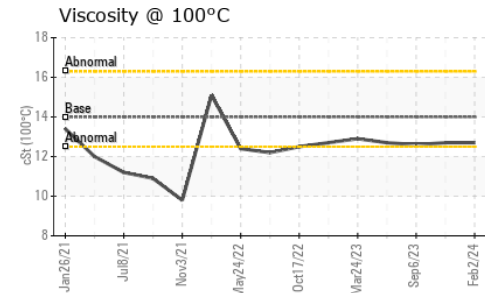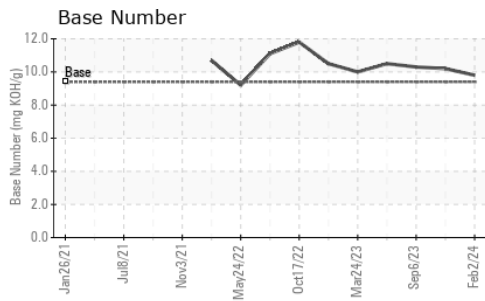

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP442887

Lab Number : 06087025

Unique Number : 10874470

Test Package : MOB 1 (Additional Tests: TBN)

Received : 13 Feb 2024

Tested : 14 Feb 2024

Diagnosed : 14 Feb 2024 - Wes Davis

MARYLAND ENVIRONMENTAL SERVICES

21210 MARTINSBURG RD

DICKERSON, MD

US 20842

Contact: ALAN PARRISH

aparr@menv.com

T: (301)428-8185

F: (301)428-8311

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)