



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area **K5 CONSTRUCTION CORPORATION - HODGKINS IL**

Machine Id **1854**

Component **Diesel Engine**

Fluid **LEAHY WOLF PREMIUM 15W40 (6 hrs)**

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0008509	LW0004921	LW0003786
Sample Date		Client Info		01 Feb 2024	07 Jul 2022	24 Nov 2021
Machine Age	hrs	Client Info		1657	1212	1019
Oil Age	hrs	Client Info		445	193	285
Filter Age	hrs	Client Info		445	193	285
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	4	5
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	1	1	2
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	2	<1	1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	6	8
Potassium	ppm	ASTM D5185m	>20	2	0	4
Fuel		WC Method	>5	<1.0	<1.0	▲ 4.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	6.8	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	19.5	19.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	2	2
Boron	ppm	ASTM D5185m		5	9	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		62	59	55
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		927	916	999
Calcium	ppm	ASTM D5185m		1114	1124	1136
Phosphorus	ppm	ASTM D5185m		939	1043	1038
Zinc	ppm	ASTM D5185m		1247	1217	1200
Sulfur	ppm	ASTM D5185m		2801	3817	3469
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	16.2	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.7	9.9	9.4
Visc @ 100°C	cSt	ASTM D445	15.6	▲ 12.1	▲ 12.0	▲ 12.0

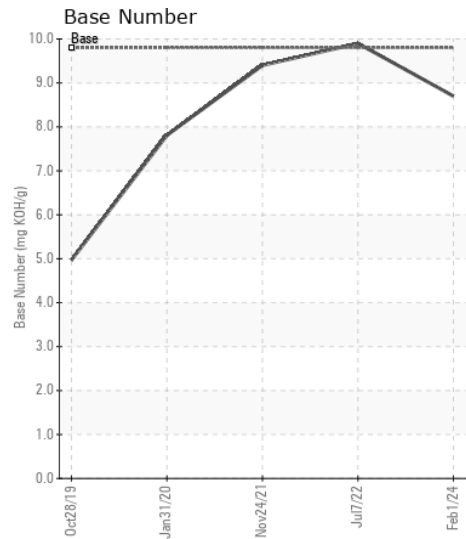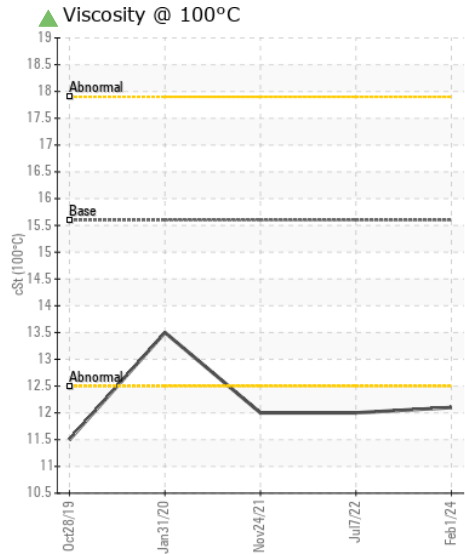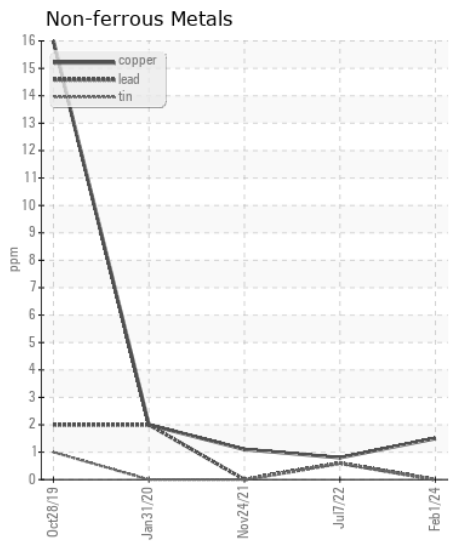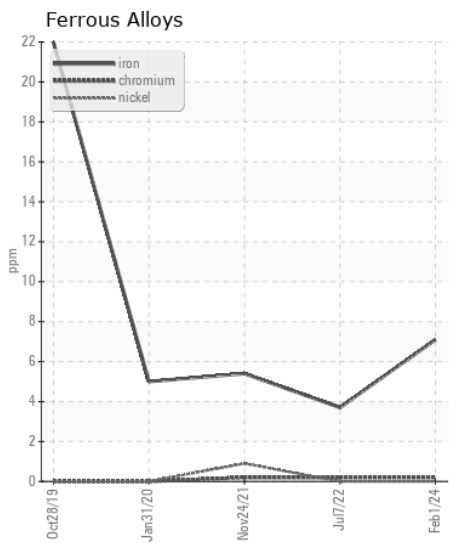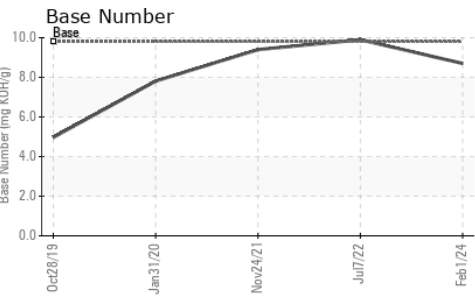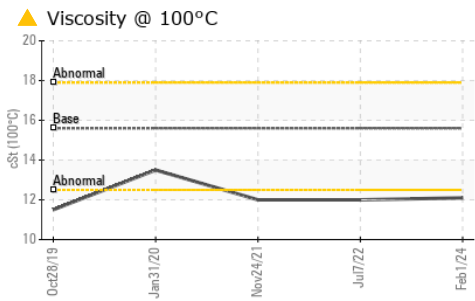

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0008509 **Received** : 13 Feb 2024
Lab Number : 06087032 **Tested** : 14 Feb 2024
Unique Number : 10874477 **Diagnosed** : 14 Feb 2024 - Don Baldrige
Test Package : FLEET

K5 CONSTRUCTION CORPORATION
 6301 S EAST AVENUE
 HODGKINS, IL
 US 60525
 Contact: Dave Gorski
 daveg@k-five.net
 T: (630)257-5600
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)