



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 700L 50.007 (S/N 428325)**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0203799</b>	---	---
Sample Date		Client Info		<b>31 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1732</b>	---	---
Oil Age	hrs	Client Info		<b>500</b>	---	---
Filter Age	hrs	Client Info		<b>500</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

Iron	ppm	ASTM D5185m	>51	<b>16</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>31	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>26	<b>▲ 37</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION

Silicon	ppm	ASTM D5185m	>22	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.21	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	---	---


### FLUID CONDITION

Sodium	ppm	ASTM D5185m	>216	<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	250	<b>15</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	100	<b>73</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	450	<b>854</b>	---	---
Calcium	ppm	ASTM D5185m	3000	<b>1219</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>874</b>	---	---
Zinc	ppm	ASTM D5185m	1350	<b>1238</b>	---	---
Sulfur	ppm	ASTM D5185m	4250	<b>2847</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.5</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.9</b>	---	---


▲ Non-ferrous Metals




Ferrous Alloys

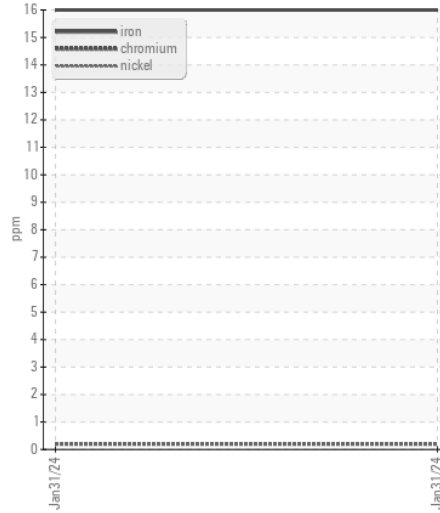


Base Number

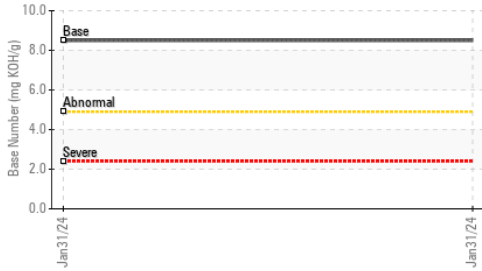


Viscosity @ 100°C

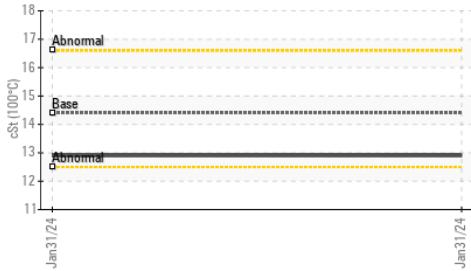


▲ Non-ferrous Metals

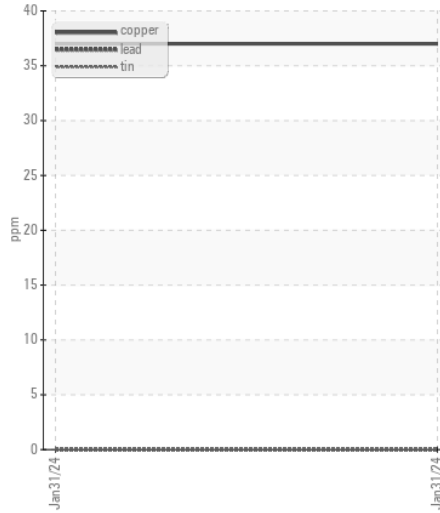

Viscosity @ 100°C

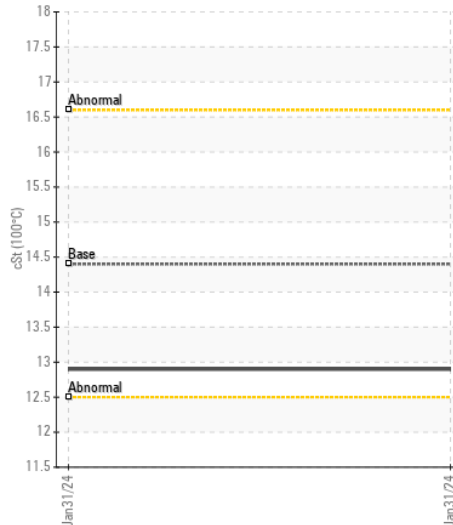

Base Number

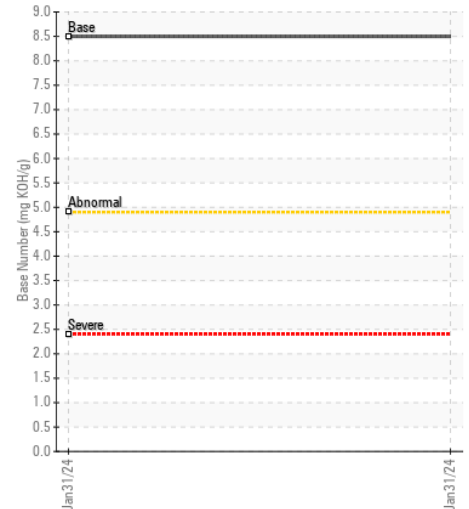

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0203799 **Received** : 13 Feb 2024  
**Lab Number** : 06087122 **Tested** : 14 Feb 2024  
**Unique Number** : 10874567 **Diagnosed** : 14 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CAROLINA CIVIL**  
 6213 OAK RIDGE RD  
 CLOVER, SC  
 US 29710  
 Contact: ROY TAYLOR  
 roy.taylor@carolinacivil.net  
 T: (803)818-7309  
 F: