



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area
ULTRACHEM 46S
 Machine Id
EATON EC-SRW-070638R - STOLLE MACHINERY
 Component
Compressor

RECOMMENDATION

We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal.








CONTAMINATION

Excessive free water present.

FLUID CONDITION

The AN level is acceptable for this fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCH06087467	UCH05141378	UCH04604615
Sample Date		Client Info		07 Feb 2024	15 Dec 2020	20 Nov 2018
Machine Age	hrs	Client Info		28734	26613	24801
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		Not Changd	N/A	Changed
Sample Status				ATTENTION	ATTENTION	NORMAL
Iron	ppm	ASTM D5185m	>50	3	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	0
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	3	4	3
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.1	0.039	0.017	---
ppm Water	ppm	ASTM D6304	>1000	390	170	---
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	0.2%	0.2%	NEG
Sodium	ppm	ASTM D5185m		<1	0	0
Boron	ppm	ASTM D5185m	0.9	0	0	0
Barium	ppm	ASTM D5185m	0.1	10	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0.2	0	0	0
Magnesium	ppm	ASTM D5185m	0.9	0	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	224	68	132	214
Zinc	ppm	ASTM D5185m	0	7	6	23
Sulfur	ppm	ASTM D5185m	273	1053	187	362
Acid Number (AN)	mg KOH/g	ASTM D8045	0.103	0.071	0.12	0.099
Visc @ 40°C	cSt	ASTM D445	41.61	52.2	51.2	47.75

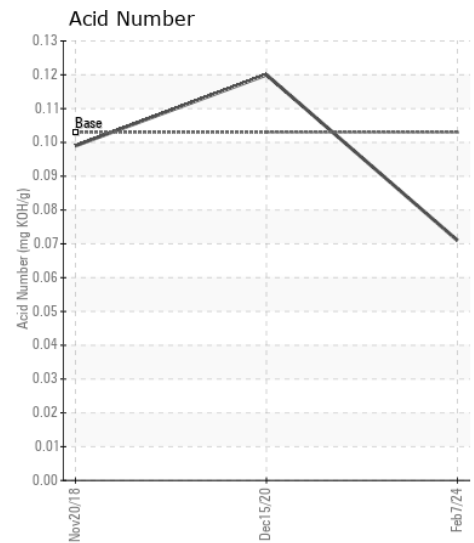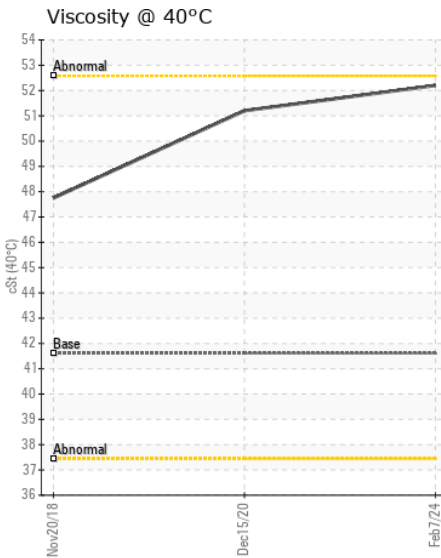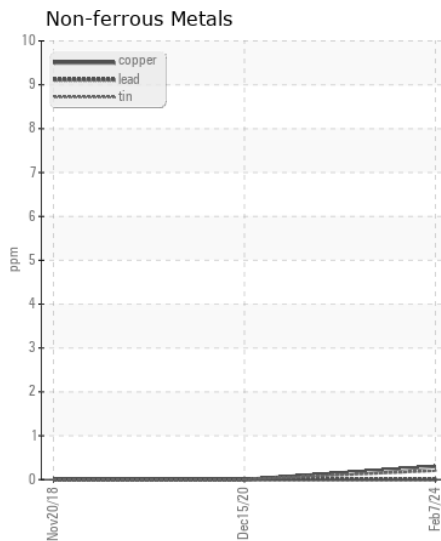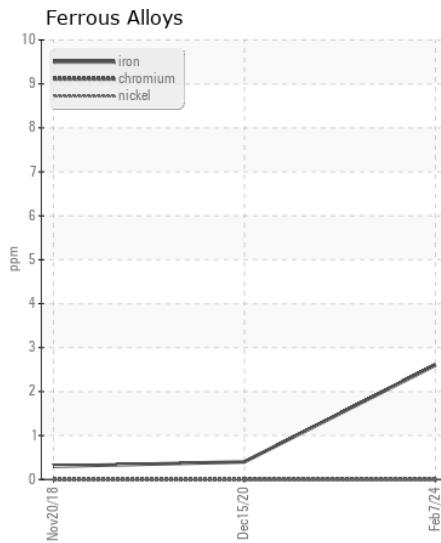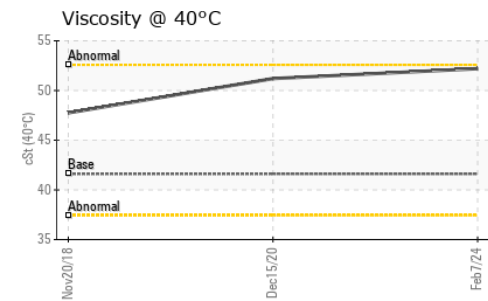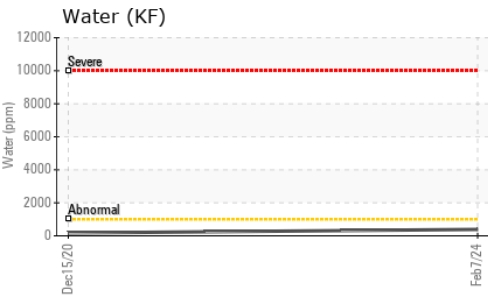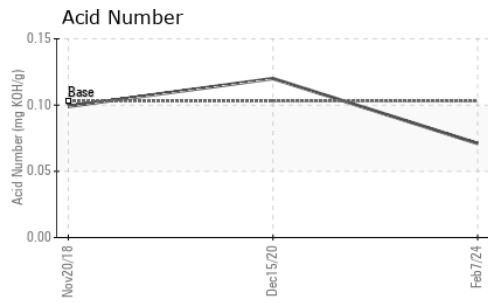

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCH06087467 **Received** : 13 Feb 2024
Lab Number : 06087467 **Tested** : 14 Feb 2024
Unique Number : 10874912 **Diagnosed** : 14 Feb 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF)

AIR HANDLING EQUIPMENT INC
 1389 RIVERSIDE DR
 SIDNEY, OH
 US 45365
 Contact: ANGIE ROSENBECK
 angie@ahequip.net
 T: (937)658-6266
 F: (937)492-3147

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)