



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W49818]
 Machine Id
JOHN DEERE 260E 1DW260ETCMF711589
 Component
Transmission (Auto)
 Fluid
JOHN DEERE HD SynTran (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200026	JR0125072	---
Sample Date		Client Info		09 Feb 2024	24 May 2022	---
Machine Age	hrs	Client Info		1984	711	---
Oil Age	hrs	Client Info		1984	711	---
Filter Age	hrs	Client Info		1984	711	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	32	26	---
Iron	ppm	ASTM D5185m	>160	59	27	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>5	0	<1	---
Aluminum	ppm	ASTM D5185m	>50	1	<1	---
Lead	ppm	ASTM D5185m	>50	10	11	---
Copper	ppm	ASTM D5185m	>225	2	2	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	4	---
Potassium	ppm	ASTM D5185m	>20	5	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	4	---
Boron	ppm	ASTM D5185m	168	125	126	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		3	2	---
Calcium	ppm	ASTM D5185m	33	122	134	---
Phosphorus	ppm	ASTM D5185m	330	255	284	---
Zinc	ppm	ASTM D5185m	0	24	26	---
Sulfur	ppm	ASTM D5185m	980	452	434	---
Visc @ 40°C	cSt	ASTM D445	39	36.9	37.1	---

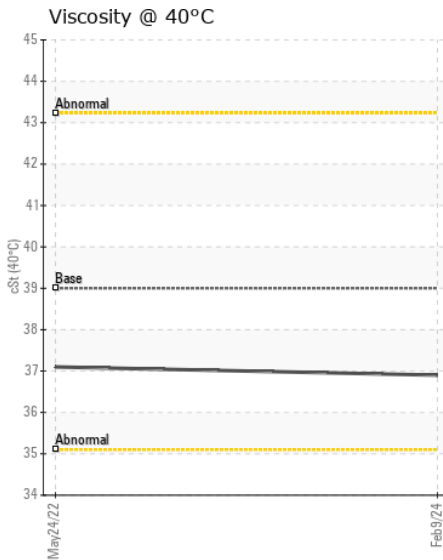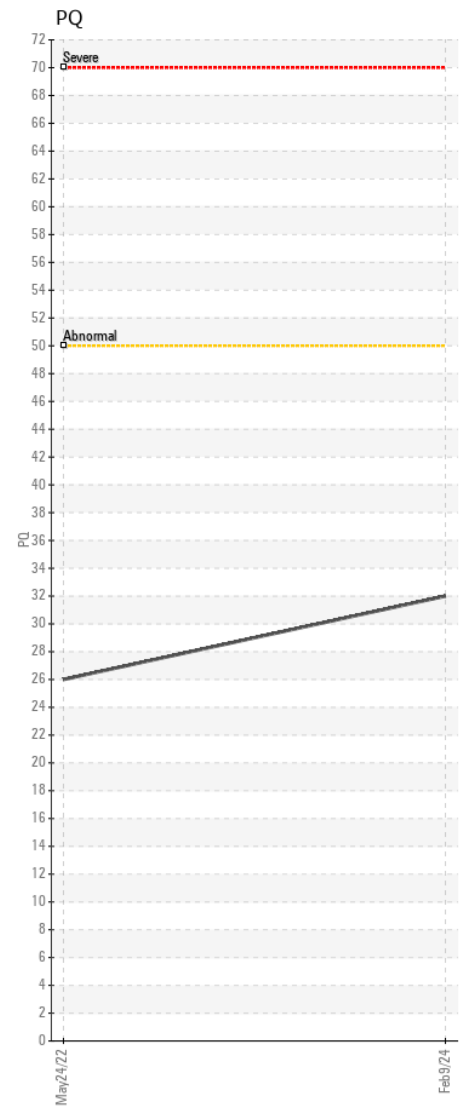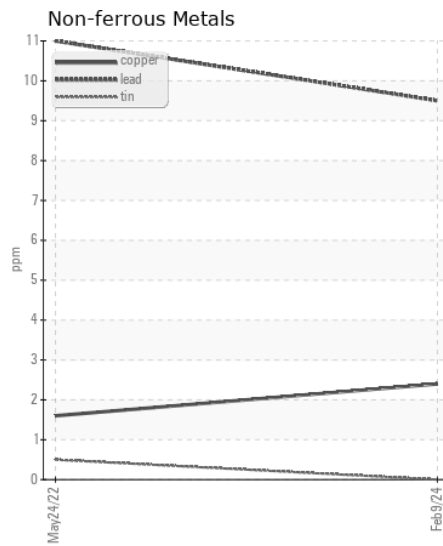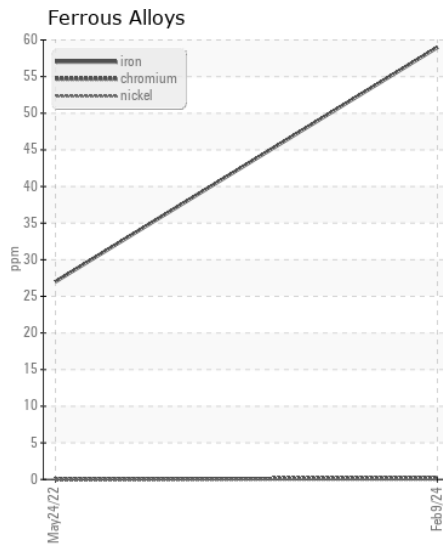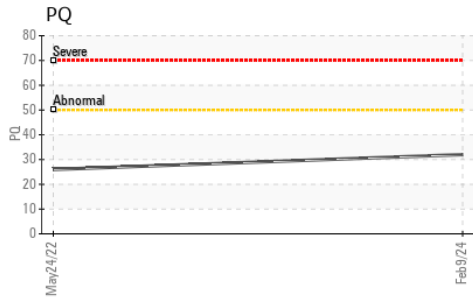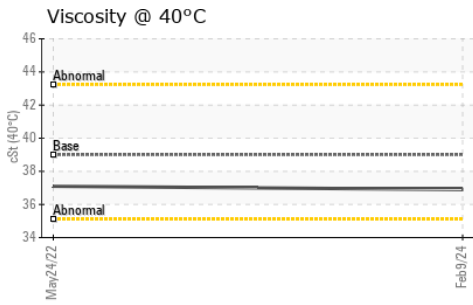

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200026 **Received** : 13 Feb 2024
Lab Number : 06087612 **Tested** : 14 Feb 2024
Unique Number : 10875057 **Diagnosed** : 14 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)