



OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**K5 CONSTRUCTION CORPORATION - HODGKINS IL**  
Machine Id  
**2050**  
Component  
**Right Planetary**  
Fluid  
**LEAHY WOLF TRANSMASTER T04 50 (1 hrs)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LW0008550</b>	LW0006349	LW0003239
Sample Date		Client Info		<b>01 Feb 2024</b>	01 Mar 2023	30 Sep 2021
Machine Age	hrs	Client Info		<b>5060</b>	4007	3048
Oil Age	hrs	Client Info		<b>1053</b>	959	337
Filter Age	hrs	Client Info		<b>0</b>	959	337
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>39</b>	24	23
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>75	<b>2</b>	2	1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>10</b>	8	10
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	8
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	1
Boron	ppm	ASTM D5185m	2	<b>6</b>	10	7
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	4	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	9	<b>20</b>	32	20
Calcium	ppm	ASTM D5185m	3114	<b>2637</b>	2896	3035
Phosphorus	ppm	ASTM D5185m	1099	<b>826</b>	1025	914
Zinc	ppm	ASTM D5185m	1245	<b>1137</b>	1230	1069
Sulfur	ppm	ASTM D5185m	7086	<b>5099</b>	6343	8140
Visc @ 40°C	cSt	ASTM D445	213.9	<b>220</b>	189	206

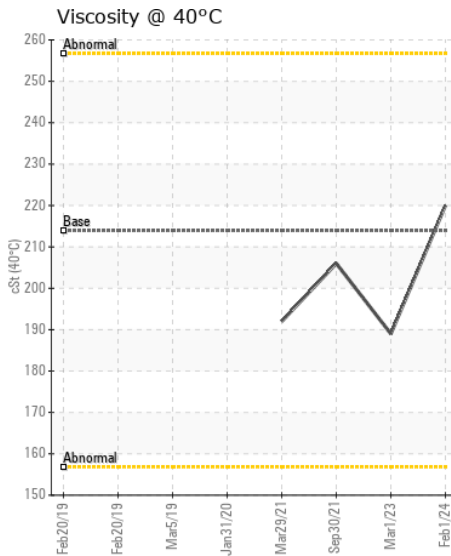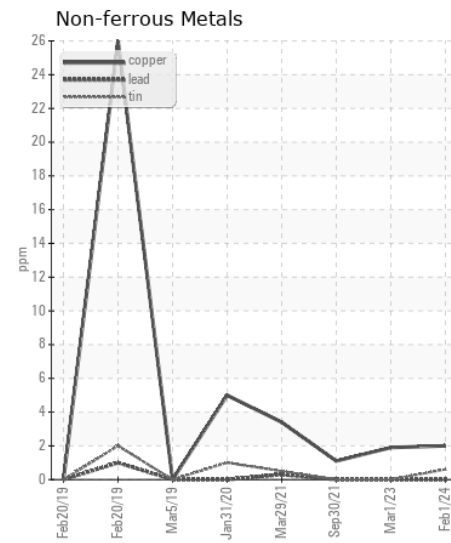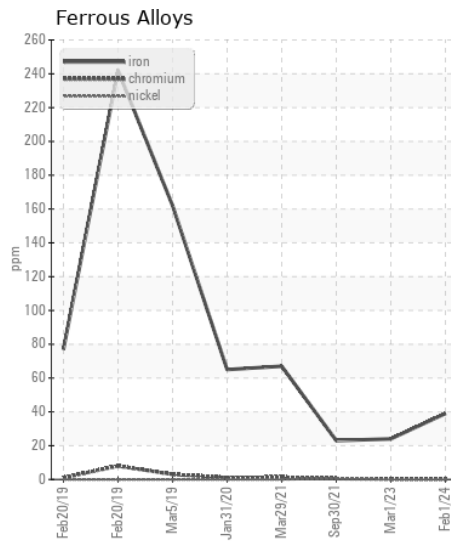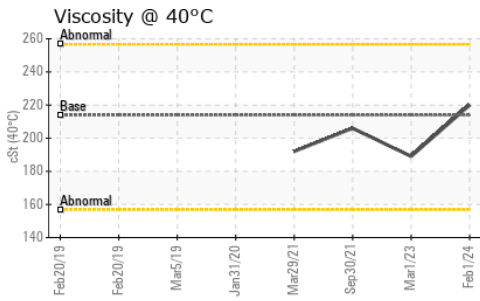

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LW0008550  
**Lab Number** : 06087779  
**Unique Number** : 10875224  
**Test Package** : FLEET

**Received** : 13 Feb 2024  
**Tested** : 14 Feb 2024  
**Diagnosed** : 14 Feb 2024 - Wes Davis

**K5 CONSTRUCTION CORPORATION**  
 6301 S EAST AVENUE  
 HODGKINS, IL  
 US 60525  
 Contact: Dave Gorski  
 daveg@k-five.net  
 T: (630)257-5600  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)