



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**420086**  
 Component  
**Transmission (Auto)**  
 Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: Transmission )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0105454</b>	GFL0085485	GFL0075332
Sample Date		Client Info		<b>07 Feb 2024</b>	11 Oct 2023	20 May 2023
Machine Age	mls	Client Info		<b>217346</b>	208332	190226
Oil Age	mls	Client Info		<b>217346</b>	208332	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>23</b>	33	79
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>7</b>	12	34
Lead	ppm	ASTM D5185m	>50	<b>5</b>	7	14
Copper	ppm	ASTM D5185m	>225	<b>72</b>	27	26
Tin	ppm	ASTM D5185m	>10	<b>1</b>	2	6
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	3	6
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	3
Boron	ppm	ASTM D5185m		<b>31</b>	68	49
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	2	3
Calcium	ppm	ASTM D5185m		<b>298</b>	391	90
Phosphorus	ppm	ASTM D5185m		<b>360</b>	389	160
Zinc	ppm	ASTM D5185m		<b>8</b>	35	24
Sulfur	ppm	ASTM D5185m		<b>861</b>	1255	756
Visc @ 40°C	cSt	ASTM D445	35.0	<b>27.2</b>	26.0	23.4

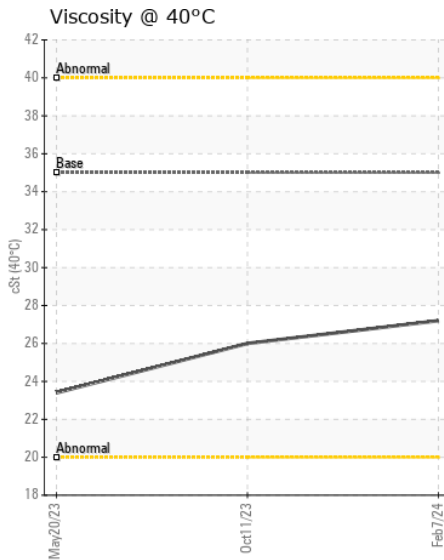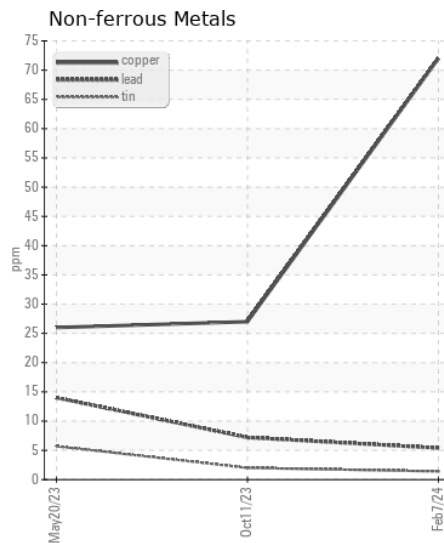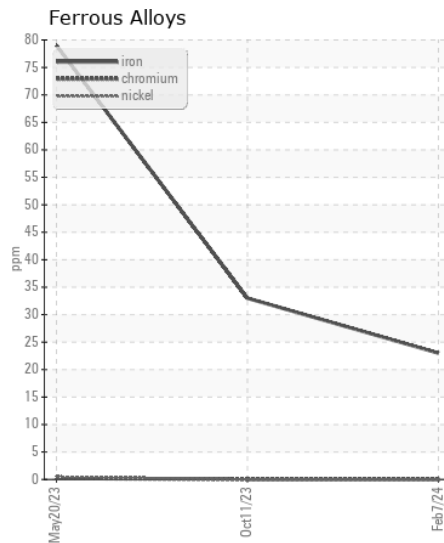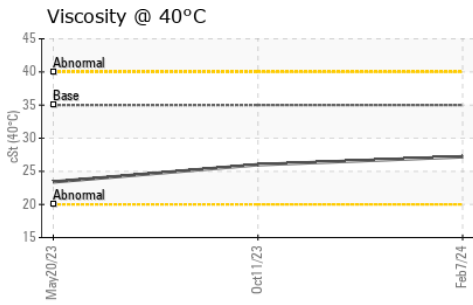

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105454  
**Lab Number** : 06087815  
**Unique Number** : 10875260  
**Test Package** : FLEET

**Received** : 13 Feb 2024  
**Tested** : 14 Feb 2024  
**Diagnosed** : 15 Feb 2024 - Jonathan Hester

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: