



LEAHY-WOLF
Lubricating specialists since 1946

WEAR

NORMAL

CONTAMINATION

NORMAL

FLUID CONDITION

NORMAL

OIL ANALYSIS REPORT



Area
K5 CONSTRUCTION CORPORATION - HODGKINS IL
Machine Id
1718
Component
Hydraulic System
Fluid
CAT HYDO (50 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0008901	LW0007173	LW0005053
Sample Date		Client Info		05 Feb 2024	23 May 2023	19 Jun 2022
Machine Age	hrs	Client Info		2742	2075	1011
Oil Age	hrs	Client Info		667	2075	0
Filter Age	hrs	Client Info		0	2075	0
Oil Changed		Client Info		Not Changed	Changed	N/A
Filter Changed		Client Info		Not Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	7	9	6
Chromium	ppm	ASTM D5185m	>10	2	2	1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	<1	1	<1
Copper	ppm	ASTM D5185m	>75	4	5	5
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	6	2	1
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	4	2
Boron	ppm	ASTM D5185m		28	3	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		43	8	6
Calcium	ppm	ASTM D5185m		1358	306	222
Phosphorus	ppm	ASTM D5185m	1100	769	744	661
Zinc	ppm	ASTM D5185m	1210	1037	983	872
Sulfur	ppm	ASTM D5185m		2229	2243	1616
Visc @ 40°C	cSt	ASTM D445	37.9	42.8	40.5	39.0

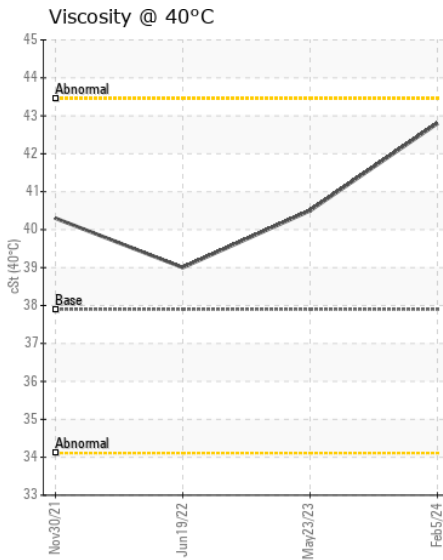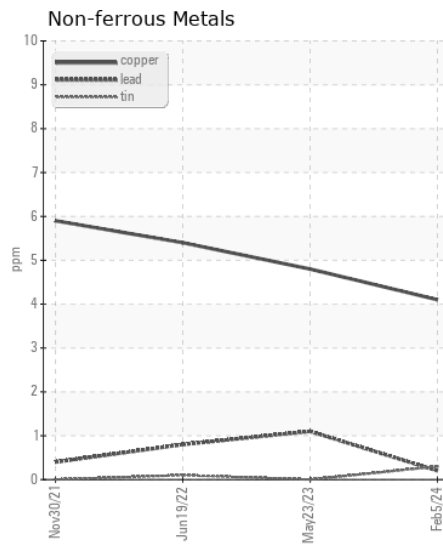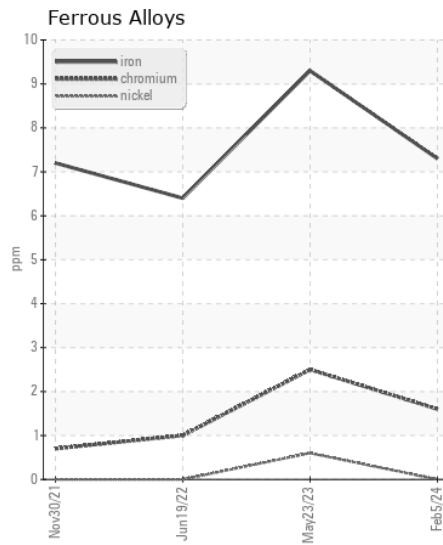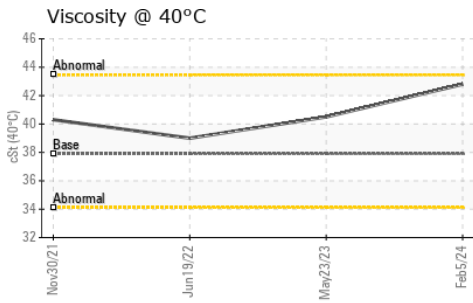

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0008901
Lab Number : 06087842
Unique Number : 10875287
Test Package : FLEET

Received : 13 Feb 2024
Tested : 14 Feb 2024
Diagnosed : 15 Feb 2024 - Jonathan Hester

K5 CONSTRUCTION CORPORATION
 6301 S EAST AVENUE
 HODGKINS, IL
 US 60525
 Contact: FRANCISCO MUNOZ
 franciscom@k-five.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: