



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
748008-361683
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0081094	GFL0081035	GFL0081047
Sample Date		Client Info		12 Feb 2024	17 Nov 2023	24 Aug 2023
Machine Age	hrs	Client Info		16347	15797	15247
Oil Age	hrs	Client Info		1200	561	1200
Filter Age	hrs	Client Info		1200	561	1200
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	10	7	12
Chromium	ppm	ASTM D5185m	>4	2	1	2
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	1	4
Lead	ppm	ASTM D5185m	>30	<1	<1	2
Copper	ppm	ASTM D5185m	>35	0	2	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	4	3	4
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	11.4	11.0	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.5	21.7	23.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		7	7	8
Boron	ppm	ASTM D5185m	50	8	10	6
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	50	53	48	58
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	560	564	499	587
Calcium	ppm	ASTM D5185m	1510	1620	1552	1860
Phosphorus	ppm	ASTM D5185m	780	766	670	809
Zinc	ppm	ASTM D5185m	870	1028	951	1102
Sulfur	ppm	ASTM D5185m	2040	2558	2337	3198
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	17.6	18.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	3.7	5.8	3.6
Visc @ 100°C	cSt	ASTM D445	15.1	15.0	14.9	14.8

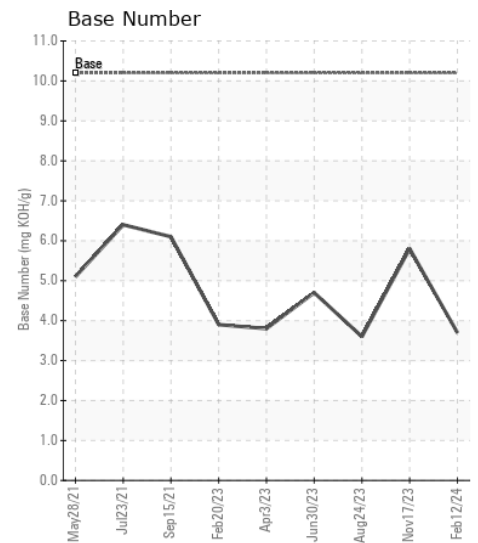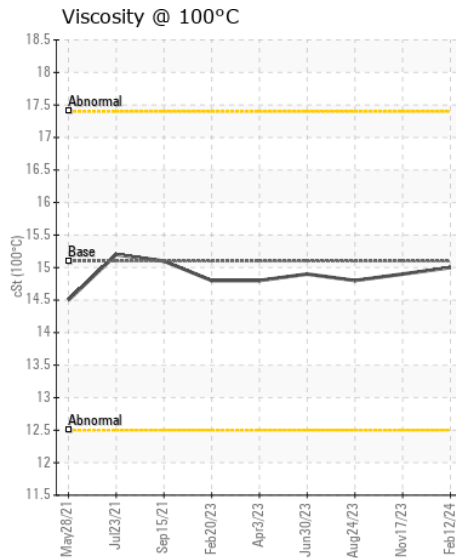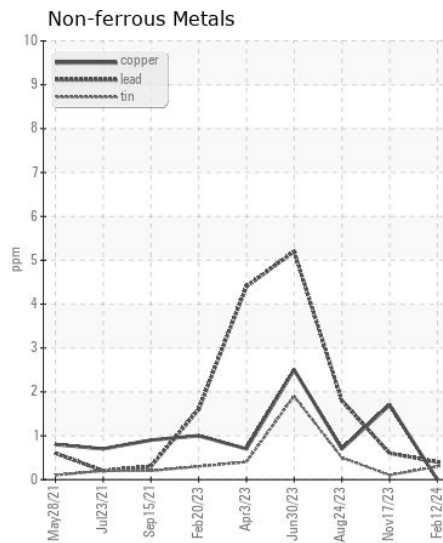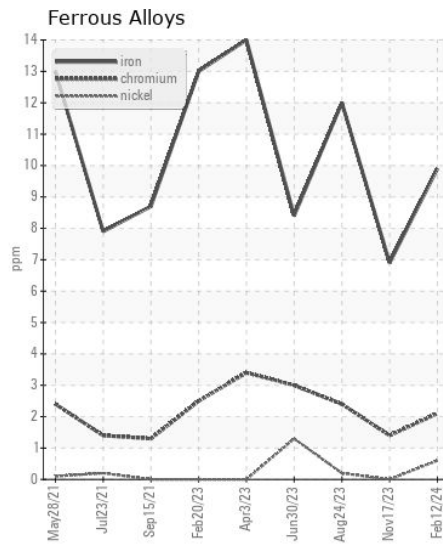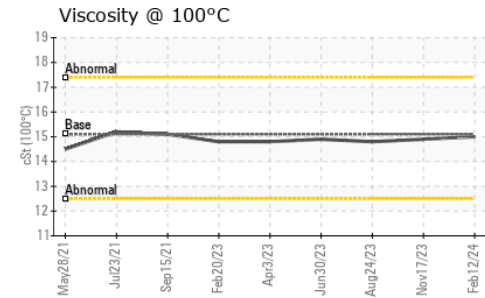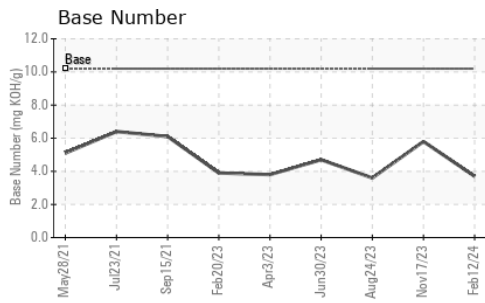

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0081094
Lab Number : 06087990
Unique Number : 10875435
Test Package : FLEET

Received : 13 Feb 2024
Tested : 14 Feb 2024
Diagnosed : 14 Feb 2024 - Wes Davis

GFL Environmental - 884 - Lake County - Tavares
 321 Southridge Industrial Way
 Tavares, FL
 US 32778
 Contact: JEFF COOPERSMITH

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: