



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**DEBORAH MILES**  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 400 SAE 40 (125 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>MW0061822</b>   | MW0058022   | MW0058024   |
| Sample Date    |     | Client Info |           | <b>30 Jan 2024</b> | 20 Dec 2023 | 22 Nov 2023 |
| Machine Age    | hrs | Client Info |           | <b>47150</b>       | 46436       | 45949       |
| Oil Age        | hrs | Client Info |           | <b>1502</b>        | 788         | 301         |
| Filter Age     | hrs | Client Info |           | <b>849</b>         | 135         | 301         |
| Oil Changed    |     | Client Info |           | <b>Not Changd</b>  | Not Changd  | Not Changd  |
| Filter Changed |     | Client Info |           | <b>None</b>        | Not Changd  | Not Changd  |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >75  | <b>6</b>     | 5    | 5    |
| Chromium     | ppm    | ASTM D5185m | >8   | <b>0</b>     | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m | >3   | <b>7</b>     | 7    | 7    |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >15  | <b>2</b>     | 1    | 1    |
| Lead         | ppm    | ASTM D5185m | >18  | <b>&lt;1</b> | 0    | <1   |
| Copper       | ppm    | ASTM D5185m | >80  | <b>4</b>     | 5    | 5    |
| Tin          | ppm    | ASTM D5185m | >14  | <b>&lt;1</b> | <1   | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**







There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >20   | <b>4</b>       | 4     | 5     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>&lt;1</b>   | 1     | 2     |
| Fuel             |          | WC Method   | >4.0  | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.1  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 |       | <b>0.2</b>     | 0.2   | 0.2   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>8.3</b>     | 7.8   | 7.5   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>20.1</b>    | 19.9  | 19.6  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.1  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m | >75  | <b>3</b>     | 2    | 2    |
| Boron            | ppm      | ASTM D5185m |      | <b>254</b>   | 235  | 242  |
| Barium           | ppm      | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m |      | <b>58</b>    | 58   | 59   |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1   |
| Magnesium        | ppm      | ASTM D5185m |      | <b>463</b>   | 459  | 464  |
| Calcium          | ppm      | ASTM D5185m |      | <b>2195</b>  | 2191 | 2214 |
| Phosphorus       | ppm      | ASTM D5185m | 1160 | <b>830</b>   | 779  | 789  |
| Zinc             | ppm      | ASTM D5185m | 1270 | <b>970</b>   | 974  | 975  |
| Sulfur           | ppm      | ASTM D5185m |      | <b>3169</b>  | 3150 | 3193 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>13.9</b>  | 13.6 | 13.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 10.2 | <b>7.9</b>   | 7.9  | 8.3  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.9 | <b>13.9</b>  | 13.8 | 13.9 |

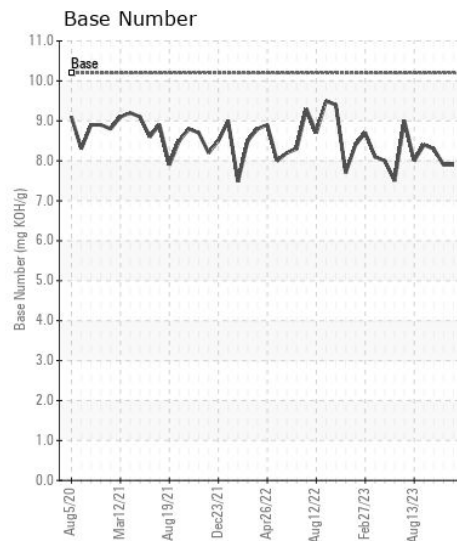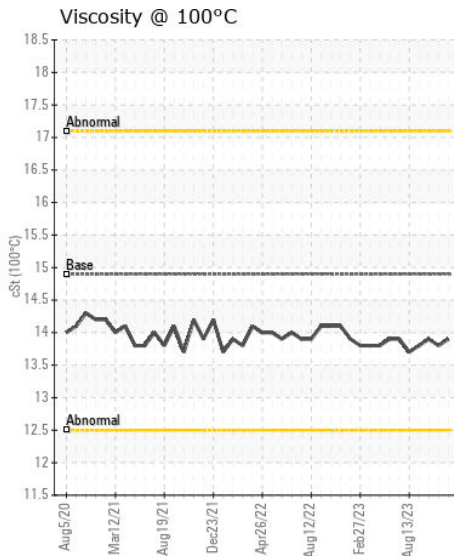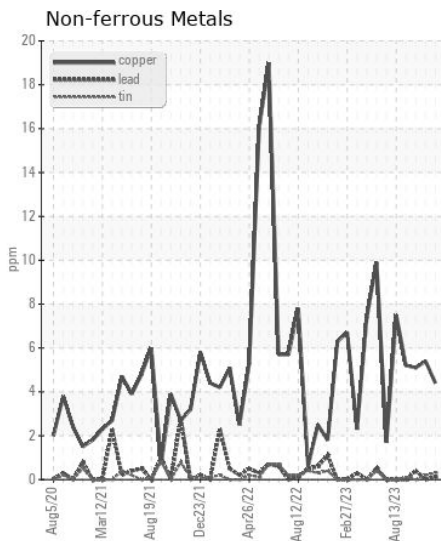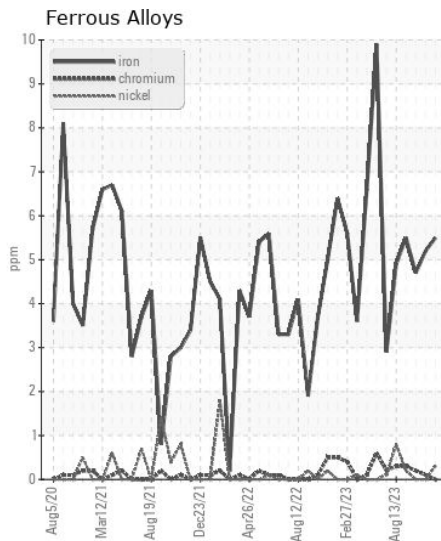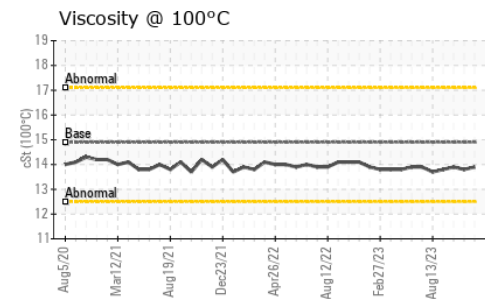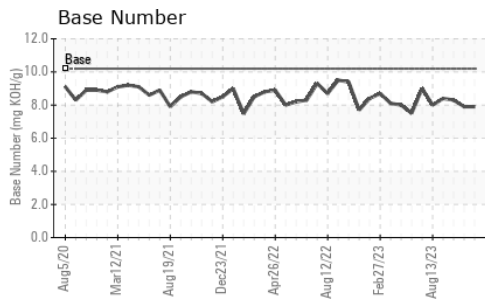

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0061822  
**Lab Number** : 06088010  
**Unique Number** : 10875455  
**Test Package** : MAR 2

**Received** : 13 Feb 2024  
**Tested** : 14 Feb 2024  
**Diagnosed** : 14 Feb 2024 - Wes Davis

**MAGNOLIA MARINE TRANSPORT**  
 697 HAINING ROAD  
 VICKSBURG, MS  
 US 39183  
 Contact: MMT MAINTENANCE PLANNERS  
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: (601)638-8028