



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L180H 38230 (S/N 5603)
Component
Rear Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VKC0001062	VKC0000925	VKC0000788
Sample Date		Client Info		01 Feb 2024	12 Jun 2023	24 Feb 2023
Machine Age	hrs	Client Info		3969	2681	2029
Oil Age	hrs	Client Info		1000	1000	1000
Filter Age	hrs	Client Info		1000	1000	1000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	48	13	15
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>30	2	0	1
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>120	1	0	<1
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	17	11	10
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	1	2
Boron	ppm	ASTM D5185m		133	141	123
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	2
Manganese	ppm	ASTM D5185m		2	<1	2
Magnesium	ppm	ASTM D5185m		21	14	24
Calcium	ppm	ASTM D5185m		4019	3893	3736
Phosphorus	ppm	ASTM D5185m		1395	1279	1174
Zinc	ppm	ASTM D5185m		1715	1584	1557
Sulfur	ppm	ASTM D5185m		4036	4857	4124
Visc @ 40°C	cSt	ASTM D445	55	43.3	43.3	43.3

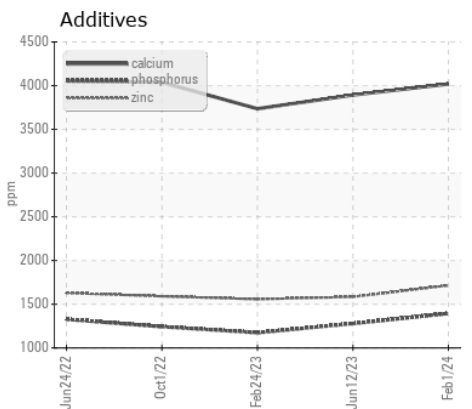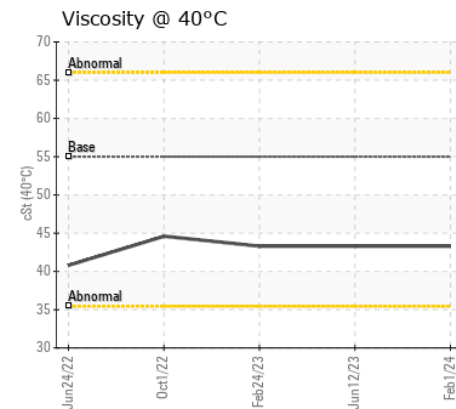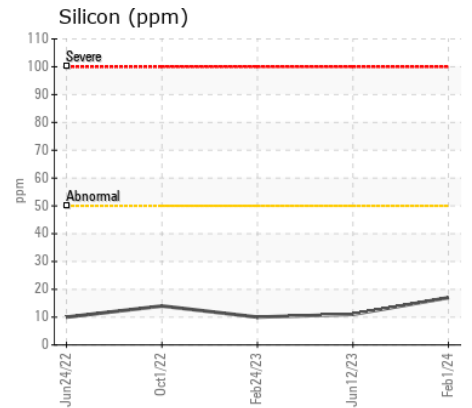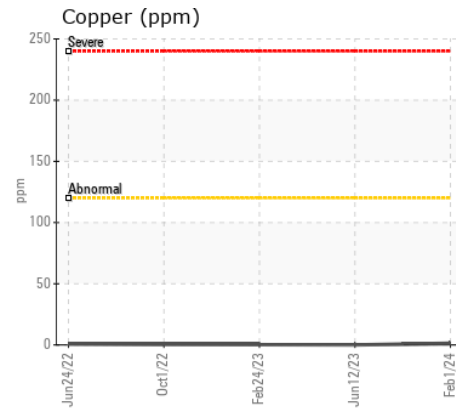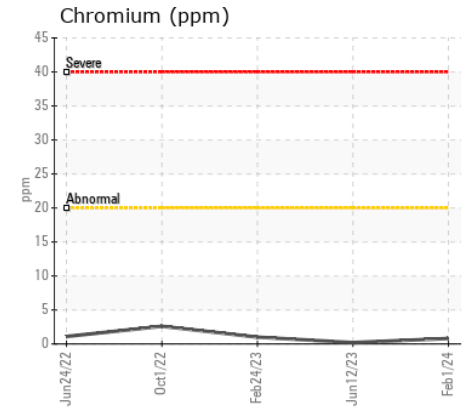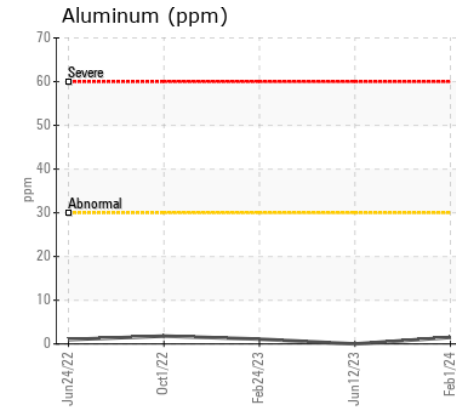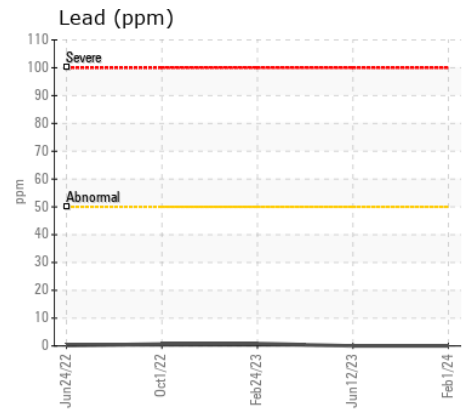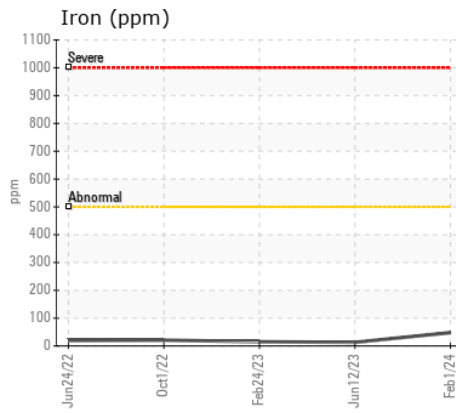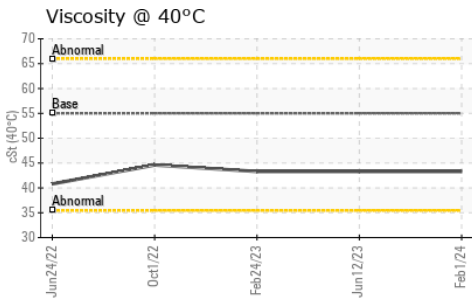

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VKC0001062

Lab Number : 06088376

Unique Number : 10875821

Test Package : MOBCE

Received : 13 Feb 2024

Tested : 14 Feb 2024

Diagnosed : 14 Feb 2024 - Wes Davis

GW VAN KEPPEL CO

1801 NORTH 9TH ST

KANSAS CITY, KS

US 66110

Contact: PAT SAUSE

psause@vankeppel.com

T:

F: (913)281-4815

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)