



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / NEOSHO [68014]
Machine Id
WL111
Component
Transmission (Manual)
Fluid
PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 sampled fluid)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086528	PCA0084710	PCA0086324
Sample Date		Client Info		06 Feb 2024	10 Oct 2023	19 Jun 2023
Machine Age	hrs	Client Info		30222	29750	29243
Oil Age	hrs	Client Info		30222	29750	410
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	4	6	6
Chromium	ppm	ASTM D5185m	>5	0	<1	0
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	<1
Lead	ppm	ASTM D5185m	>45	0	1	0
Copper	ppm	ASTM D5185m	>225	82	146	80
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	5	5	4
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	<1
Boron	ppm	ASTM D5185m	2	2	<1	1
Barium	ppm	ASTM D5185m	0	0	9	14
Molybdenum	ppm	ASTM D5185m	0	<1	2	2
Manganese	ppm	ASTM D5185m	9	<1	0	0
Magnesium	ppm	ASTM D5185m	1	27	23	39
Calcium	ppm	ASTM D5185m	3131	3035	2548	2787
Phosphorus	ppm	ASTM D5185m	1194	1015	899	987
Zinc	ppm	ASTM D5185m	1281	1195	1099	1243
Sulfur	ppm	ASTM D5185m	3811	4009	4347	4757
Visc @ 40°C	cSt	ASTM D445	88.5	86.4	91.9	92.1

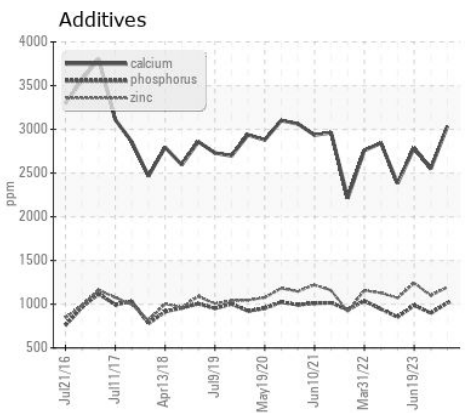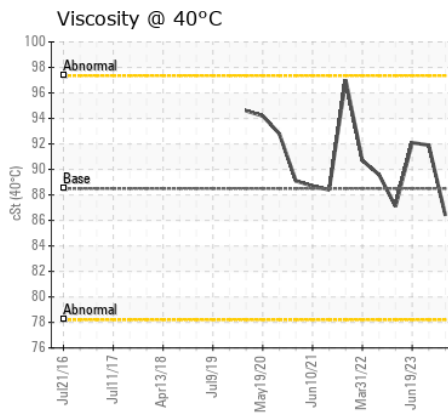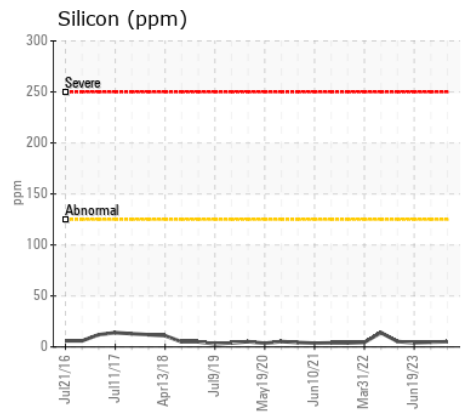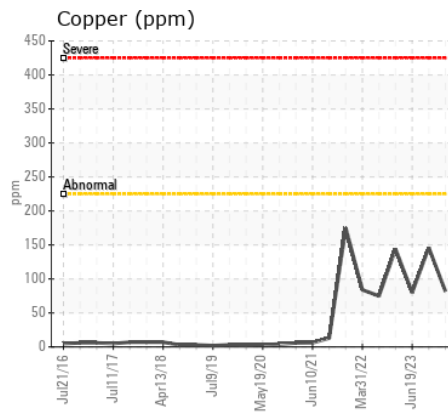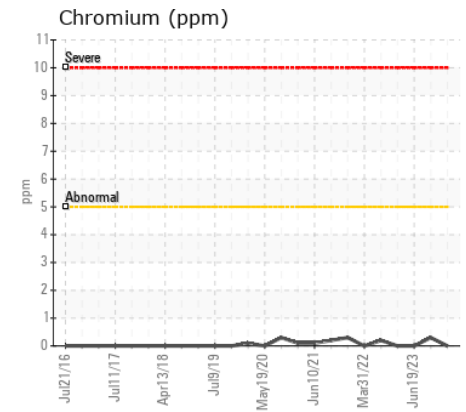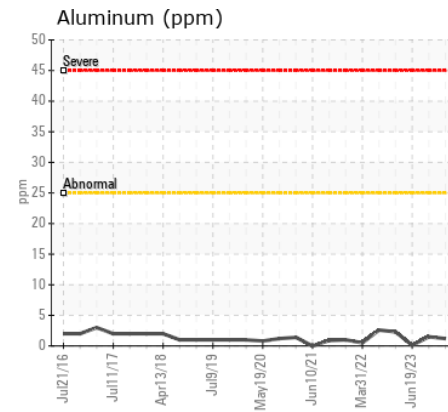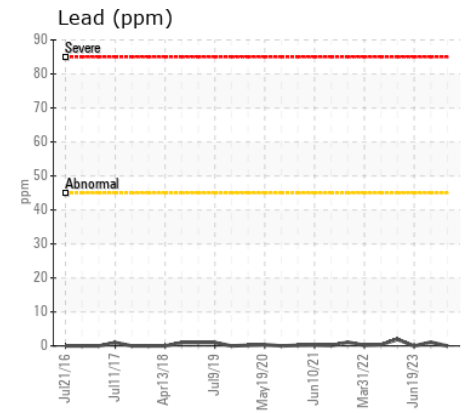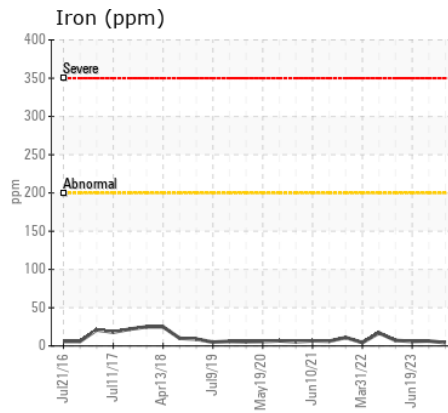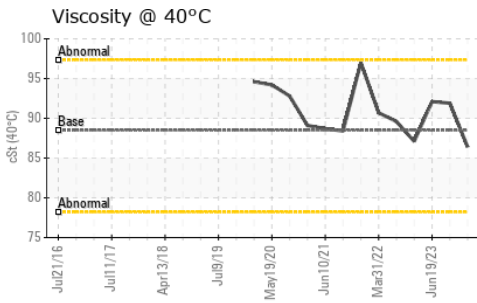

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086528
Lab Number : 06088435
Unique Number : 10875880
Test Package : MOB 1

Received : 13 Feb 2024
Tested : 14 Feb 2024
Diagnosed : 15 Feb 2024 - Sean Felton

Kemp Quarries - Kemp Stone - Neosho
 19148 Ingersol Lane
 Neosho, MO
 US 64850

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: neosho@kempstone.com

T:
F: