



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[12082]
Machine Id
VOLVO A35G 352057
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439456	VCP439463	VCP411851
Sample Date		Client Info		09 Feb 2024	19 Dec 2023	14 Aug 2023
Machine Age	hrs	Client Info		2354	2380	2020
Oil Age	hrs	Client Info		0	0	250
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	5	6	5
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	2
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	2
Aluminum	ppm	ASTM D5185m	>30	2	2	5
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>20	2	▲ 70	3
Tin	ppm	ASTM D5185m	>20	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>20	4	4	5
Potassium	ppm	ASTM D5185m	>20	1	0	2
Fuel	%	ASTM D3524	>3.0	1.5	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.6	7.4	5.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.3	17.0	20.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	0	0	0
Boron	ppm	ASTM D5185m		17	7	58
Barium	ppm	ASTM D5185m		12	0	0
Molybdenum	ppm	ASTM D5185m		29	24	40
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		369	378	448
Calcium	ppm	ASTM D5185m		1643	1852	1640
Phosphorus	ppm	ASTM D5185m		955	1006	927
Zinc	ppm	ASTM D5185m		1046	1162	1108
Sulfur	ppm	ASTM D5185m		3943	3560	3145
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.2	11.1	17.0
Base Number (BN)	mg KOH/g	ASTM D2896		8.2	7.2	9.5
Visc @ 100°C	cSt	ASTM D445		11.9	12.5	12.7

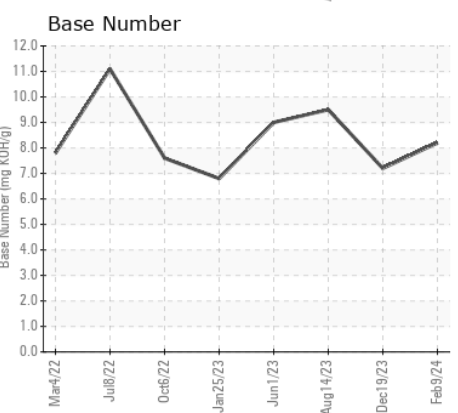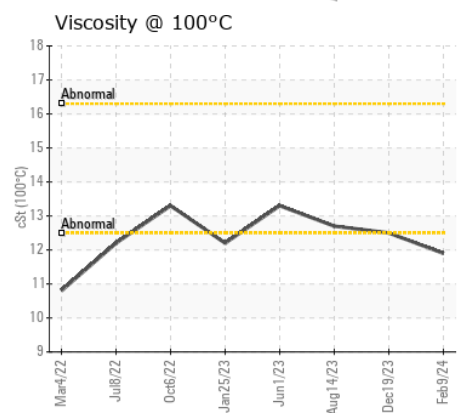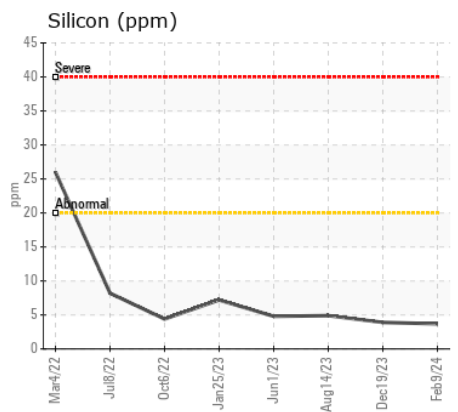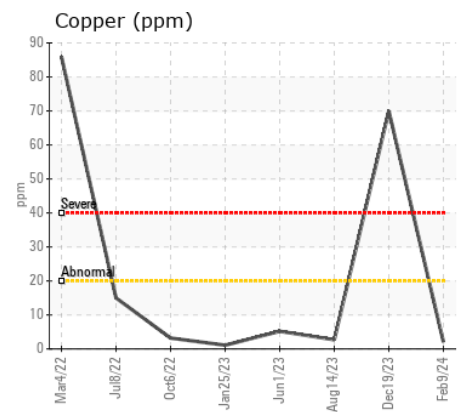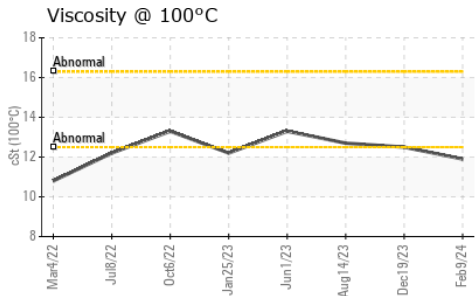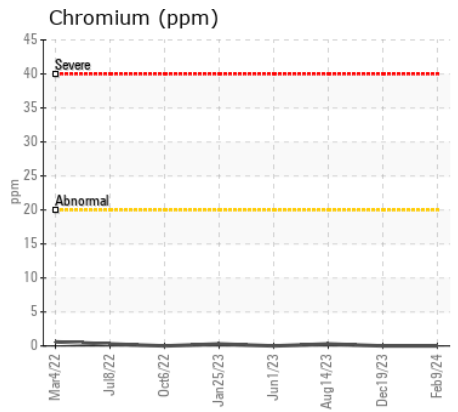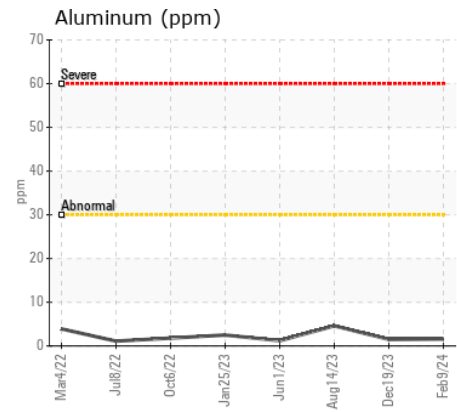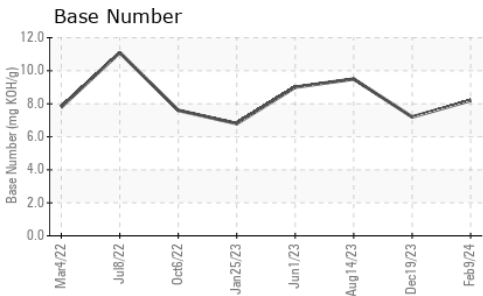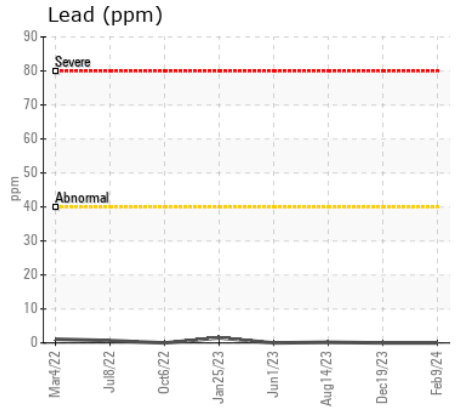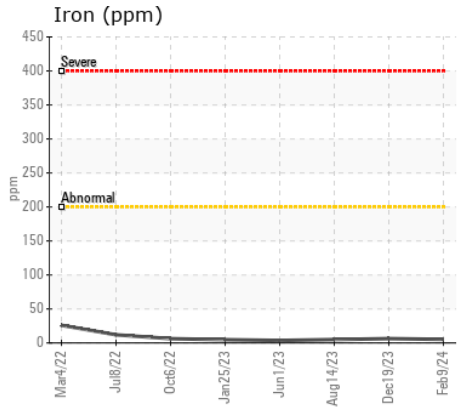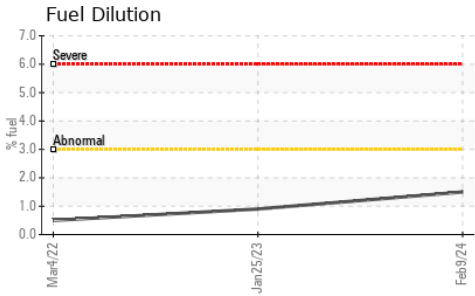

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439456 **Received** : 14 Feb 2024
Lab Number : 06088590 **Tested** : 15 Feb 2024
Unique Number : 10876035 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

JAMES J ANDERSON
 6958 TORRESDALE AVENUE
 PHILADELPHIA, PA
 US 19135
 Contact: JOHN HERBUT
 herb@jjaconstruction.com
 T: (215)850-9051
 F: (215)427-0208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)