



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[A34542]

Machine Id

JOHN DEERE 350G 1FF350GXTJF813297

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0005876	---	---
Sample Date		Client Info		30 Jan 2024	---	---
Machine Age	hrs	Client Info		4808	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

Cylinder, crank, or cam shaft wear is indicated.

Iron	ppm	ASTM D5185m	>51	▲ 109	---	---
Chromium	ppm	ASTM D5185m	>11	3	---	---
Nickel	ppm	ASTM D5185m	>5	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	8	---	---
Lead	ppm	ASTM D5185m	>26	4	---	---
Copper	ppm	ASTM D5185m	>26	19	---	---
Tin	ppm	ASTM D5185m	>4	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	20	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.8	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	0	---	---
Boron	ppm	ASTM D5185m		117	---	---
Barium	ppm	ASTM D5185m		13	---	---
Molybdenum	ppm	ASTM D5185m		230	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		732	---	---
Calcium	ppm	ASTM D5185m		1568	---	---
Phosphorus	ppm	ASTM D5185m		958	---	---
Zinc	ppm	ASTM D5185m		1078	---	---
Sulfur	ppm	ASTM D5185m		3356	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.2	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	---	---

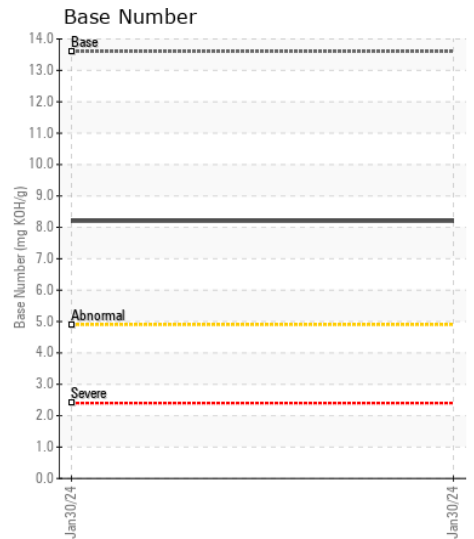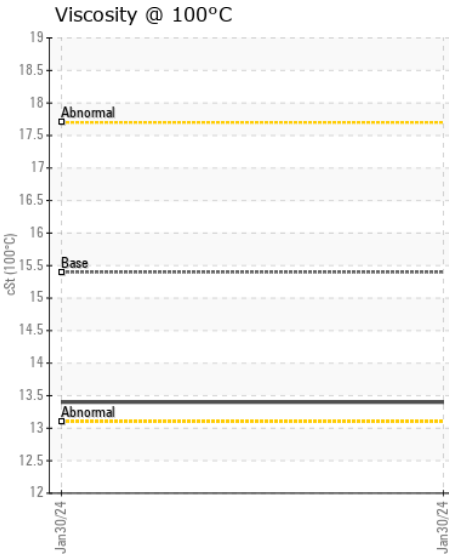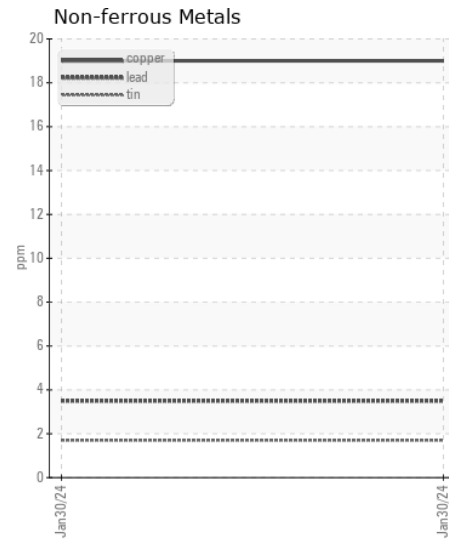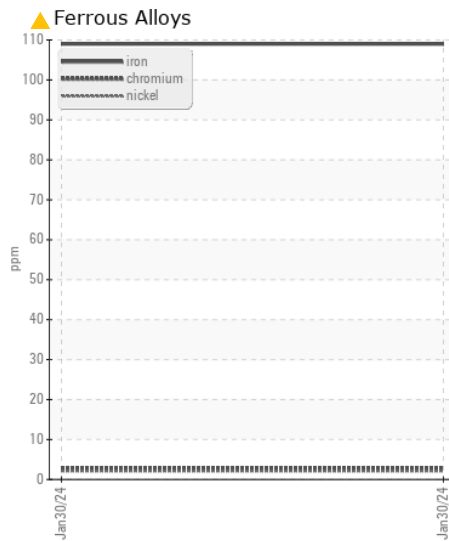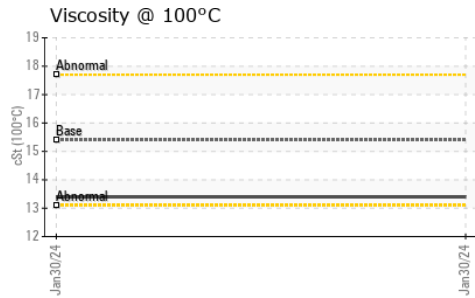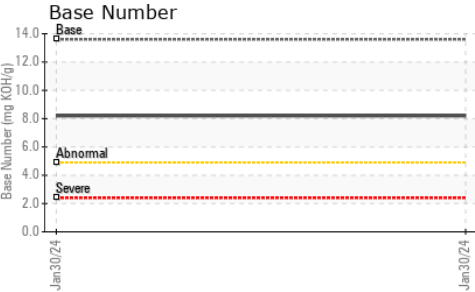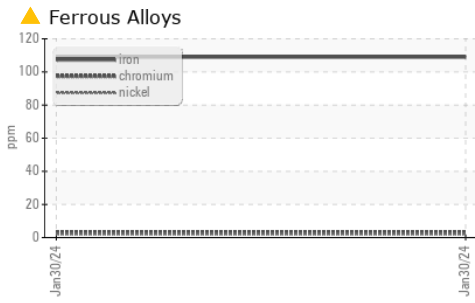

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0005876

Lab Number : 06088621

Unique Number : 10876066

Test Package : CONST (Additional Tests: TBN)

Received : 14 Feb 2024

Tested : 15 Feb 2024

Diagnosed : 15 Feb 2024 - Sean Felton

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE

25135 ONE AVIATION WAY SW

MADISON, AL

US 35756

Contact: HERBERT STONE

WTE013@WARRIORTRACTOR.COM

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)