



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
HITACHI 470LC HCMJAG60A00060467

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0203504 | JR0188387 | JR0171791 |
| Sample Date | | Client Info | | 08 Feb 2024 | 11 Sep 2023 | 18 May 2023 |
| Machine Age | hrs | Client Info | | 10003 | 9498 | 8973 |
| Oil Age | hrs | Client Info | | 505 | 525 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 5 | 28 | 19 |
| Chromium | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | <1 | 4 |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >330 | <1 | 14 | 4 |
| Tin | ppm | ASTM D5185m | >15 | 0 | 2 | 2 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 9 | 9 | 10 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | 2 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0 | 0.3 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 5.4 | 8.5 | 8.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.5 | 22.4 | 22.4 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | | 0 | 2 | <1 |
| Boron | ppm | ASTM D5185m | | 295 | 236 | 246 |
| Barium | ppm | ASTM D5185m | | 13 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 236 | 264 | 248 |
| Manganese | ppm | ASTM D5185m | | 0 | 2 | 2 |
| Magnesium | ppm | ASTM D5185m | | 728 | 924 | 904 |
| Calcium | ppm | ASTM D5185m | | 1257 | 1710 | 1633 |
| Phosphorus | ppm | ASTM D5185m | | 912 | 933 | 971 |
| Zinc | ppm | ASTM D5185m | | 973 | 1186 | 1257 |
| Sulfur | ppm | ASTM D5185m | | 3322 | 3512 | 3864 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.0 | 16.5 | 16.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 9.6 | 8.7 | 9.4 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 14.3 | 13.6 | 13.5 |

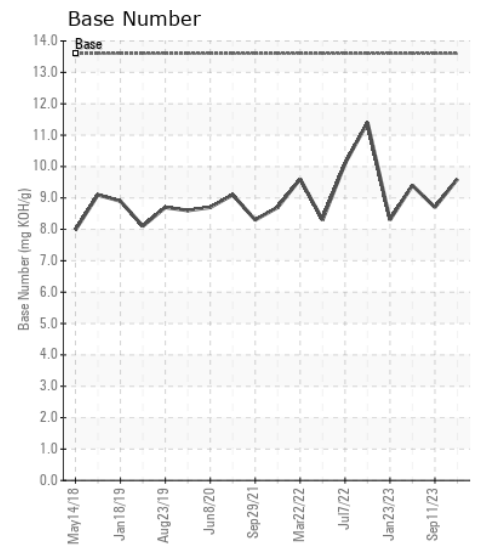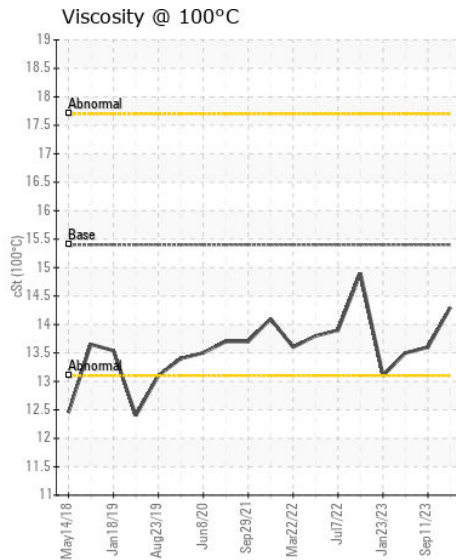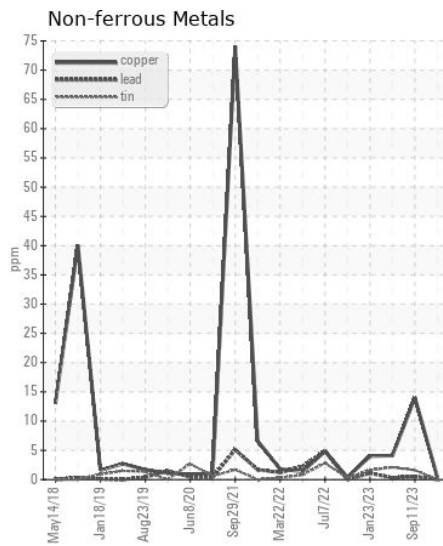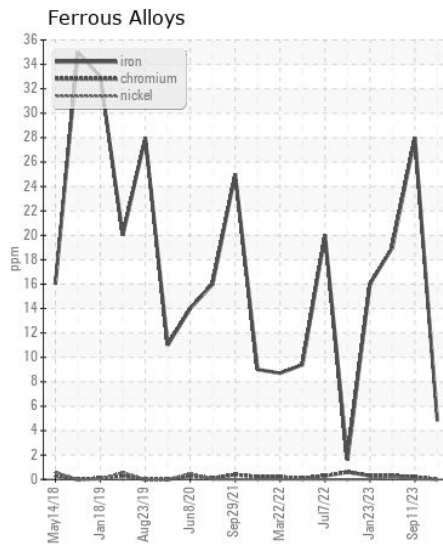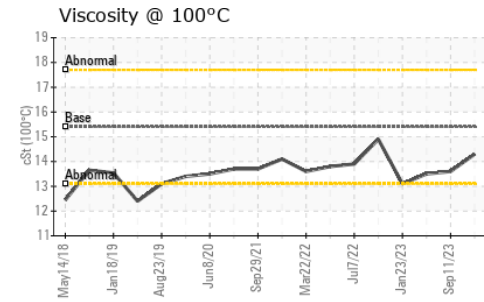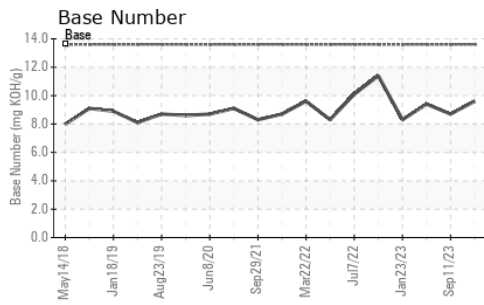

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0203504

Lab Number : 06088622

Unique Number : 10876067

Test Package : CONST (Additional Tests: TBN)

Received : 14 Feb 2024

Tested : 15 Feb 2024

Diagnosed : 15 Feb 2024 - Wes Davis

JRE - CHARLOTTE

9550 STATESVILLE ROAD

CHARLOTTE, NC

US 28269

Contact: CHARLOTTE SHOP

myoung@jamesriverequipment.com

T: (704)597-0211

F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)