



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 724K 1DW724KZLGF674537**

Component  
**Diesel Engine**

Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0203496</b>	JR0203446	JR0143713
Sample Date		Client Info		<b>08 Feb 2024</b>	08 Feb 2024	15 Sep 2022
Machine Age	hrs	Client Info		<b>6898</b>	6898	6603
Oil Age	hrs	Client Info		<b>5904</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Filter Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>41</b>	7	60
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>5	<b>5</b>	0	3
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>3</b>	3	7
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	3
Copper	ppm	ASTM D5185m	>26	<b>1</b>	<1	4
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>6</b>	7	11
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	3	6
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.1	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	5.5	11.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.0</b>	19.6	27.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>0</b>	0	2
Boron	ppm	ASTM D5185m		<b>211</b>	308	43
Barium	ppm	ASTM D5185m		<b>12</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>94</b>	242	236
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>300</b>	708	746
Calcium	ppm	ASTM D5185m		<b>1803</b>	1280	1530
Phosphorus	ppm	ASTM D5185m		<b>966</b>	813	783
Zinc	ppm	ASTM D5185m		<b>1103</b>	1021	1015
Sulfur	ppm	ASTM D5185m		<b>3812</b>	2726	3408
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.6</b>	14.1	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.6</b>	9.7	8.7
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	14.2	13.3

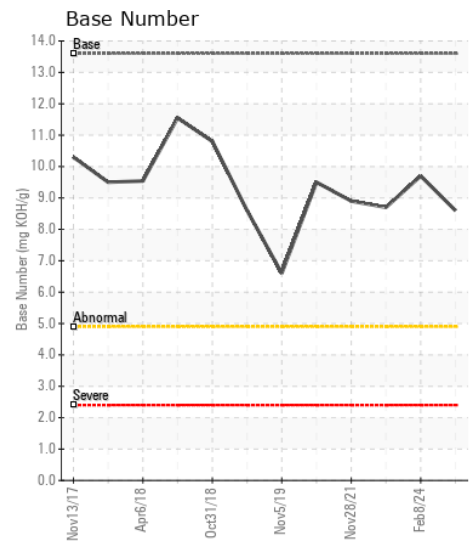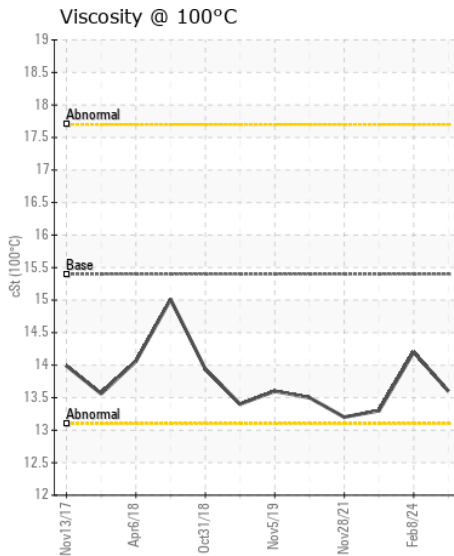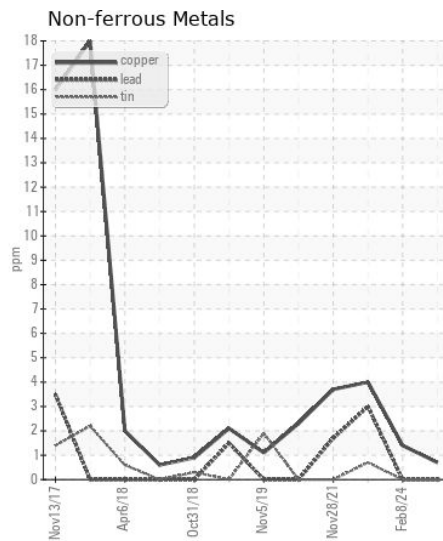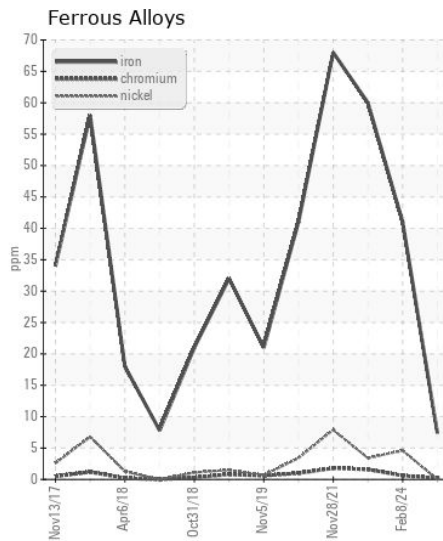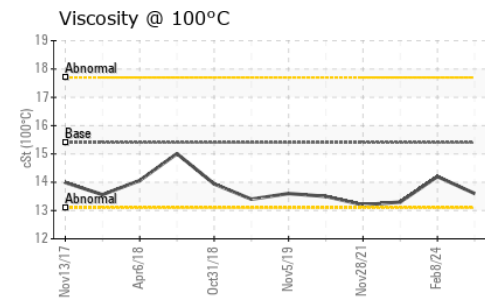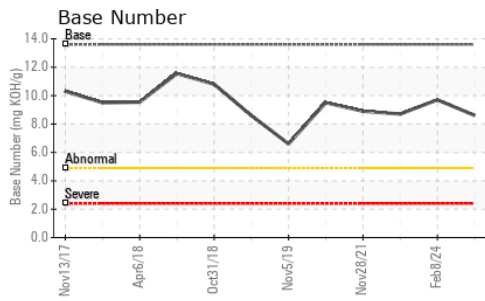

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0203496 **Received** : 14 Feb 2024  
**Lab Number** : 06088633 **Tested** : 15 Feb 2024  
**Unique Number** : 10876078 **Diagnosed** : 15 Feb 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269

Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211  
 F: (704)596-6198