



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HITACHI 470LC HCMJAG60K00061628

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0198281	JR0188807	JR0172192
Sample Date		Client Info		07 Feb 2024	08 Nov 2023	12 Jul 2023
Machine Age	hrs	Client Info		3072	2700	2065
Oil Age	hrs	Client Info		372	635	1465
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	15	21
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	2
Aluminum	ppm	ASTM D5185m	>20	3	5	4
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	2	4	4
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	9	9
Potassium	ppm	ASTM D5185m	>20	2	2	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.8	8.7	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	22.4	19.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	0	<1	3
Boron	ppm	ASTM D5185m	250	215	151	18
Barium	ppm	ASTM D5185m	10	13	7	3
Molybdenum	ppm	ASTM D5185m	100	229	199	99
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	813	733	1229
Calcium	ppm	ASTM D5185m	3000	1367	1668	1424
Phosphorus	ppm	ASTM D5185m	1150	990	1038	1308
Zinc	ppm	ASTM D5185m	1350	1086	1291	1618
Sulfur	ppm	ASTM D5185m	4250	3495	3805	4169
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	17.3	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.6	8.7	9.4
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	13.9	13.0

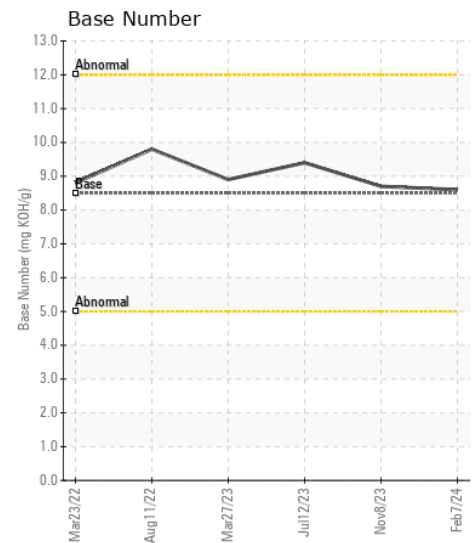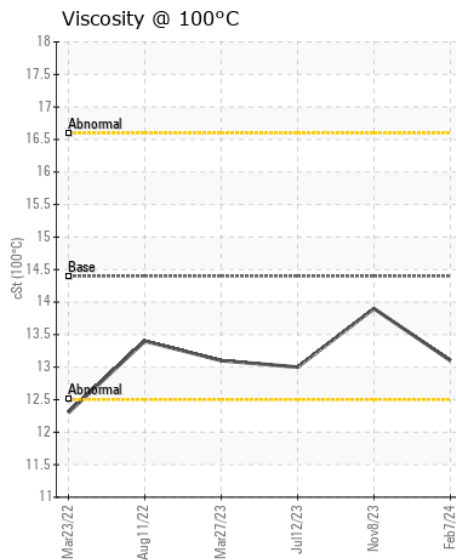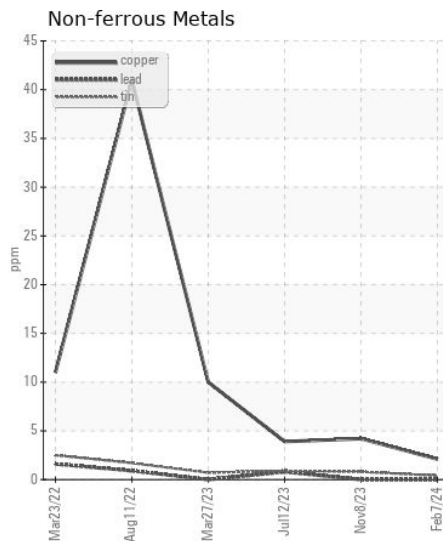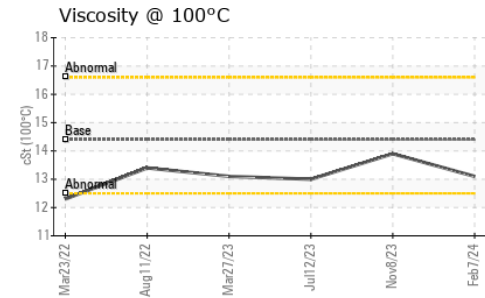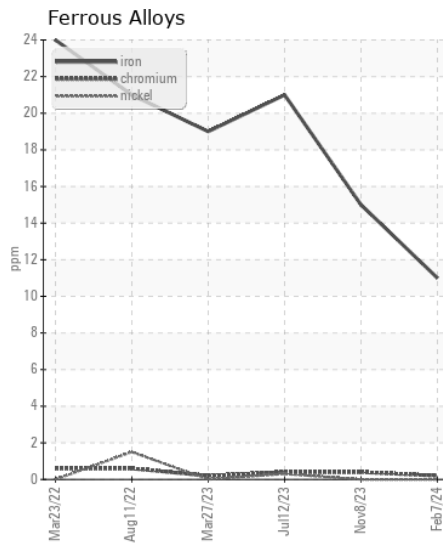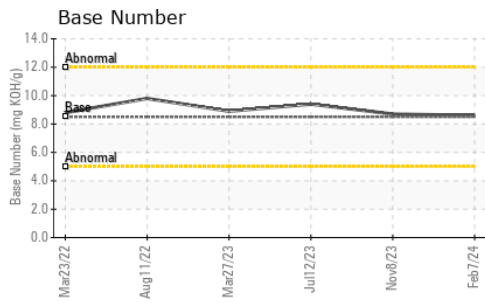

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0198281 **Received** : 14 Feb 2024
Lab Number : 06088635 **Tested** : 15 Feb 2024
Unique Number : 10876080 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198