



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624L 624L UNIT 11

Component
Hydraulic System

Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0003788	PE0003890	PE0002521
Sample Date		Client Info		08 Feb 2024	15 Jan 2024	08 Dec 2023
Machine Age	hrs	Client Info		9962	9671	9386
Oil Age	hrs	Client Info		9671	9386	9088
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	7	8	8
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	7	6	8
Copper	ppm	ASTM D5185m	>75	2	3	2
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	4	7	4
Potassium	ppm	ASTM D5185m	>20	<1	<1	4
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	1562	---	4188
Particles >6µm		ASTM D7647	>1300	331	---	526
Particles >14µm		ASTM D7647	>160	40	---	28
Particles >21µm		ASTM D7647	>40	13	---	7
Particles >38µm		ASTM D7647	>10	1	---	1
Particles >71µm		ASTM D7647	>3	0	---	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	---	19/16/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	1	1
Boron	ppm	ASTM D5185m	10	5	5	6
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	10	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	13	14	14
Calcium	ppm	ASTM D5185m	3500	2058	1935	2036
Phosphorus	ppm	ASTM D5185m	1150	905	818	882
Zinc	ppm	ASTM D5185m	1150	1058	961	1031
Sulfur	ppm	ASTM D5185m	5000	3095	2793	3097
Acid Number (AN)	mg KOH/g	ASTM D8045	2.25	1.00	1.02	0.99
Visc @ 40°C	cSt	ASTM D445	48	47.0	47.2	47.3

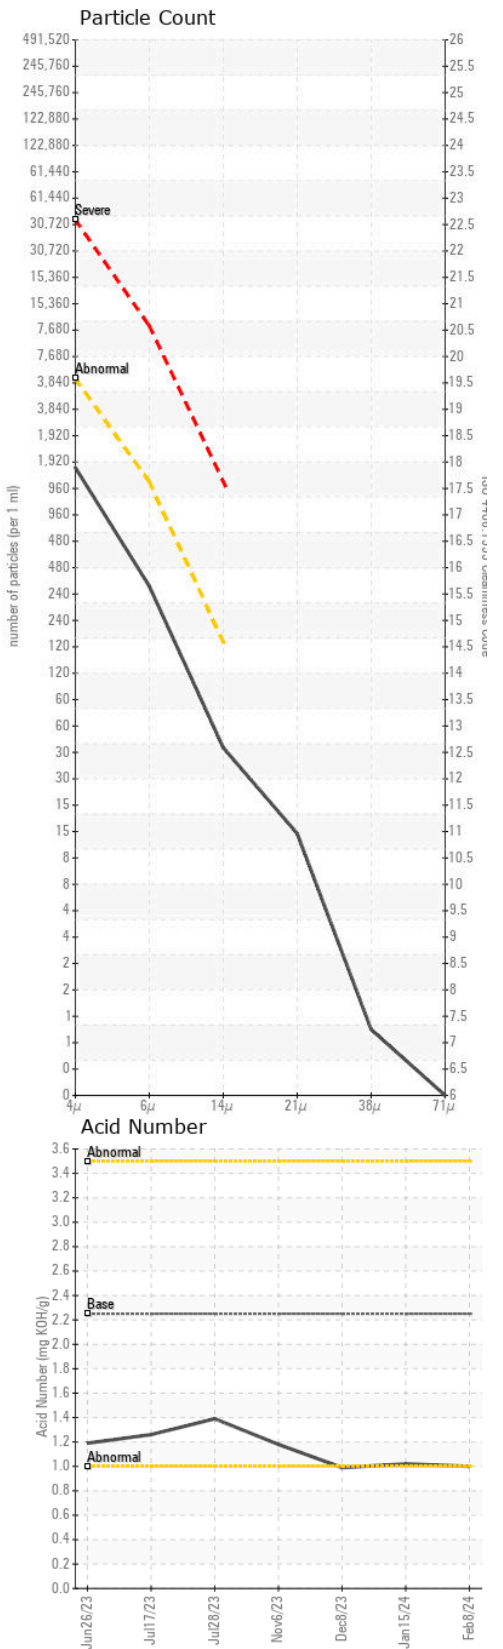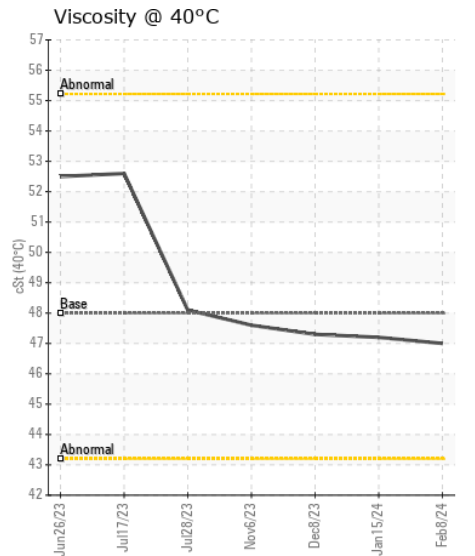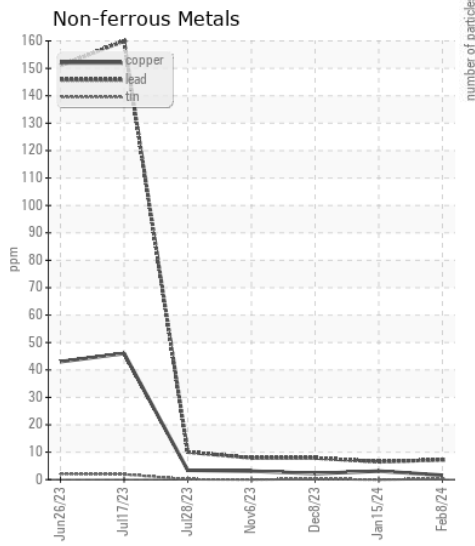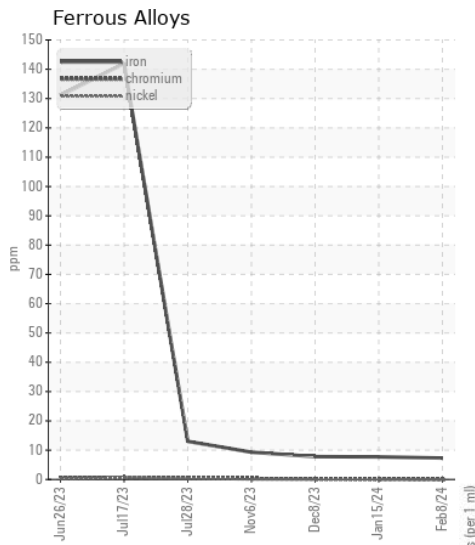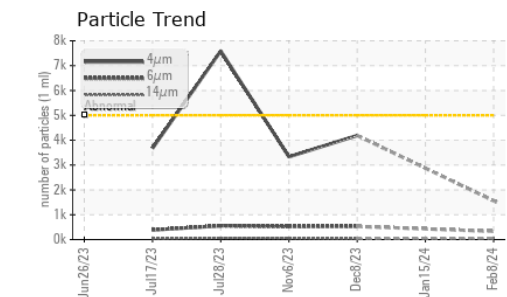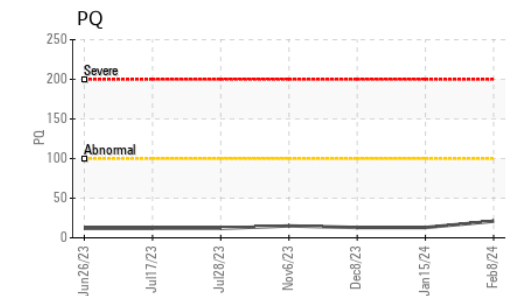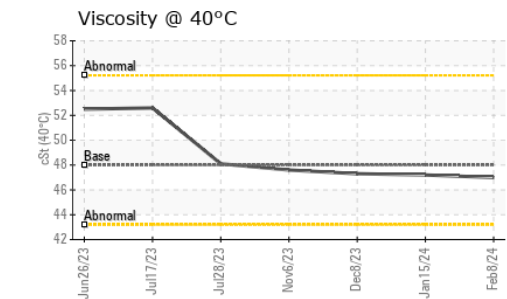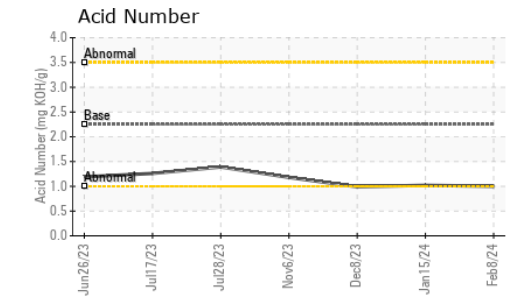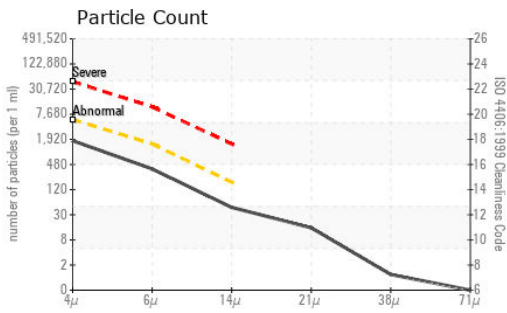

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003788 **Received** : 14 Feb 2024
Lab Number : 06088669 **Tested** : 15 Feb 2024
Unique Number : 10876114 **Diagnosed** : 15 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MORNING STAR DAIRY
 801 FM 694
 DALHART, TX
 US 79022
 Contact: JOHN DEVRIES
 johndevries@gmail.com

T:
F: