



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 410E-II 1DW410ELJMF710562**

Component  
**Hydraulic System**

Fluid  
**JOHN DEERE HYDRAU (46 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0203448</b>	JR0203458	JR0203449
Sample Date		Client Info		<b>12 Feb 2024</b>	12 Feb 2024	12 Feb 2024
Machine Age	hrs	Client Info		<b>3711</b>	3712	3711
Oil Age	hrs	Client Info		<b>3711</b>	3712	3711
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184	>50	<b>13</b>	11	12
Iron	ppm	ASTM D5185m	>71	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>6	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>13	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>21	<b>0</b>	0	0
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>24	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>80000	<b>588</b>	7403	1394
Particles >6µm		ASTM D7647	>5000	<b>61</b>	311	30
Particles >14µm		ASTM D7647	>640	<b>11</b>	16	4
Particles >21µm		ASTM D7647	>160	<b>4</b>	4	3
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	<b>16/13/11</b>	20/15/11	18/12/9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>0</b>	<1	<1
Boron	ppm	ASTM D5185m		<b>0</b>	1	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>2</b>	8	5
Calcium	ppm	ASTM D5185m	87	<b>118</b>	115	122
Phosphorus	ppm	ASTM D5185m	727	<b>676</b>	676	674
Zinc	ppm	ASTM D5185m	900	<b>892</b>	892	897
Sulfur	ppm	ASTM D5185m	1500	<b>1708</b>	1719	1713
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.72</b>	0.78	0.82
Visc @ 40°C	cSt	ASTM D445	65	<b>62.9</b>	62.3	62.3

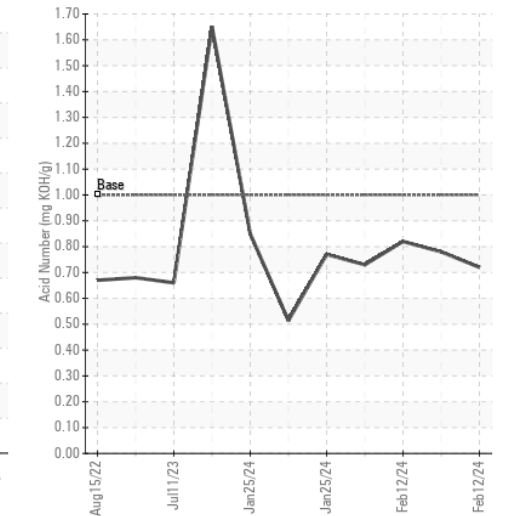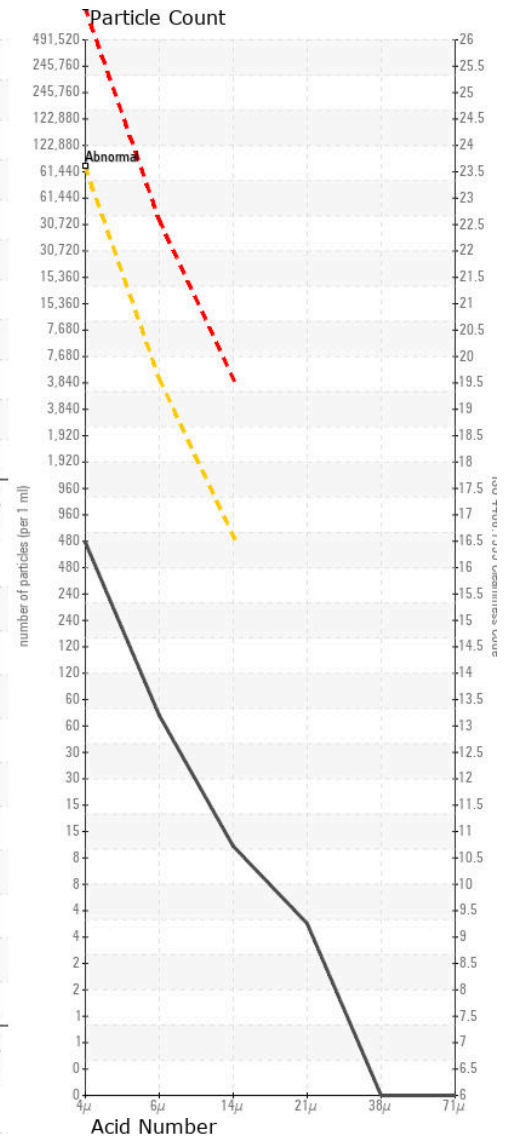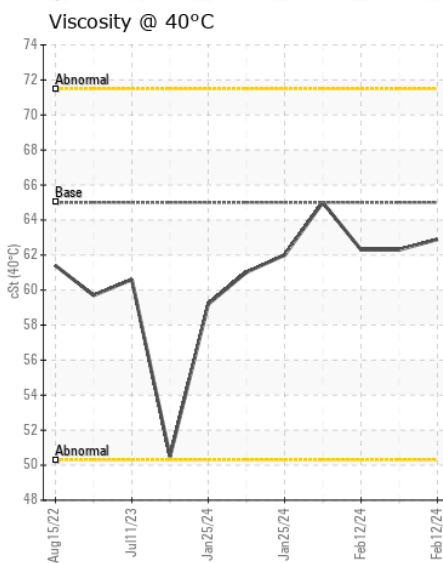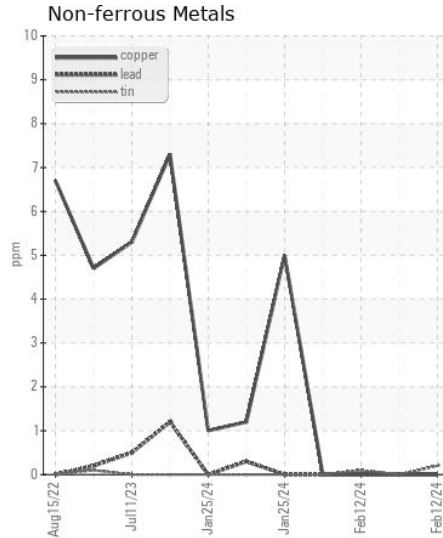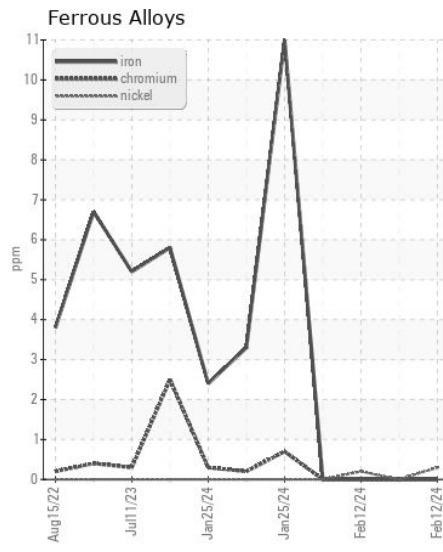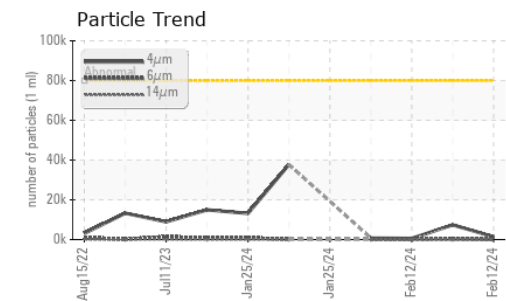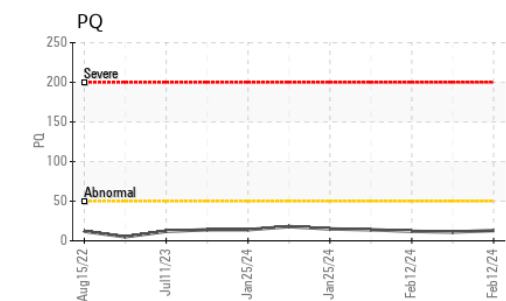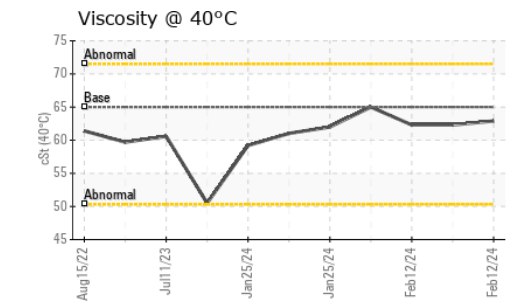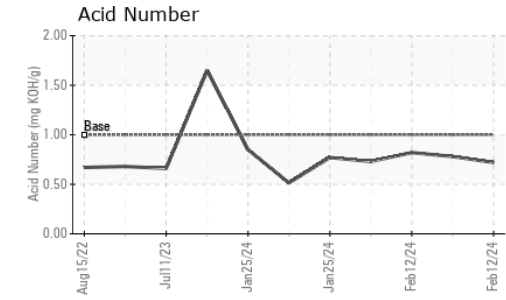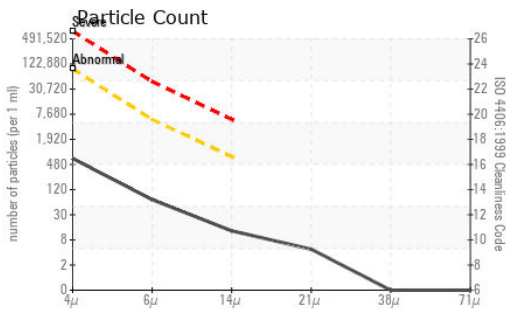

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0203448

Lab Number : 06088693

Unique Number : 10876138

Test Package : CONST ( Additional Tests: PQ )

Received : 14 Feb 2024

Tested : 15 Feb 2024

Diagnosed : 15 Feb 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE

9550 STATESVILLE ROAD

CHARLOTTE, NC

US 28269

Contact: CHARLOTTE SHOP

myoung@jamesriverequipment.com

T: (704)597-0211

F: (704)596-6198