



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**DEERE 10552**  
 Component  
**1 Transmission (Manual)**  
 Fluid  
**TDTO FLUID SAE 10W (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDTO FLUID SAE 10W. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0198320</b>	---	---
Sample Date		Client Info		<b>13 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5028</b>	---	---
Oil Age	hrs	Client Info		<b>5028</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>17</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>24</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>7	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>45	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>16</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>8</b>	---	---
Boron	ppm	ASTM D5185m	37	<b>26</b>	---	---
Barium	ppm	ASTM D5185m	7	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	5	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	40	<b>75</b>	---	---
Calcium	ppm	ASTM D5185m	2650	<b>3028</b>	---	---
Phosphorus	ppm	ASTM D5185m	1050	<b>903</b>	---	---
Zinc	ppm	ASTM D5185m	1075	<b>1200</b>	---	---
Sulfur	ppm	ASTM D5185m	5750	<b>3768</b>	---	---
Visc @ 40°C	cSt	ASTM D445	40	<b>47.9</b>	---	---

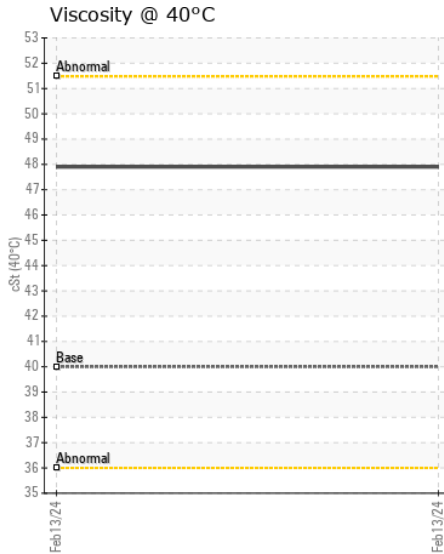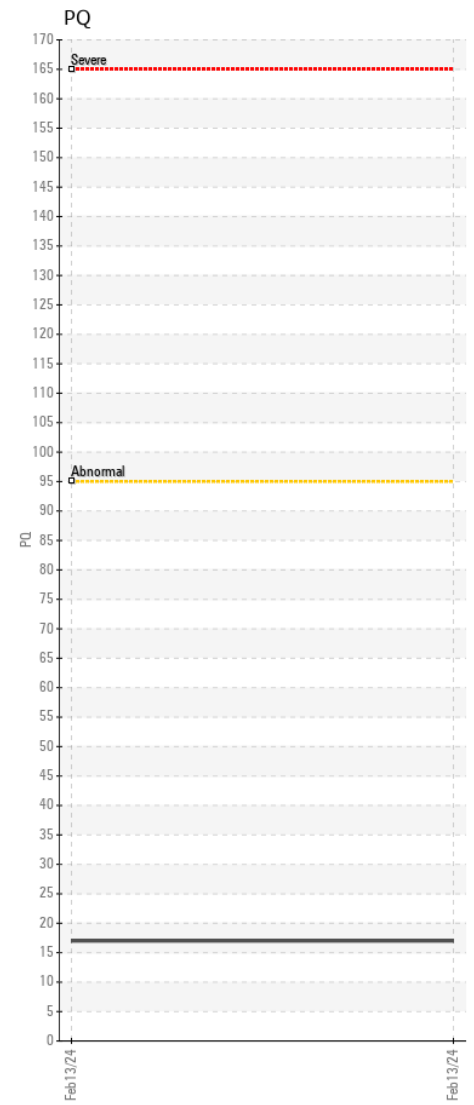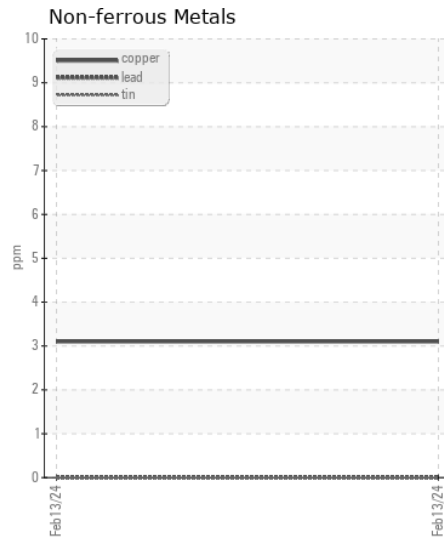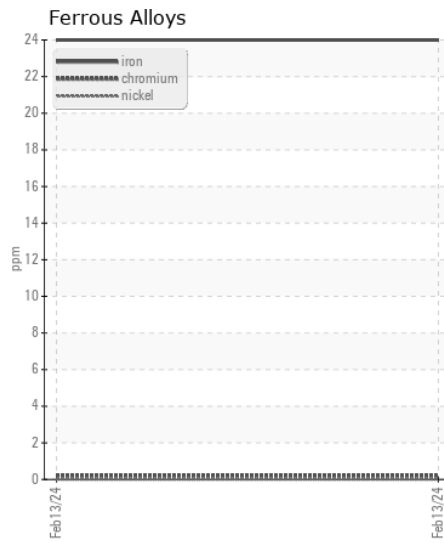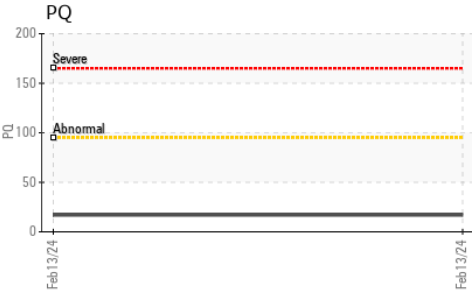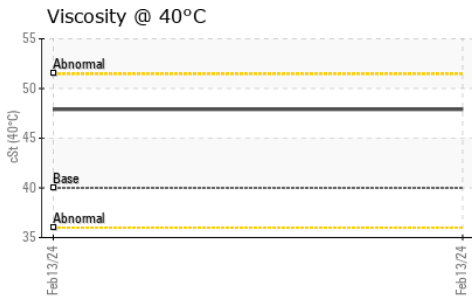

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0198320 **Received** : 14 Feb 2024  
**Lab Number** : 06089031 **Tested** : 15 Feb 2024  
**Unique Number** : 10876476 **Diagnosed** : 15 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: Ray Benson  
 ray.benson@jamesriverequipment.com  
 T:  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)