



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W64130]
 Machine Id
JOHN DEERE 624K 1DW624KZPJF689064
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (28 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W64130)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203495	JR0171064	JR0155933
Sample Date		Client Info		08 Feb 2024	18 Jul 2023	26 Feb 2023
Machine Age	hrs	Client Info		6007	5401	4481
Oil Age	hrs	Client Info		5087	920	500
Filter Age	hrs	Client Info		0	920	500
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	12	14
Iron	ppm	ASTM D5185m	>71	18	15	12
Chromium	ppm	ASTM D5185m	>11	0	7	6
Nickel	ppm	ASTM D5185m	>6	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>11	1	1	2
Lead	ppm	ASTM D5185m	>13	<1	<1	<1
Copper	ppm	ASTM D5185m	>21	10	1	<1
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>24	6	4	3
Potassium	ppm	ASTM D5185m	>20	0	2	1
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	9459	5130	792
Particles >6µm		ASTM D7647	>5000	876	1763	193
Particles >14µm		ASTM D7647	>640	11	174	20
Particles >21µm		ASTM D7647	>160	1	41	3
Particles >38µm		ASTM D7647	>40	0	1	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	20/17/11	20/18/15	17/15/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	3	0	<1
Boron	ppm	ASTM D5185m		1	2	2
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	3	3
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		85	12	11
Calcium	ppm	ASTM D5185m	87	3083	114	101
Phosphorus	ppm	ASTM D5185m	727	885	541	543
Zinc	ppm	ASTM D5185m	900	1184	733	768
Sulfur	ppm	ASTM D5185m	1500	3204	1454	1481
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	1.751	0.54	0.52
Visc @ 40°C	cSt	ASTM D445	65	53.7	58.6	59.5

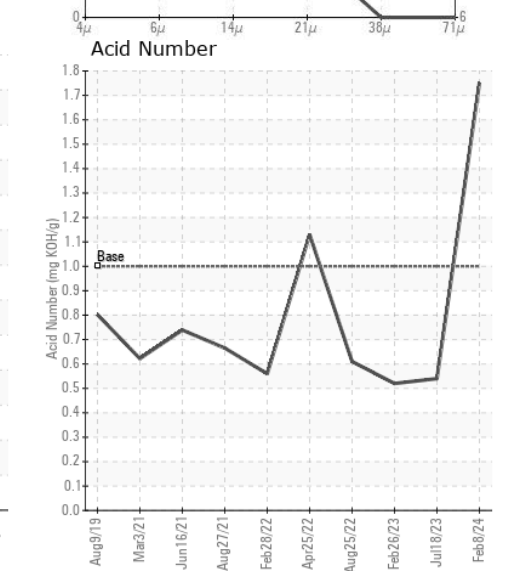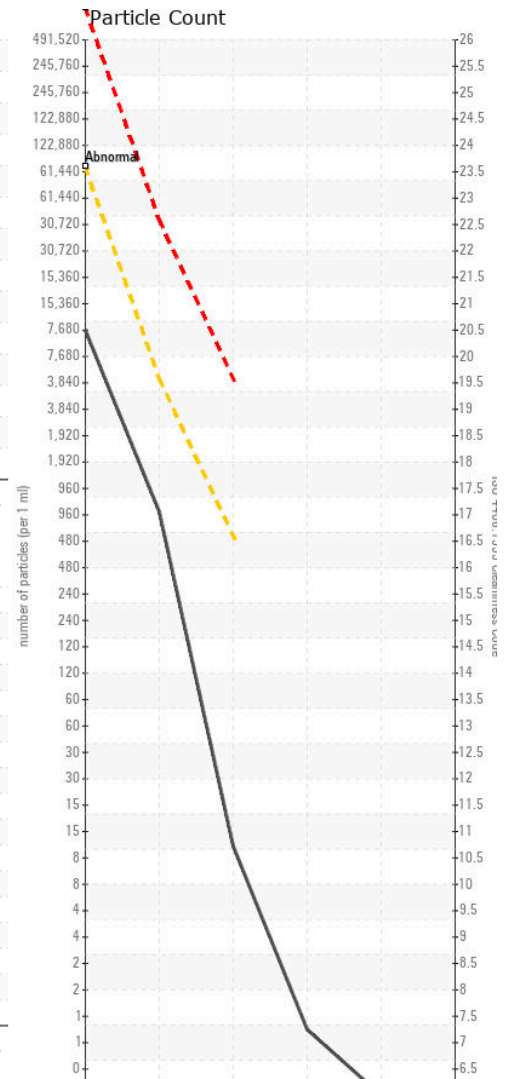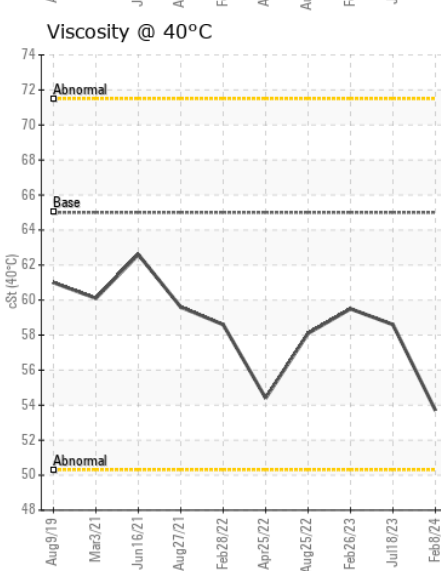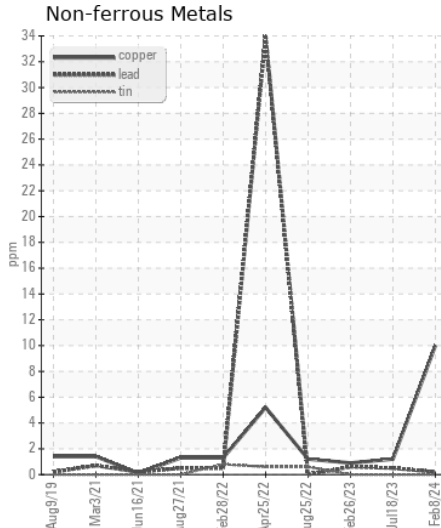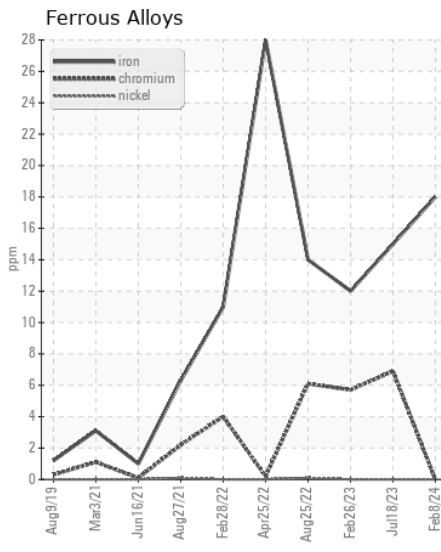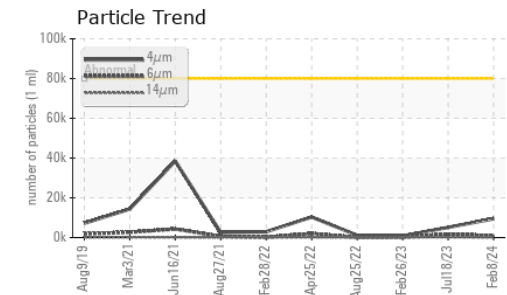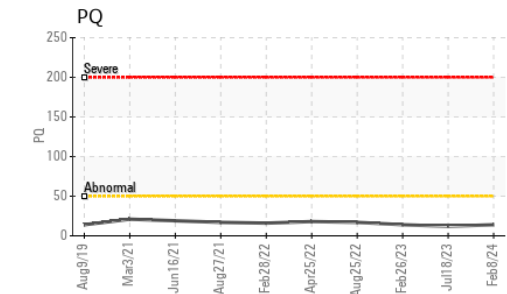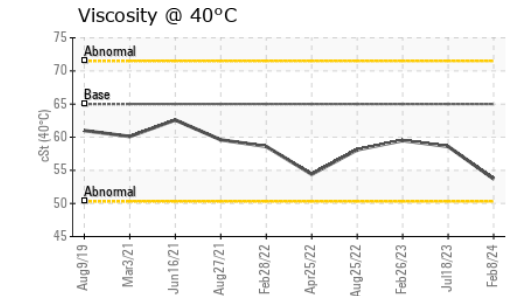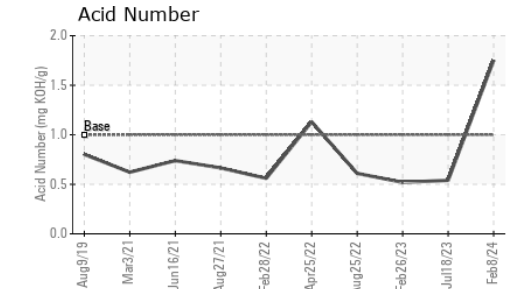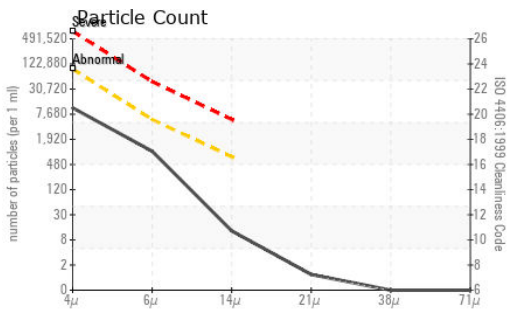

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203495 **Received** : 14 Feb 2024
Lab Number : 06089035 **Tested** : 19 Feb 2024
Unique Number : 10876480 **Diagnosed** : 19 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)