



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 410E 1DW410EBKNF715204**

Component  
**Rear Differential**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (14 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0201113</b>	JR0193643	JR0176497
Sample Date		Client Info		<b>09 Feb 2024</b>	20 Nov 2023	29 Aug 2023
Machine Age	hrs	Client Info		<b>4258</b>	3588	3042
Oil Age	hrs	Client Info		<b>4258</b>	3588	3042
Filter Age	hrs	Client Info		<b>670</b>	546	500
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>13</b>	14	16
Iron	ppm	ASTM D5185m	>500	<b>27</b>	17	17
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>100	<b>12</b>	9	7
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>4</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	2
Boron	ppm	ASTM D5185m	6	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>14</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	145	<b>97</b>	96	102
Calcium	ppm	ASTM D5185m	3570	<b>3445</b>	3421	3544
Phosphorus	ppm	ASTM D5185m	1290	<b>1101</b>	1027	1003
Zinc	ppm	ASTM D5185m	1640	<b>1211</b>	1218	1249
Sulfur	ppm	ASTM D5185m		<b>4220</b>	3414	4187
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.4</b>	51.7	52.8

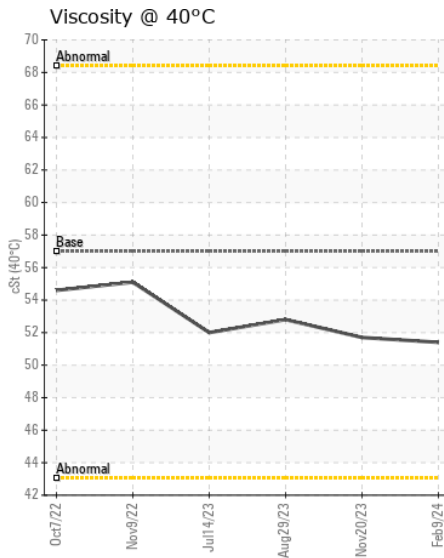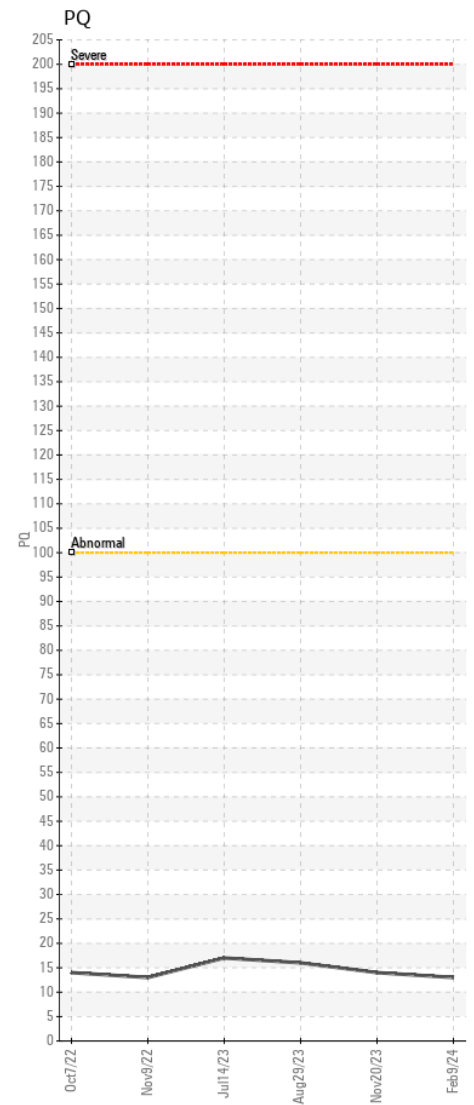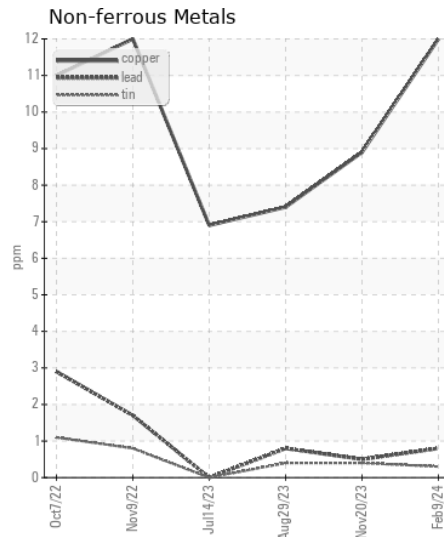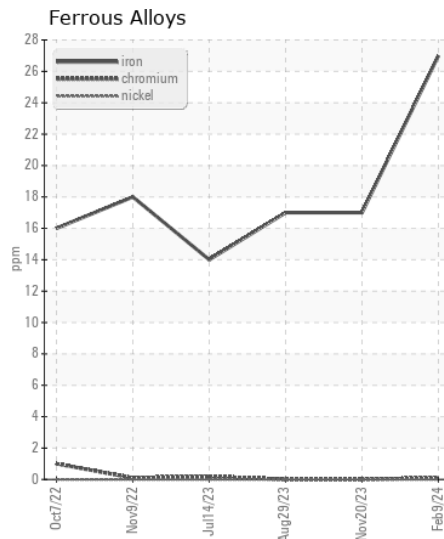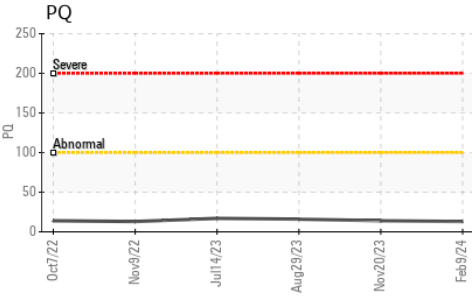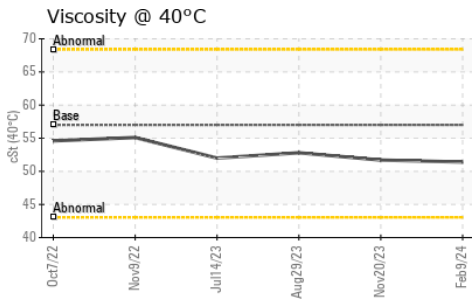

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0201113 **Received** : 14 Feb 2024  
**Lab Number** : 06089067 **Tested** : 15 Feb 2024  
**Unique Number** : 10876512 **Diagnosed** : 15 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - NEW BERN**  
 3816 MARTIN LUTHER KING BLVD  
 NEW BERN, NC  
 US 28562  
 Contact: NEW BERN SHOP  
 nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: