



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410EBKNF715204
Component
Front Differential
Fluid
JOHN DEERE HY-GARD HYD/TRANS (14 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201114	JR0193642	JR0176495
Sample Date		Client Info		09 Feb 2024	20 Nov 2023	29 Aug 2023
Machine Age	hrs	Client Info		4258	3588	3042
Oil Age	hrs	Client Info		4258	1588	3042
Filter Age	hrs	Client Info		500	588	500
Oil Changed		Client Info		Changed	Not Chngd	Not Chngd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		14	15	18
Iron	ppm	ASTM D5185m	>500	26	17	26
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	3
Lead	ppm	ASTM D5185m	>25	9	9	10
Copper	ppm	ASTM D5185m	>100	5	4	5
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	3	4
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	4
Boron	ppm	ASTM D5185m	6	0	<1	4
Barium	ppm	ASTM D5185m	0	14	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	145	66	69	98
Calcium	ppm	ASTM D5185m	3570	3272	3245	3472
Phosphorus	ppm	ASTM D5185m	1290	1087	1020	1007
Zinc	ppm	ASTM D5185m	1640	1201	1210	1230
Sulfur	ppm	ASTM D5185m		4318	3596	4483
Visc @ 40°C	cSt	ASTM D445	57.0	59.3	60.3	53.7

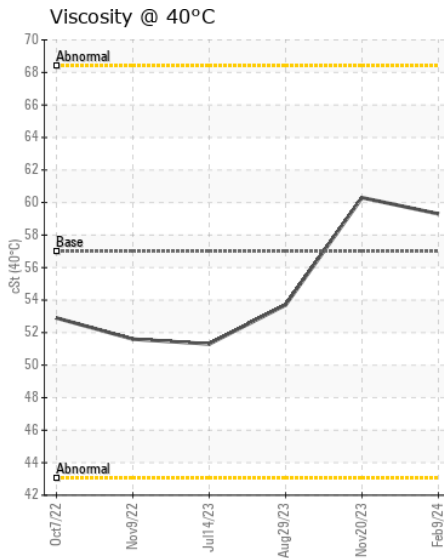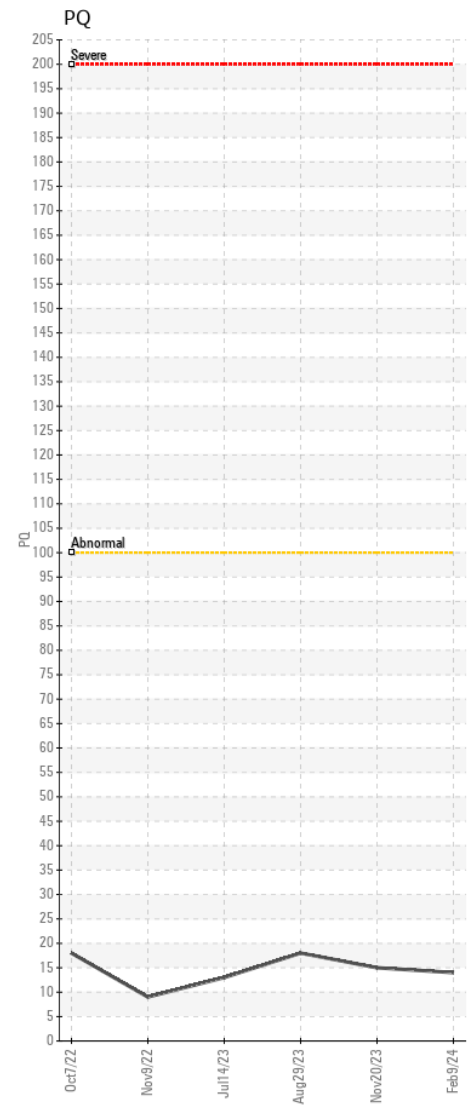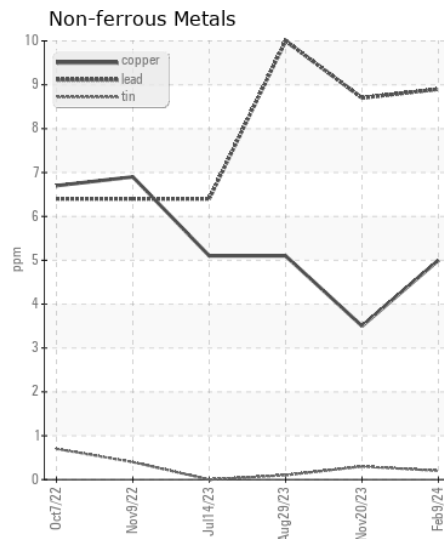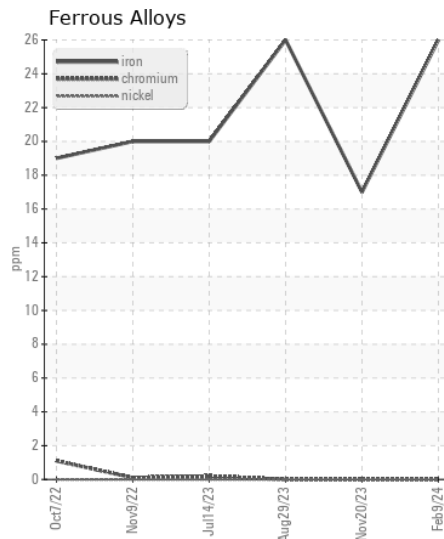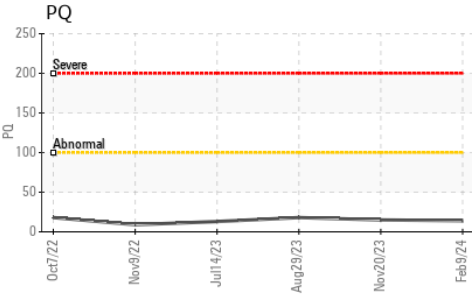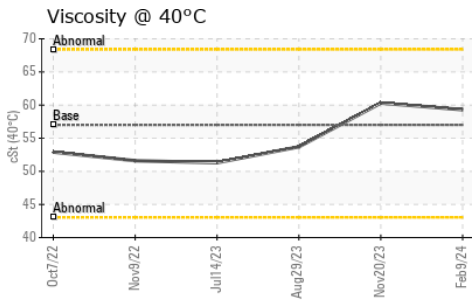

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0201114 **Received** : 14 Feb 2024
Lab Number : 06089069 **Tested** : 15 Feb 2024
Unique Number : 10876514 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP
 nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: