



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAHNF000281

Component
Pump Drive

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0202193	JR0190722	---
Sample Date		Client Info		13 Feb 2024	13 Nov 2023	---
Machine Age	hrs	Client Info		1551	1091	---
Oil Age	hrs	Client Info		460	1091	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		11	14	---
Iron	ppm	ASTM D5185m	>151	3	14	---
Chromium	ppm	ASTM D5185m	>11	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>21	2	2	---
Lead	ppm	ASTM D5185m	>51	0	0	---
Copper	ppm	ASTM D5185m	>51	<1	0	---
Tin	ppm	ASTM D5185m	>4	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	8	7	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	0	<1	---
Boron	ppm	ASTM D5185m		297	262	---
Barium	ppm	ASTM D5185m		13	0	---
Molybdenum	ppm	ASTM D5185m		249	234	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		756	765	---
Calcium	ppm	ASTM D5185m		1272	1297	---
Phosphorus	ppm	ASTM D5185m		961	879	---
Zinc	ppm	ASTM D5185m		1013	1020	---
Sulfur	ppm	ASTM D5185m		4271	3493	---
Visc @ 40°C	cSt	ASTM D445		118	118	---

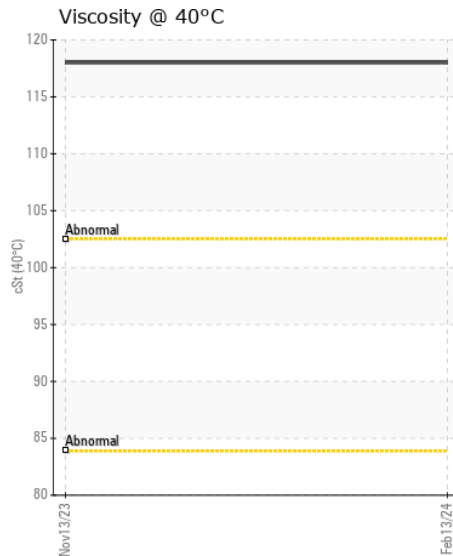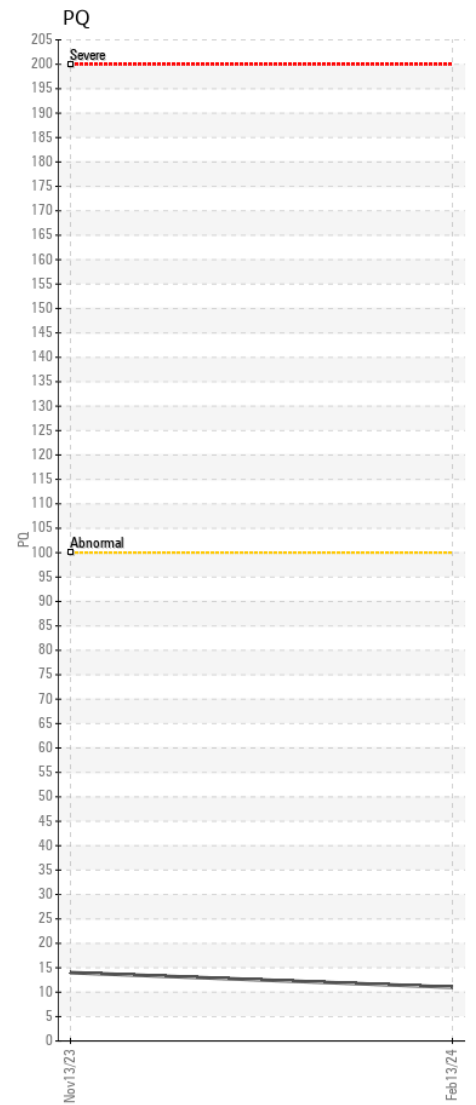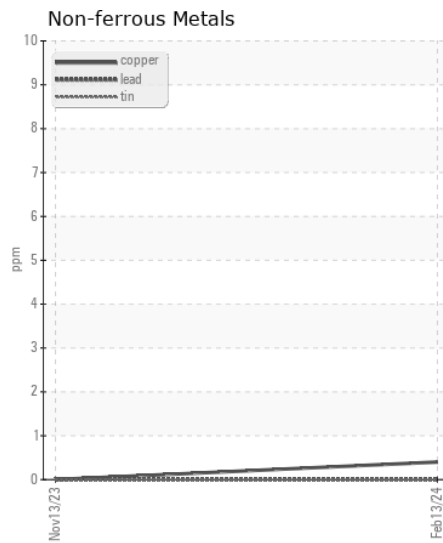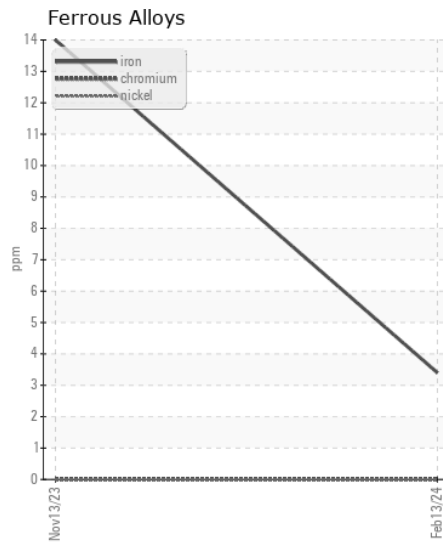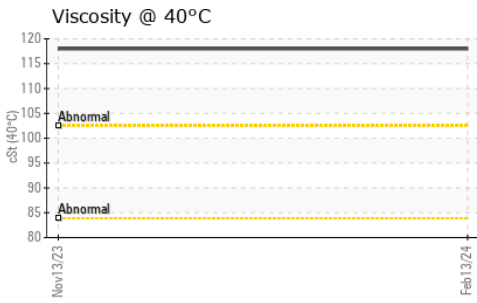

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0202193 **Received** : 14 Feb 2024
Lab Number : 06089089 **Tested** : 15 Feb 2024
Unique Number : 10876534 **Diagnosed** : 15 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432